





## ZAM Plus Rupture Disk Alarm Monitors

The ZAM series Alarm Monitor is a surface mounted monitor designed to remotely detect the condition of a rupture disk in service. Used in conjunction with the ZOOK ZENSOR®, BA, RDI, BI or similar devices, it will immediately warn the operator of a ruptured disk. The alarm system uses a normally closed electrical circuit. When the disk ruptures, it breaks the circuit, triggering the alarm.

The ZOOK ZAM alarm system is capable of detecting a ruptured disk condition in applications involving highly electrically conductive fluids. Contact ZOOK for more information regarding this type of application.

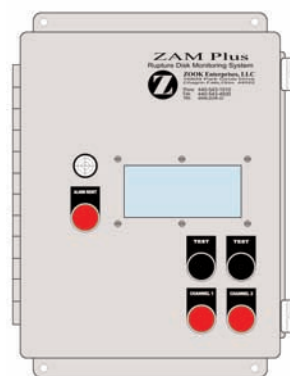


ZAM2  
2 Channel Monitor

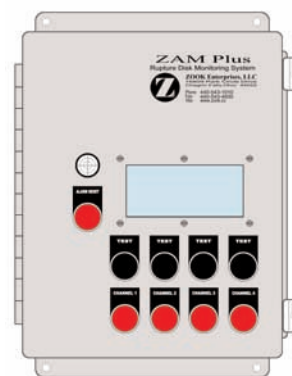


ZAM4  
4 Channel Monitor

### Features

- Intrinsically safe output for Class I, II, and III, Division 1, Groups A, B, C, D, E, F, and G hazardous locations.
- Utilizes FM approved,  $\text{Ex}$ ,  $\text{C}\text{E}$ , and  $\text{S}$ , compliant I.S. barrier.
- Enclosure: NEMA Type 12, constructed of 14 gauge steel with continuously welded seams and oil resistant seals.
- Provides an audio/visual signal and an output relay for each channel. Channel will automatically reset once the burst indicating device is replaced or reset.
- Audio alarm can be silenced with push button switch.
- Contains front panel push buttons for testing each channel. This function can also be performed remotely.
- Field replaceable I.S. barrier module and power supply.

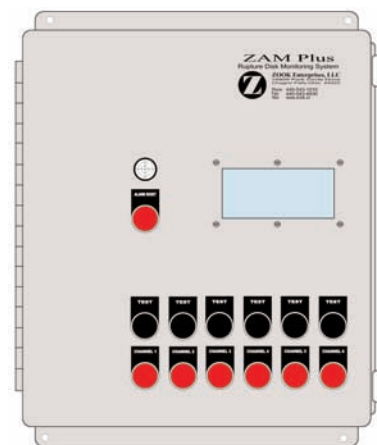

ZAM6  
6 Channel Monitor

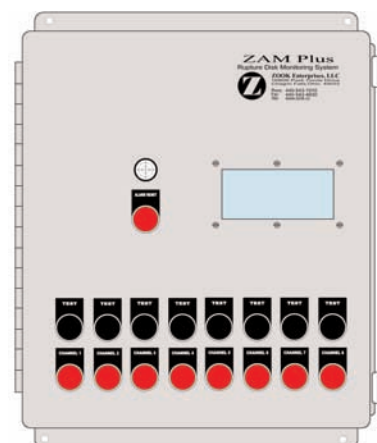

ZAM8  
8 Channel Monitor

### Specifications:

**Intrinsically safe sensing signal level:**  
10.5 VDC @ 13 mA max.

**Input Voltage:** 100–240 VAC @ 50/60Hz

**Monitor Sensing Level:** Open (Ruptured)

**Output Relay Contacts:** 1NO & 1NC (DPST)  
rated 4 Amps, 126.5 VAC (Resistive)

**Operating Temperature:** –4°F to +140°F

### Dimensions:

ZAM2 & ZAM4: 12" H x 10" W x 8" D

ZAM6 & ZAM8: 14" H x 12" W x 8" D

## Rupture Disk Monitor Technical Information


Under normal conditions, the alarm system is in a normally closed state. When the disk ruptures due to an over pressure condition, separation of the membrane (pressure sensing portion of the rupture disk) occurs – breaking the alarm electrical circuit.

The monitor wired to the burst indicating device will be activated providing immediate local or remote warning of a ruptured disk. The ZAM monitor allows output to control pumps, valves, and other equipment which may be activated to control or shutdown a process.

The ZAM Alarm Monitor can be used with the following burst indicating devices: ZENSOR®, BA, RDI, BI or similar devices. It will immediately warn the operator of a ruptured disk.

Contact ZOOK for compatibility with other manufacturers indication devices.

**Note:** A rupture disk with burst indicating device is considered a simple device, therefore, approval is not required. Installation must be in accordance with ANSI/ISA RP12.6 and the NEC (ANSI/NFPA 70)

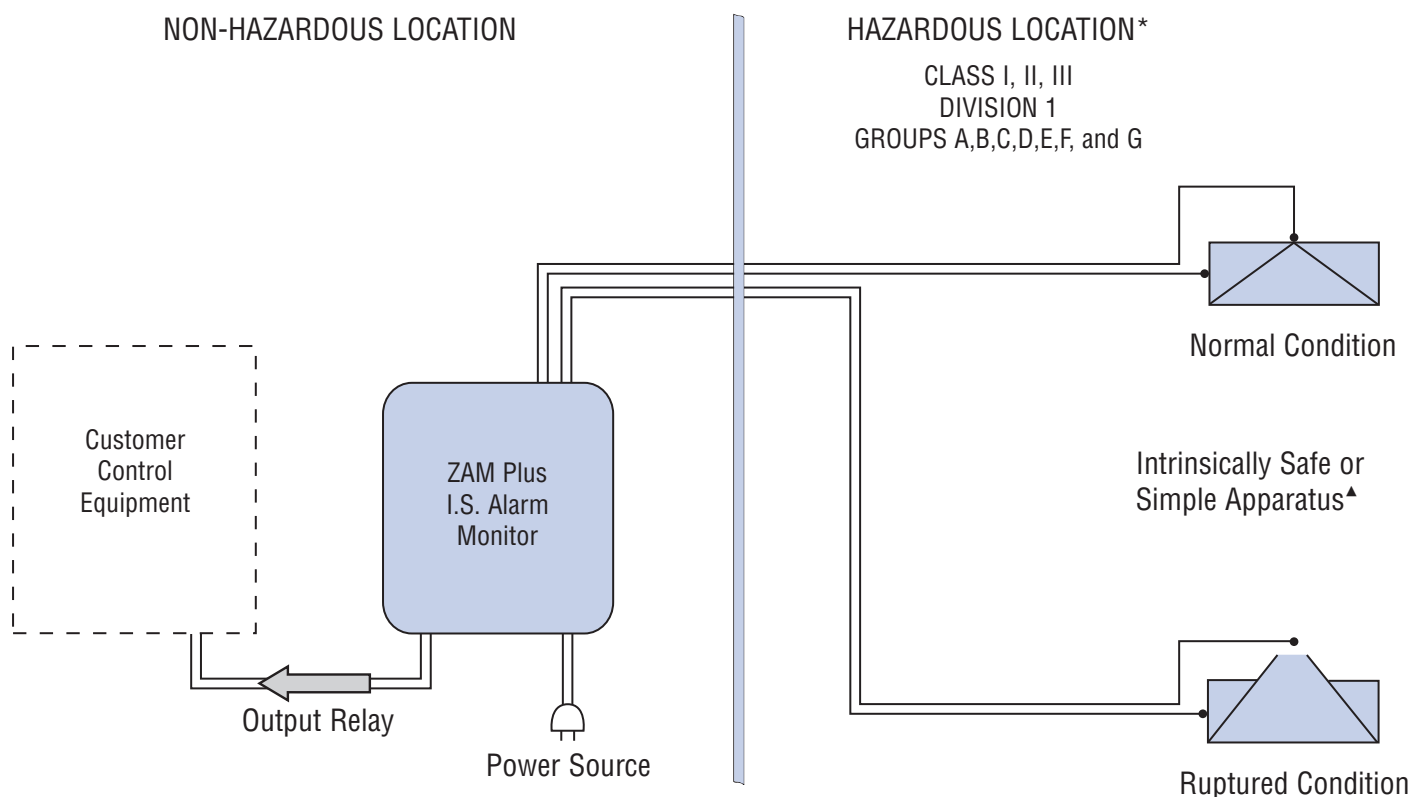

\*Contact ZOOK for information about mounting the ZAM Plus Alarm Monitor in hazardous locations.

<sup>▲</sup>Hazardous location equipment must be NEC compliant or simple apparatus.



### United States Operations

**ZOOK Enterprises, LLC**  
16809 Park Circle Drive  
Chagrin Falls, OH 44022  
Toll Free **800.543.1043**  
Phone **440.543.1010**  
Fax **440.543.4930**  
E-mail **sales@zook.cc**

### Canadian Operations

**ZOOK Canada, Inc.**  
4400 South Service Road  
Burlington, ON Can. L7L 5R8  
Toll Free **800.370.6057**  
Phone **905.681.2885**  
Fax **905.681.8838**  
E-mail **sales.canada@zook.cc**

### European Operations

**ZOOK Europe, LTD.**  
Unit 1.14, Great House Waterside Business Park  
Redwall Close, Rotherham Road  
Dinnington, Sheffield UK. S25 3QA  
Phone **0044 (0) 1909 560999**  
Fax **0044 (0) 1909 560860**  
E-mail **zookeurope@zook.cc**



visit us on the web at [www.zook.cc](http://www.zook.cc)