




Series
TFP-LI

Liquid Turbine Flow Meter

PPS Body, 0 to 5 VDC Output, LCD Indication



Flow Transmitters,
Turbine

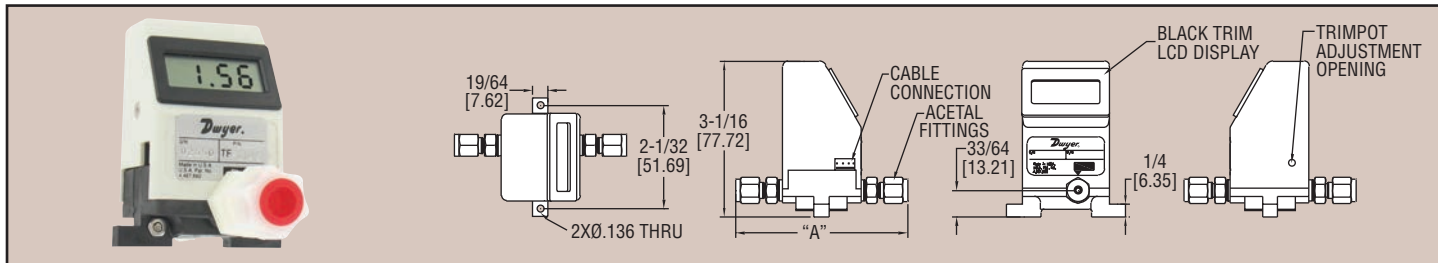

Series TFP-LI Liquid Turbine Flow Meters are suitable for a wide variety of industrial, commercial, and laboratory flow applications. These meters utilize a turbine wheel and electro-optical detection to convert flow rates into a linear 0 to 5 VDC output signal for recording and data logging. A 3-1/2 digit LCD informs the user of the actual flow rate. A power adapter or mating cable assembly is required for operation.

Model	Range	Connection	"A" (in)
TFP-LI03	.21 to 1.6 GPH (.013 to .1 LPM)	1/8" OD	3-27/64
TFP-LI04	.32 to 3.2 GPH (.02 to .2 LPM)	1/4" OD	3-13/16
TFP-LI05	.79 to 7.9 GPH (.05 to .5 LPM)	1/4" OD	3-13/16
TFP-LI06	1.6 to 16 GPH (0.1 to 1 LPM)	1/4" OD	3-13/16
TFP-LI07	3.2 to 32 GPH (.2 to 2 LPM)	1/4" OD	3-13/16
TFP-LI08	7.9 to 79 GPH (.5 to 5 LPM)	3/8" OD	4-1/8
TFP-LI09	16 to 160 GPH (1 to 10 LPM)	3/8" OD	4-1/8

ACCESSORIES

Model	Description
A-454	115 VAC Power Adapter and Signal Cable
A-455	230 VAC Power Adapter and Signal Cable
A-456	36" Mating Cable with Spliced Leads

SPECIFICATIONS

- Service:** Clean liquids compatible with wetted materials.
- Wetted Materials:** PPS, acetal, sapphire, glass, epoxy, and fluoroelastomer.
- Accuracy:** ±1% of full-scale.
- Linearity:** ±1% of full-scale.
- Repeatability:** ±0.2% of full-scale.
- Temperature Limits:** 41 to 131°F (5 to 55°C); Storage: 32 to 158°F (0 to 70°C); Sensitivity: ±0.2% of full-scale per °C.
- Pressure Limits:** 100 psig (6.8 bar).
- Process Connection:** Compression fitting, see model table.
- Power Requirements:** 11.5 to 15 VDC.
- Power Consumption:** 35 mA @ 12 VDC.
- Output Signal:** 0 to 5 VDC; Minimum 2.5 kΩ load.
- Electrical Connections:** Four-pin power and signal connector. A power adapter or mating cable required for operation. See accessories table.
- Display:** LCD, 0.39" (10 mm) digits (only in LPM).
- Enclosure Rating:** IP10 (NEMA 1).
- Weight:** 0.27 lb (121 g).
- Agency Approvals:** CE.