




Series
F6 & F7

Level Switches - Horizontal/Specialty

Low Cost, Hermetically Sealed Contacts

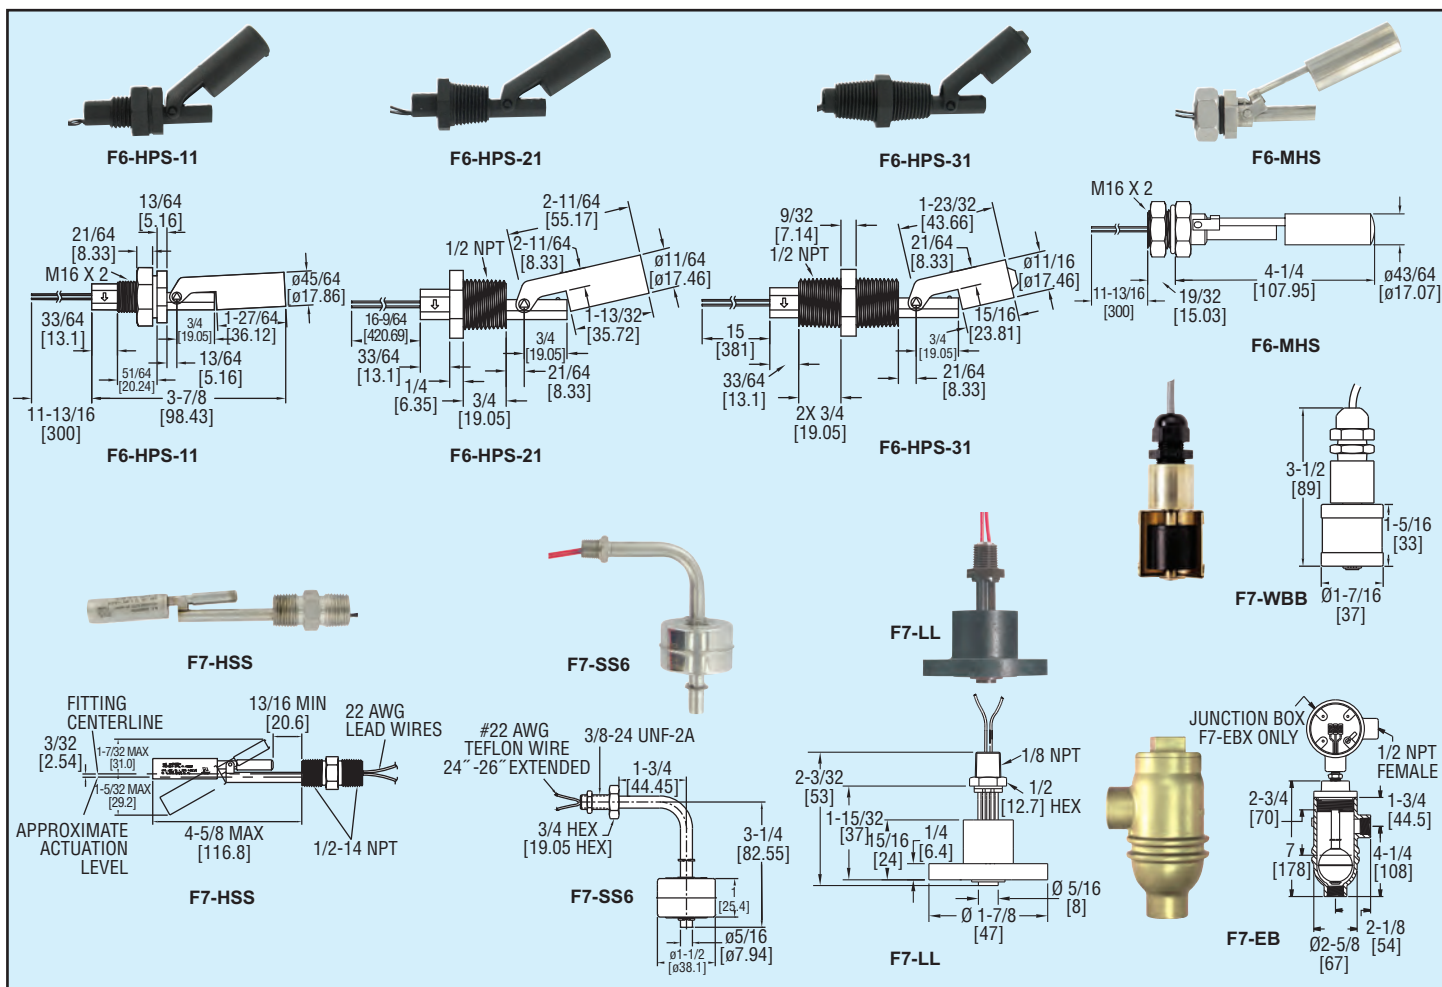

Series F6 & F7 Horizontal Mount Level Switches are designed to mount through the walls of tanks and other vessels. Internally mounted models F6-HPS-11, F6-MHS and F7-SS6 are secured to the wall of the tank or vessel from the inside while model F6-HPS-21 is mounted from the outside (externally). Model F7-HSS can be installed internally or externally.

Series F6 & F7 Specialty Level Switches are designed for unique applications. Model F7-SS6 can be used with viscous liquids or liquids with suspended metal particles. Use model F7-LL for low level detection ($\geq 5/8"$). The non-intrusive bottle style F7-EB mounts completely outside the tank at the actuation level. Suspend model F7-WBB in stand pipes or sumps for leak detection or drop into wells for ground-water monitoring.

Horizontal Float

Model	Applications	Material Float/Stem	Temperature Limits	Pressure Limits	Min. S.G.	Electrical Rating	Wire Leads	Mtg	Weight oz (g)
F6-HPS-11	Water, Oils, Chemicals	Polypropylene/Polypropylene	176°F (80°C)	116 psig (8 bar)	0.60	20 VA: 0.08A @ 240 VAC	22 AWG, 11.8" (30 cm)	M16 x 2	1.23 (38)
F6-HPS-21	Water, Oils, Chemicals	Polypropylene/Polypropylene	176°F (80°C)	116 psig (8 bar)	0.60	20 VA: 0.08A @ 240 VAC	22 AWG, 11.8" (30 cm)	1/2" NPT	1.23 (38)
F6-HPS-31	Water, Oils, Chemicals	Polypropylene/Polypropylene	176°F (80°C)	116 psig (8 bar)	0.60	20 VA: 0.08A @ 240 VAC	22 AWG, 11.8" (30 cm)	1/2" NPT	1.41 (40)
F6-MHS	Corrosives	304 SS/304 SS	257°F (125°C)	218 psig (15 bar)	0.85	20 VA: 0.08A @ 240 VAC	22 AWG, 11.8" (30 cm)	M16 x 2	3.35 (95)
F7-HSS†	High temp/pressure, corrosive, Expl.	316 SS/316 SS	392°F (200°C)	300 psig (20.7 bar)	0.60	30 VA: 0.14A @ 220 VAC	22 AWG, 24" (61 cm)	1/2" NPT (int/ext)	3 (94)

Specialty Switches

Model	Style/Applications	Material Float/Stem	Temperature Limits	Pressure Limits	Min. S.G.	Electrical Rating	Wire Leads	Mtg	Weight oz (g)
F7-SS6	Bent stem/liquids with metal particles	316 SS/ 316 SS	300°F (149°C)	100 psig 7 bar	0.70	20 VA: 0.08A @ 220VAC N.O. operation	22 AWG, 24" (61 cm)	3/8"-24" UNF-2A	2 (58)
F7-SS6B	Bent stem/liquids with metal particles	316 SS/ 316 SS	300°F (149°C)	100 psig 7 bar	0.70	20 VA: 0.08A @ 220VAC N.C. operation	22 AWG, 24" (61 cm)	3/8"-24" UNF-2A	2 (58)
F7-EB‡**	Non-intrusive bottle type/ outside tank mounting	Brass/ 316 SS (Brass housing)	300°F (149°C)	500 psig 34 bar	0.75	20 VA: 0.08A @ 240VAC	18 AWG, 24" (61 cm)	3/4" NPT female	5 lb 5 oz (2.4 kg)
F7-LL	Vertical/detect levels as low as 5/8"	Polysulfone/ Buna-N	180°F (82°C)	50 psig 3 bar	-	20 VA: 0.08A @ 240VAC	22 AWG, 72" (182 cm)	1/8" NPT male	2 (58)
F7-WBB	25 ft cable, slosh shield/ sumps, stand pipes	Brass/ Buna-N	180°F (82°C)	150 psig 10 bar	0.45	20 VA: 0.08A @ 240VAC	22 AWG, 25 ft (7.6 m)	-	10.8 (310)

† F7-HSS is rated explosion-proof for Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III.

‡ Explosion proof model available with DPDT switch. Specify F7-EBX.
** Model available with Normally Closed Switch. Specify F7-EBNC.



LEVEL

Level Switches, Float