Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

HS710 Hydraulic Pressure Comparison Pump

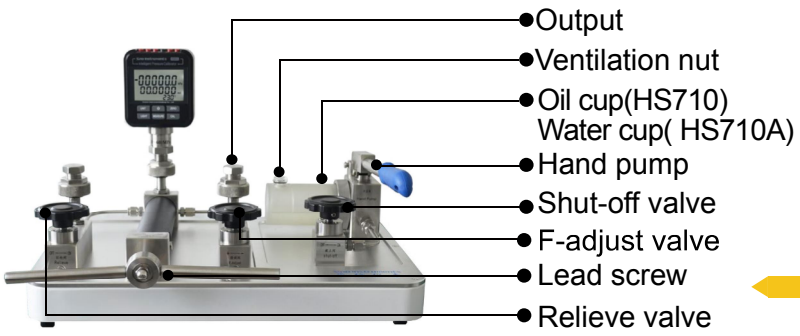

1.Range up to 700bar
2.Sliding block structure for second pump ,more save labor

Description

HS710 Hydraulic Pressure Comparison Pump adopts advanced stainless steel, with bench-top structure and designed to generate pressure range up to 700bar. The sliding block structure for screw pump design makes the high pressure operation more easy and save labor, and saves operation space without screw outside. That special F-adjust valve adjusts the exact pressure value and calibrate 2.5bar pressure instruments .The detachable Oil cup is easy to clean and maintenance, checking work medium timely from outside. 3pcs output with quick coupling makes it calibrated pressure instruments together. It widely calibrates pressure instrument in the laboratory.

Specifications

- **Generated pressure range:**(0~600/700)bar
- **Working media:**
  25#transformer oil Distilled water optional,The model HS710A
- **Material :**
  Body:Stainless Steel/Aluminium
  Seals:Buna-N
- **Adjust resolution:**1mbar
- **Output interface connection:**
  M20×1.5Female
- **Weight:**14.9Kg
- **Dimensions:**430L×330W×170H (mm)

Ordering Code

Model

HS710 HS710A	Model
M -M20×1.5 F N4-1/4"NPT F N4Type,MOQ 5pcs	M–Connection

Standard delivery

O ring:10pcs
Test report&Manual:1copy
Air cell:1pc

Optional Accessories

Model	Description
HS710-HSPA01	Fitting adaptor 10pcs
HS710-HSPA02	Fitting adaptor 10pcs
HS710-HSPA18	Fitting adaptor 18pcs
HS710-HSPA64	Fitting adaptor,hose,wrenches and so on (64pcs)
HS710-8	Digital pressure gauge HS108 or HX601 uses as master gauge
HS710-2	Pressure calibrator HS602 for calibration pressure transmitter

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it