



ALTS Thermal Flow & Level Switch

GENERAL

Smartmeasurement™ ALTS thermal switch represents the State-of-the-art in gas or liquid flow switching or liquid level controls. The ALTS provides the highest quality flow and level detection by using a high-resolution thermal differential technique. The sensor consists of a pair of matched Resistance Temperature Detectors (RTD's). One RTD is using a self-heated constant DC current. The other RTD is unheated and provides an accurate process temperature reference. The thermal differential created between the reference and the heated RTD pair is a function of the density and/or velocity of the media with which the sensor is in contact. The sensor and wetted parts are of durable 316L stainless steel, all welded construction with no moving parts. The switch is easy to install and adjust, giving reliable, low maintenance performance in the most demanding applications.



FEATURING

- ❑ Mass flow Switch for the detection of the mass flow rate of liquids and gases
- ❑ No moving parts and no leak paths, no O-rings or graph oil seals to wear, fail or leak.
- ❑ Point level switch for liquid level detection
- ❑ Wide operating temperature range -70C to 458C (-100F to +850F)
- ❑ Flow Switch range of 0 to 1.5 mps (5 fps) liquids and 0.07 to 150 mps (500 fps) gases
- ❑ Level Switch switches on level change 0.076 cm (0.03 inch)
- ❑ Fast flow switch response time of 0.5 to 10 seconds (media dependent)
- ❑ Level switch response time of 0.1 to 1 second of wetting (media dependent)
- ❑ CE, CENELEC and CSA approvals
- ❑ Insertion length from 1.27cm to 100 cm



SPECIFICATION

- | | |
|--|---|
| <ul style="list-style-type: none"> ● Process Connection : 0.75" MNPT standard. 0.5 to larger MPNT, Sanitary and flanges optional ● Process temperature : -70C to 200C (-100F to 390F) standard Medium T to 300C (572F) and High T to 485C (850F) ● Operating pressure : to 207 bar (3000 psia) ● Velocity Range : Depends on fluids Liquids : 0 to 1.5 mps Adjustable flow rate Gas: 0.07 to 150 mps Adjustable flow rate ● Repeatability : +/- 1% of set point (Flow) or 1/32" (0.8mm) Level ● Material : 316 SS standard. Hastelloy, Monel, Inconel, etc | <ul style="list-style-type: none"> ● Housing protection : Explosion Proof; NEMA 3,4X,7,9 ● Ex-protection : CSA, FM, UL, CENELEC and EECS approved ● Power requirements : 115 VAC, 50/60Hz or 230 VAC, 50/60Hz 24VDC optional. 3.1 Watt maximum Electronics: -40C to 60C (-40F to 140F) ● Output: 5A. 250 VAC. DPDT with fail safe capability ● Insertion Length: 2.0" standard. 0.5" or greater optional ● Flow Switch: over a range of +/-10C. ● Temperature compensated through entire range. ● Stability: Drift <0.5% from calibrated set point |
|--|---|

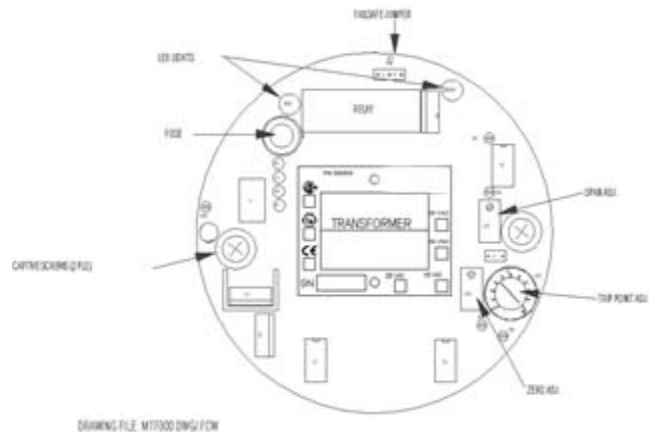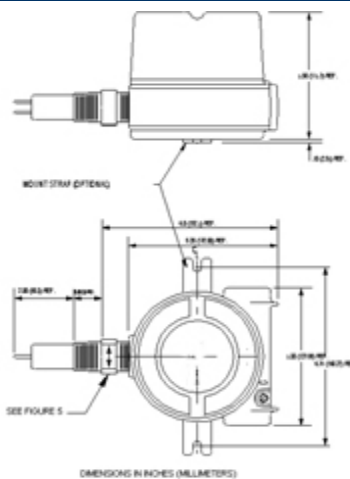

Smartmeasurement LLC.

2960 Polk St. Suite 12, San Francisco, CA 94109 USA
TEL : +1- 415 - 673 - 0143 FAX : +1- 415 - 673 - 4416

URL : <http://www.smartmeasurement.com>
e-mail : sales@smartmeasurement.com

ALTS

Procedures to specify ALTS Flow and Level switch

You also need to provide the following information:

| | |
|-----------------------|--|
| Type of liquid | We need the name of your liquid, or gas |
| Switch point settings | Flow set point and units.. |
| Line Size | we need to know your pipe size as well connection type (flange, threaded, etc..) |
| Process Temperature | We calibration your Flowmeter as close to your application as possible |
| Type of Electronics | Indicate if you want integral or remote mounted |
| Power Requirements | Specify your power requirements such as 24 VDC or 115 VAC or 230 VAC |

| ALTS Thermal flow & level switches | | | | | | | | | | |
|---------------------------------------|------|------|-----|-------|-------|-----|-----|--|--------------------|----------|
| ALTS-FS4200 flow switch | XX | XXXX | XXX | | XX" | XXX | XXX | | Description | |
| ALTS-FS3200 - level switch | XX | XXXX | XXX | | XX" | XXX | XXX | | Description | |
| CSA approvals | CSA | | | | | | | | Agency Approvals | |
| Cenelec Approvals | CNL | | | | | | | | | |
| No Approvals | NX | | | | | | | | | |
| 0.75" MNPT (Standard) | 0750 | | | | | | | | Process connection | |
| 0.5" MPNT | | 050 | | | | | | | | |
| 1" MNPT | | 100 | | | | | | | | |
| Raised face flange 150# 1" | | RA1 | | | | | | | | |
| Raised face flange 150# 2" | | RA2 | | | | | | | | |
| Raised face flange 300# 1" | | RB1 | | | | | | | | |
| Raised face flange 300# 2" | | RB2 | | | | | | | | |
| Special | | SPL | | | | | | | | |
| Sanitary with 3A stamp | | 3A1 | | | | | | | | |
| 316 SS (Std) | S6 | | | | | | | | Sensor Material | |
| 304 SS | | S4 | | | | | | | | |
| 304L SS | | SL | | | | | | | | |
| Hastelloy B | | HB | | | | | | | | |
| Hastelloy C | | HC | | | | | | | | |
| Inconel 600 | | IO | | | | | | | | |
| Monel | | MN | | | | | | | | |
| Alloy 20 | | A2 | | | | | | | | |
| Special Material | | SM | | | | | | | | |
| Local Electronics | | LE | | | | | | | | Mounting |
| Remote electronics with 3 meter cable | RE | | | | | | | | | |
| 2 inch standard | | | | 002.0 | | | | | Insertion length | |
| 000.00 (0.5" and greater) | | | | ?? | | | | | | |
| 24VDC | | | | | DC24 | | | | Power requirement | |
| AC120 | | | | | AC110 | | | | | |
| AC220 | | | | | AC220 | | | | | |
| 200-300C | | | | | NT | | | | Temperature | |
| 300-458 C | | | | | HT | | | | | |
| Calibration required | | | | | CB | | | | | |
| Extended Neck (high temp) | | | | | EN | | | | | |
| Explosion Proof Window | | | | | XW | | | | | |
| Variable insertion | | | | | V1 | | | | | |
| Hot Tap (live) | | | | | LT | | | | | |
| DS (double sided enclosure) | | | | | DS | | | | | |
| Thermocouple output | | | | | THM | | | | | |
| RTD output | | | | | RTD | | | | | |
| CE Approvals | | | | | CE | | | | | |