

Flange Mounted Composite Forward-Acting Metal Bursting Disc

FD Series Discs mount directly between flanges (no holder required), with the concave surface facing the process media. The laser cut determines the burst rating of the disc. When the FD Series Disc bursts, it opens along the predetermined pattern and folds back against the flange.



Options

Vacuum Support

Vacuum Supports are required for vacuum service. Vacuum supports are attached to the process side of the disc and allow the disc to withstand full vacuum. Consult ZOOK Europe Ltd if back pressures are in excess of 1 barg (15 psig) or cycling is present.

Protective Ring

Protective Rings can be used with FD Series Discs to protect delicate materials and/or to provide stability

Seal / Liners

The design of the FD Series allows the use of highly corrosive-resistant seal materials. A wide variety of metal and TFE seal materials are available

Ordering Information

When ordering, please provide:

- Flange type (e.g. Weld-neck, slip-on, threaded, etc).
- Flange standard (e.g. ANSI B16.5).
- Flange I.D.
- An installation gap is required between flanges to fit domed disc.

FD-R	Slotted metal top section and a TFE or metal seal with a protective bottom ring
FD-V	FD Disc with a bottom vacuum support

Features

- Forward-acting, tension-loaded design, with laser slotted top section and metal or TFE seal.
- Fragment resistant design with Teflon® seal.
- Disc can handle a system operating pressure of up to 85% of the disc's minimum rated burst pressure.
- Seat Configuration: Flange mounted - no holder required.
- Sizes: 50 mm to 300 mm. For other sizes consult ZOOK.
- Burst ratings from 0.21 barg to 25 barg, depending on disc size.
- Temperature ratings to 482°C (900°F), depending on seal material.
- Suitable for liquid, gas or 2-phase flow.
- 3-Dimensional stainless steel tag permanently engraved with complete disc specifications.
- Standard top and bottom gasket KLINGER®sil C-4401*, other materials available on request.

**Synthetic fibre gasket with Nitrile binder.
149°C gas or steam service or 244°C liquid service.*



ZOOK Enterprises, LLC
16809 Park Circle Drive
Chagrin Falls, OH 44022 U.S.A.
Toll Free **800.543.1043**
Phone **440.543.1010**
Fax **440.543.4930**
E-mail **sales@zook.cc**

ZOOK Canada, Inc.
4400 South Service Road
Burlington, ON Can. L7L 5R8
Toll Free **800.370.6057**
Phone **905.681.2885**
Fax **905.681.8838**
E-mail **sales.canada@zook.cc**

ZOOK Europe, LTD.
Navigation House, Bridge Street
Killamarsh, Sheffield UK. S21 1AL
Phone **0044 (0) 1909 560999**
Fax **0044 (0) 1909 560860**
E-mail **zookeurope@zook.cc**




Flange Mounted FD Series Composite Metal Bursting Discs

Specifications - FD Series Minimum and Maximum Pressure Ratings (barg) @ 22°C

Burst Pressure Table for the F-D Series Flange Mounted Discs

Disc Nominal Size	Minimum Burst Pressure Rating (Barg) for each available Seal material						Maximum Burst Rating by size (Barg)	M.N.F.A. F-DR Disc (cm2)	M.N.F.A. F-DV Disc (cm2)
	Teflon (Standard Seal Material)	Aluminium	Nickel	Monel	Inconel	316ss			
50 mm	1.03	1.72	5.52	6.21	8.28	11.38	25.00	20.58	19.50
80 mm	0.69	1.03	3.79	4.83	6.55	8.62	20.00	45.29	42.91
100 mm	0.55	0.83	2.76	3.45	5.17	6.21	18.00	78.01	73.94
150 mm	0.41	0.69	2.41	2.76	4.14	5.17	15.00	177.11	167.75
200 mm	0.31	0.55	1.72	2.41	2.76	4.14	12.00	293.76	260.47
250 mm	0.28	0.48	1.52	2.07	2.07	3.1	10.00	483.32	457.90
300 mm	0.21	0.48	1.31	1.72	1.72	2.76	8.00	693.20	656.75
Max Temp	260°C	316°C	427°C	482°C	538°C	482°C			

Typical Installation

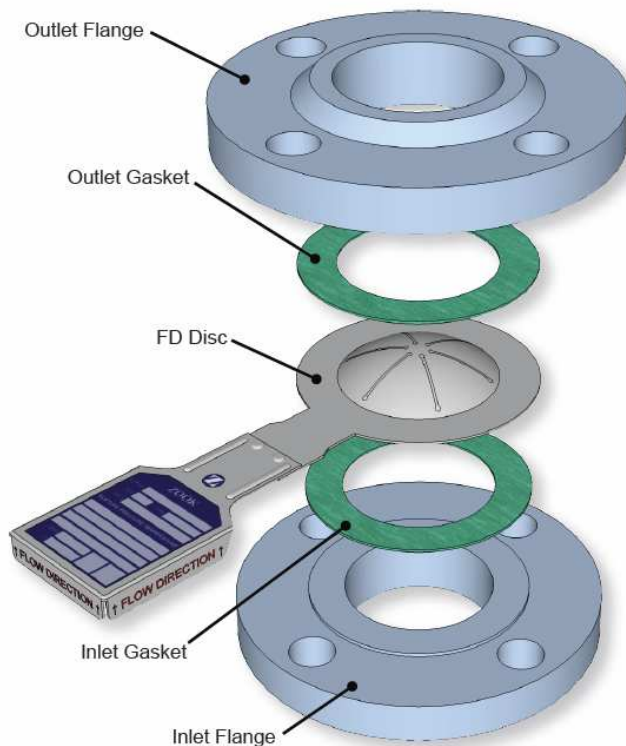

Note: An installation gap is required between the flanges to allow for the disc to be installed without damaging the dome of the disc.

Total Performance Tolerance (barg)

Burst Pressure (barg)		Available Performance Tolerance			
Min.	Max.	Standard	Good	Better	Best
			(Cost Adder)		
0.025	< 0.069	± 75%	± 73%	± 70%	± 0.017 barg
0.069	< 0.172	± 65%	± 45%	± 35%	± 0.023 barg
0.172	< 0.276	± 50%	± 30%	± 20%	± 0.035 barg
0.276	< 0.483	± 50%	± 30%	± 20%	± 0.035 barg
0.483	< 0.759	± 50%	± 30%	± 20%	± 0.055 barg
0.759	< 1.034	± 25%	± 20%	± 15%	± 0.090 barg
1.034	< 1.172	± 25%	± 20%	± 15%	± 0.138 barg
1.172	< 1.793	± 25%	± 20%	± 15%	± 0.138 barg
1.793	< 2.759	± 20%	± 15%	± 10%	± 0.138 barg
2.759	< 4.552	± 15%	± 10%	± 7.5%	± 5%
4.552	< 6.966	± 15%	± 10%	± 7.5%	± 5%
6.966	< 10.414	± 10%	± 7.5%	± 6.5%	± 5%
10.414	< 13.862	± 10%	± 7.5%	± 6.5%	± 5%
13.862	< 24.207	± 10%	± 7.5%	± 6.5%	± 5%
24.207	< 34.483	± 10%	± 7.5%	± 6.5%	± 5%
34.483	Max	± 10%	± 7.5%	± 6.5%	± 5%

Notes:

Disc will be marked with the specified burst pressure and will burst within applicable rupture tolerance based on the marked pressure.



ZOOK Enterprises, LLC
 16809 Park Circle Drive
 Chagrin Falls, OH 44022 U.S.A.
 Toll Free **800.543.1043**
 Phone **440.543.1010**
 Fax **440.543.4930**
 E-mail **sales@zook.cc**

ZOOK Canada, Inc.
 4400 South Service Road
 Burlington, ON Can. L7L 5R8
 Toll Free **800.370.6057**
 Phone **905.681.2885**
 Fax **905.681.8838**
 E-mail **sales.canada@zook.cc**

ZOOK Europe, LTD.
 Navigation House, Bridge Street
 Killamarsh, Sheffield UK. S21 1AL
 Phone **0044 (0) 1909 560999**
 Fax **0044 (0) 1909 560860**
 E-mail **zookeurope@zook.cc**



visit us on the web at www.zook.cc