



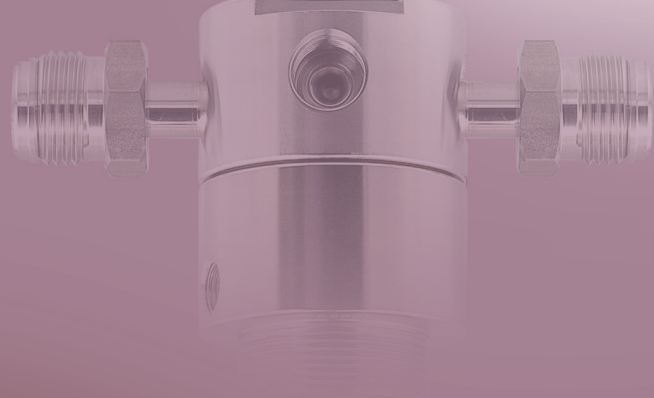


DRA200 S E R I E S


UHP TIED DIAPHRAGM
LOW PRESSURE VCR TYPE

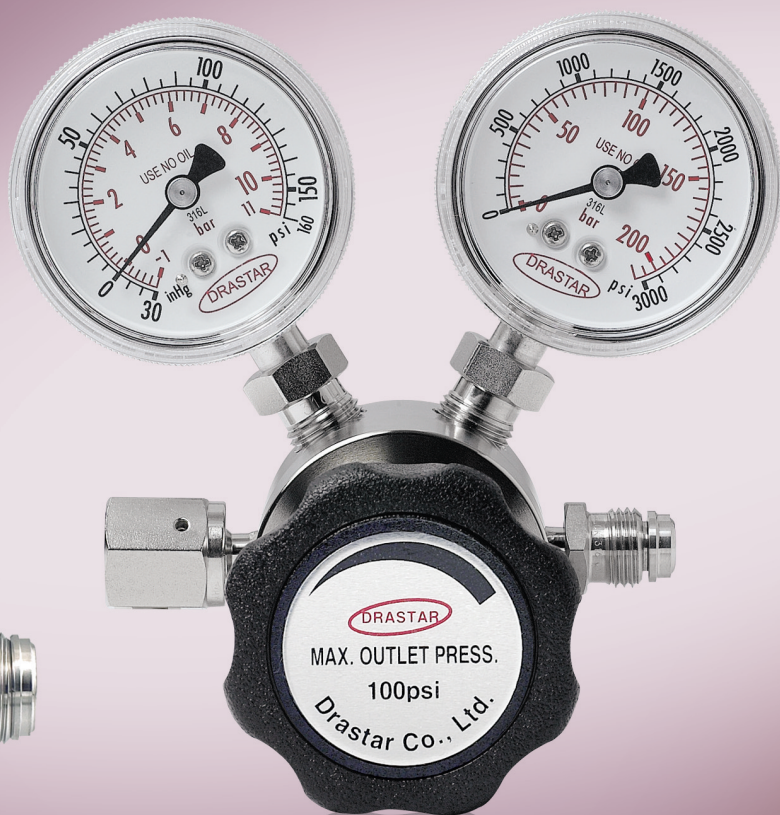

DRA200 SERIES

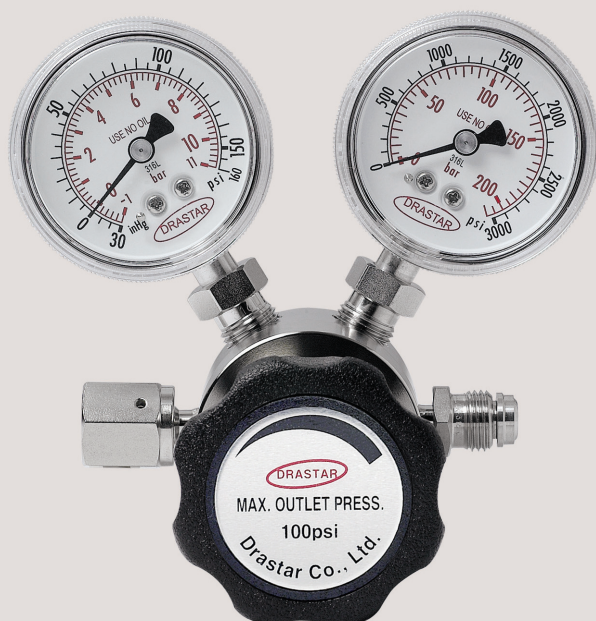

FUNCTIONAL SCHEMATIC

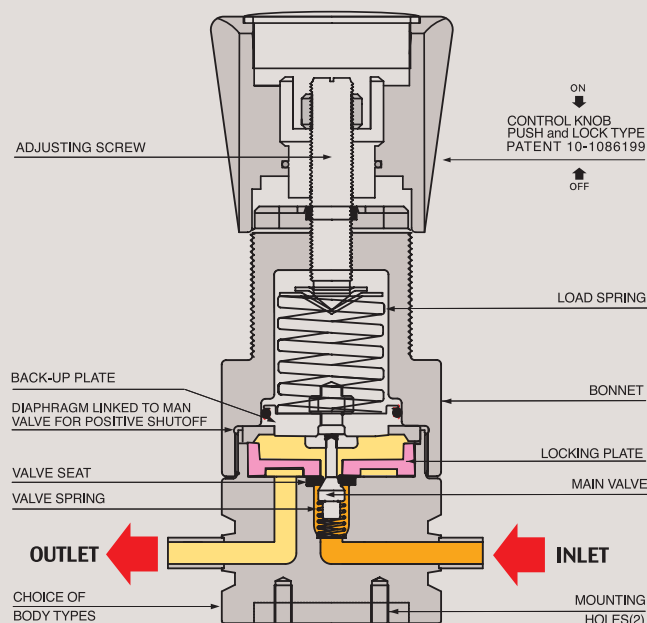

DRA200(Tied type)

UHP Tied Diaphragm Low Pressure VCR type (1/4" 3/8" 1/2" 3/4")

DRA 200 Series is an UHP low pressure reducing regulator with B.A. 25Ra, E.P. 10Ra, or E.P. 5Ra surface finishes and applicable for gas cabinet for semiconductor manufacturing, specialty gases, valve manifold boxes, and other research labs, etc. Inlet pressures are 3600psig (250bar) or 600psig (42bar) and outlet pressures are 5psig (0.3bar) up to 250psig (17bar).

With DRASTAR' s patented (patent #1086199) "push and lock type handle", you can operate it easily and stably; "locking" by pushing down the handle will prevent any slight change of pre-set pressure value, which could possibly be caused by any vibration from gas pipeline or ambient applications and the other way "unlocking" by pulling it back enables you to adjust the pressure value freely again.

Features and Applications

- 1/4", 3/8", 1/2", and 3/4" VCR type
- Tied-diaphragm design for positive shut-off and protecting the rupture of diaphragm
- Surfaces finishes to B.A. 25Ra, E.P. 10 Ra or E.P. 5 Ra microinch
- Push and lock type handle (DRASTAR patent No. 10-1086199) mounted
- Threadless type: enhanced particle prevention by adopting the locking-plate seal system (DRASTAR patent #10-0753280)
- All works of welding, assembly, test and cleaning are performed in class 100 and class 10 clean-rooms
- Design proof pressure: 150% of maximum rated
- Applicable for Semiconductor manufacturing gas line, toxic gases, pyrophoric gases, and high corrosive gases

Each product is manufactured taking into consideration of the best safety and easy manipulation. However in order to use the regulator in most safe, effective, precise and smooth way and prolong its life time, you are recommended to use the actual pressure within the range of 25% ~ 75% of its rated pressure.


REFERENCE

This catalogue is printed as of January 2018, and the dimensions and/or specifications in this catalogue can be changed without prior notice in the course of constant upgrading and improvement of our products.


INSTALLATION DIMENSIONS

METRIC EQUIVALENTS ARE IN PARENTHESES


GAUGE PORT OPTIONS

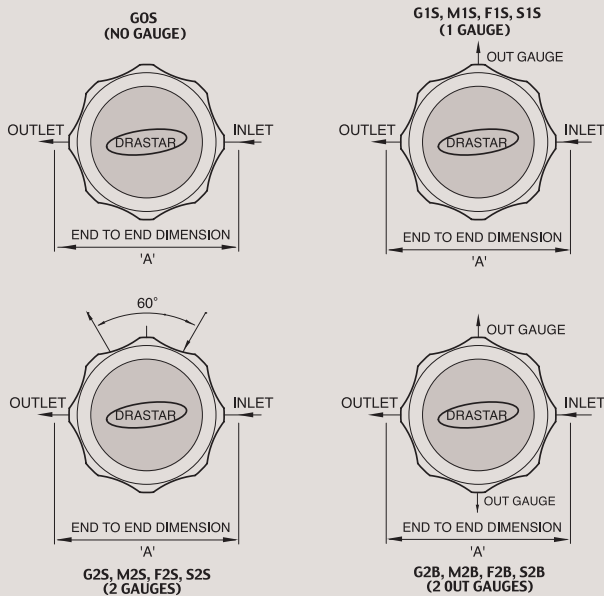

1/4" & 3/8"

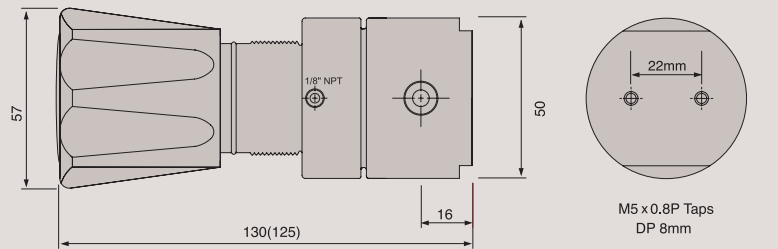

1/2" & 3/4"

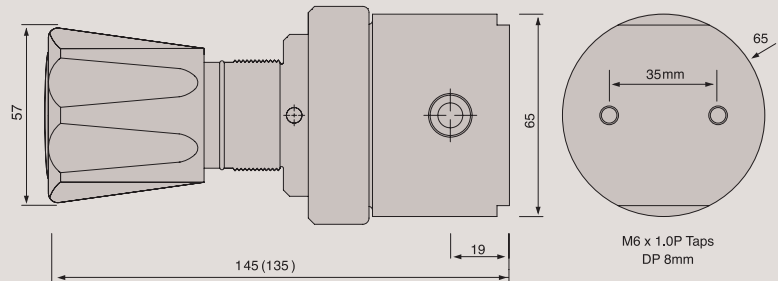

ORDERING INFORMATION

DRA200 - A 025 S - H P S - 4MS - G0S

BASIS SERIES

BODY MATERIAL & SURFACE FINISH

A = 316L, B.A 25Ra
B = 316L, E.P. 10Ra
C = 316L, E.P. (P.E.P) 5Ra
D = 316L, E.P. VAR 10Ra
E = 316L, E.P. VAR(P.E.P) 5Ra

B.A. = Brigh Annealed., E.P. = Electropolished.

OUTLET PRESSURE RANGE

025 = 1-25psi (.1-1.7bar)
050 = 1-50psi (.1-3.5bar)
100 = 1-100psi (.1-7bar)
250 = 1-250psi (.2-17bar)

DIAPHRAGM MATERIAL

S = STS 316L
H = Hastelloy-C

MAX. INLET PRESSURE

H = 3600psi(250bar)
L = 600psi(42bar)

SEAT MATERIAL

P = PCTFE
T = Teflon
V = Vespel

GAUGE PORTS OPTIONS

G0S = None 0	F1S = 1/4" Femle Swivel 1
G1S = 1/4" H.P.I.C 1	F2S = 1/4" Femle Swivel 2
G2S = 1/4" H.P.I.C 2	F2B = 1/4" Femle Swivel 2
G2B = 1/4" H.P.I.C 2	S1S = 1/4" Fixed Male 1
M1S = 1/4" Male Sw. 1	S2S = 1/4" Fixed Male 2
M2S = 1/4" Male Sw. 2	S2B = 1/4" Fixed Male 2
M2B = 1/4" Male Sw. 2	





INLET / OUTLET PORTS SIZE & Type "A" ±1.5mm

4HP = 1/4" H.P.I.C
4MS & 4FS = 1/4" Male, Femle Swivel 94mm
4ML & 4FL = 1/4" Male, Femle Swivel 114.00mm
8MS & 8FS = 3/8" Male, Swivel 120.00mm
8ML & 8FL = 3/8" Male, Femle Swivel 120.00mm
2MS & 2FS = 1/2" Male, Femle Swivel 140.00mm
2ML & 2FL = 1/2" Male, Femle Swivel 180.00mm
3MS & 3FS = 3/4" Male, Femle Swivel 160.00mm
3ML & 3FL = 3/4" Male, Femle Swivel 000mm
IMF = In Port Male / Out Port Female 000mm
IFM = In Port Female / Out Port Male 000mm
4TS = 1/4" Tube Stubs 94.00mm
3TS = 3/4" Tube Stubs 160.00mm




FLOW CAPACITY

S = Cv 0.06 Standard (Inlet 3000psi) (1/4")
O = Cv 0.2 Optional (Inlet 500psi) (1/4")
S = Cv 0.2 Standard (3/8")
S = Cv 0.5 Standard (1/2")
O = Cv 1.0 Optional (1/2")
S = Cv 1.2 Standard (3/4")

FLOW CHART

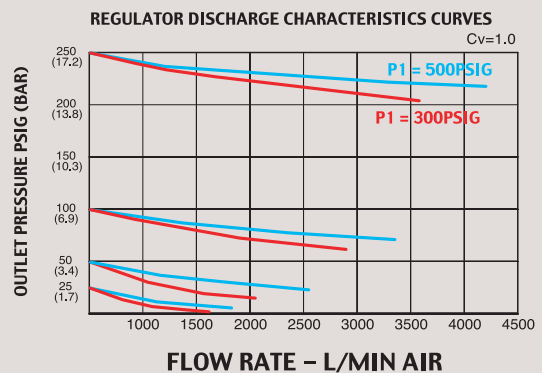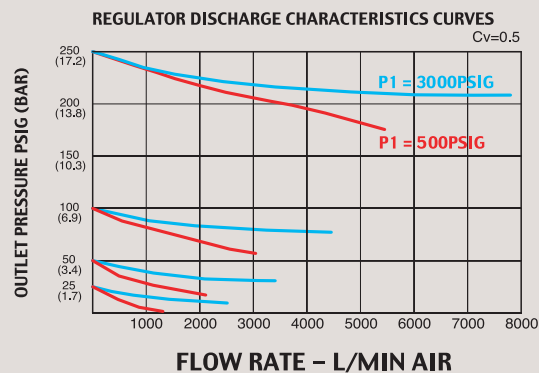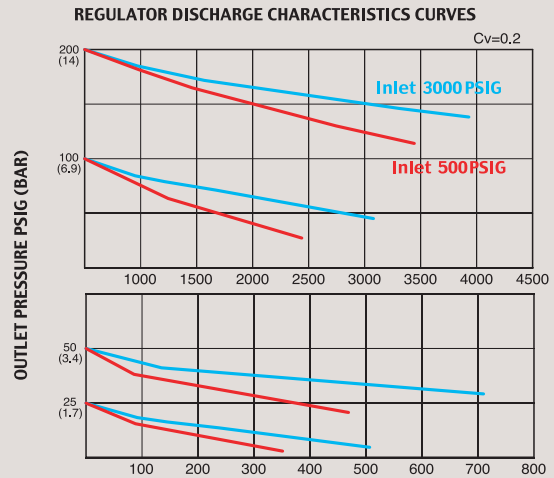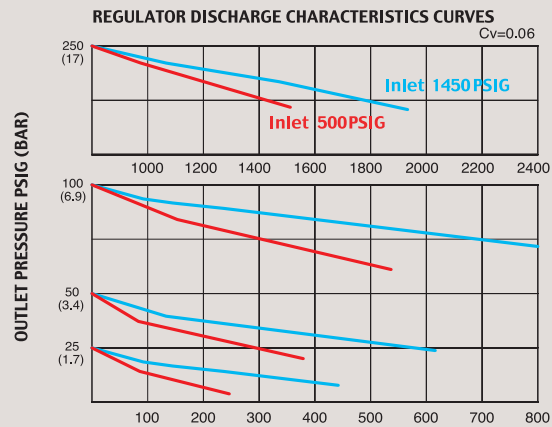

DRA200 Series 1/4" & 3/8"

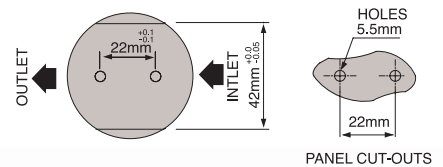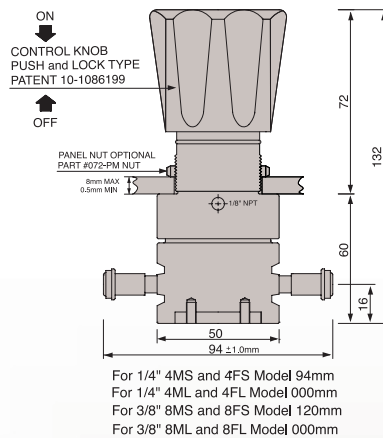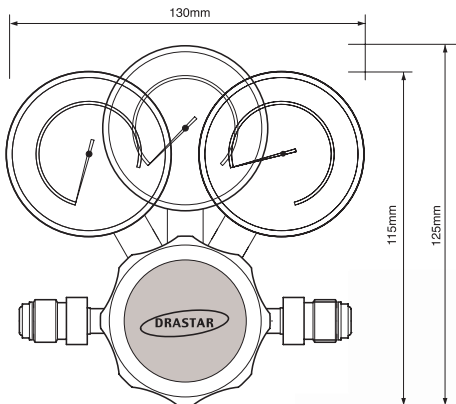

DRA200 Series 1/2" & 3/4"

