Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

ClearView Calibration Cylinders

CLEARVIEW ***has been developed for the accurate calibration of metering pumps. Available in polypropylene, PVC and glass, standard features include:***

- exceptional clarity
- chemical resistant
- break resistant
- threaded, socket or flanged
- removable "O" ring sealed top
- float level indicator
- PVC has dual scale USGPH & ml
- PVC sizes 100 - 20000 ml
- POLY & glass sizes 100 - 4000 ml
- glass cylinders maintenance friendly and fully field serviceable

PRIMARY FLUID SYSTEMS INC.
Call Toll Free 1-866-324-6422
Tel (905)333-8743 Fax (905) 333-8746
E-Mail: ecovalve@ecovalve.ca
www.ecovalve.ca

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

ClearView Calibration Cylinders

CV - PVC Cylinders

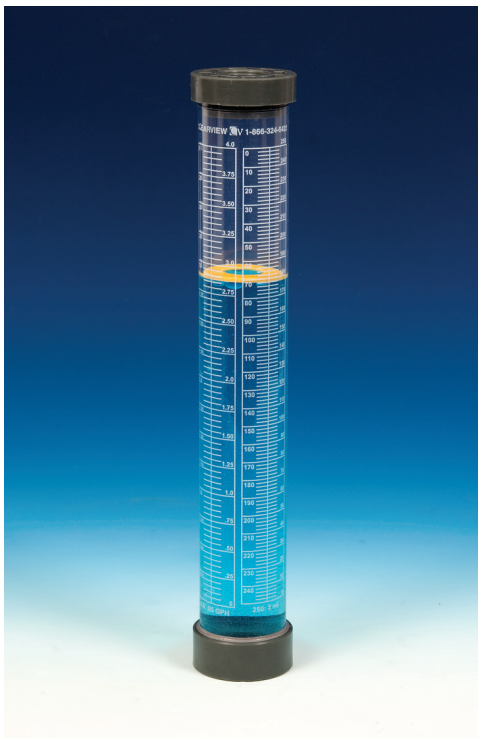

CV#4 with highly visible float indicator

CVF Flanged Style

How to order CLEARVIEW PP and PVC Calibration Cylinders:

e.g.: CV#1-1000-B

CV #1 - 1000 B

Type
PP = polypropylene
CV = PVC
CVF = PVC Flanged

Style:
1 = bottom thr'd conn. only
2 = Top/bottom thr'd conn.
3 = bottom thr'd conn. c/w removable vented dust cap
4 = Top/Bottom thr'd conn. c/w removable "O" ring sealed top and float ring level indicator

Standard connection is NPT thr'd
Optional (add suffix)
B = BSPT thread
S = Socket ASTM
DS = Socket DIN
D = Flanged DIN

Size Conn. Size	Volume	Material	
100 =	100 ml	(1.6 GPH)	PP & PVC	1/2" (15 DN)
250 =	250 ml	(4 GPH)	PP & PVC	1/2" (15 DN)
500 =	500 ml	(8 GPH)	PP & PVC	1/2" (15 DN)
1000 =	1000 ml	(16 GPH)	PP & PVC	1/2" (15 DN)
2000 =	2000 ml	(32 GPH)	PP & PVC	1" (25 DN)
4000 =	4000 ml	(64 GPH)	PP & PVC	1" (25 DN)
10000 =	10000 ml	(160 GPH)	PVC only	2" (50 DN)
15000 =	15000 ml	(240 GPH)	PVC only	2" (50 DN)
20000 =	20000 ml	(320 GPH)	PVC only	2" (50 DN)

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

ClearView Calibration Cylinders

ClearView Glass Cylinders

- maintenance friendly
- fully field serviceable
- high impact temperature resistant polycarbonate outer shield
- union connection design
- wetted connections in PVC, CPVC, PVDF, polypropylene, S/S, Hastelloy or Alloy 20
- size range 100 ml to 4000 ml
- other materials available on request

How to order CLEARVIEW Glass Calibration Cylinders:

CVG - ClearView Glass Calibration Cylinder with PVC union nuts.

Size

100	100 ml glass cylinder with 1 ml graduations
250	250 ml glass cylinder with 2 ml graduations
500	500 ml glass cylinder with 5 ml graduations
1000	1000 ml glass cylinder with 10 ml graduations
2000	2000 ml glass cylinder with 20 ml graduations
4000	4000 ml glass cylinder with 25 ml graduations

Insert Material

PVC	Polyvinylchloride
CPVC (Corzan)	Chlorinated polyvinylchloride
PP	Polypropylene
PVDF	Polyvinylidene flouride
S/S	316 Stainless Steel

Connection Size

50	1/2"	15 DN	(standard on 100, 250, 500, 1000 ml sizes)
75	3/4"	20 DN	(available on 500 and 1000 ml sizes)
10	1"	25 DN	(standard on 2000 and 4000 ml sizes; available on 500 and 1000 ml sizes)
15	1-1/2"	40 DN	(available on 2000 and 4000 ml sizes)
20	2"	50 DN	(available on 4000 ml size)

Connection Type

N	NPT
B	BSPT
S	Socket ASTM
DS	Socket DIN
F	Flanged ANSI
DF	Flanged DIN

Wetted "O" Ring

V	Viton (standard)
E	EPDM (ethylene propylene diene monomer)
K	Kalrez
T	PTFE encapsulated

Union Nut Options (PVC Standard)

CPVC	Chlorinated polyvinylchloride
PP	Polypropylene
PVDF	Polyvinylidene flouride

CVG - 2000 - PP - 10 - N - V - PP

Example: 2000 ml glass cylinder with PP wetted inserts, Viton "O" rings, 1" npt connections and PP union nuts.

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

ClearView Calibration Cylinders

Typical Installation

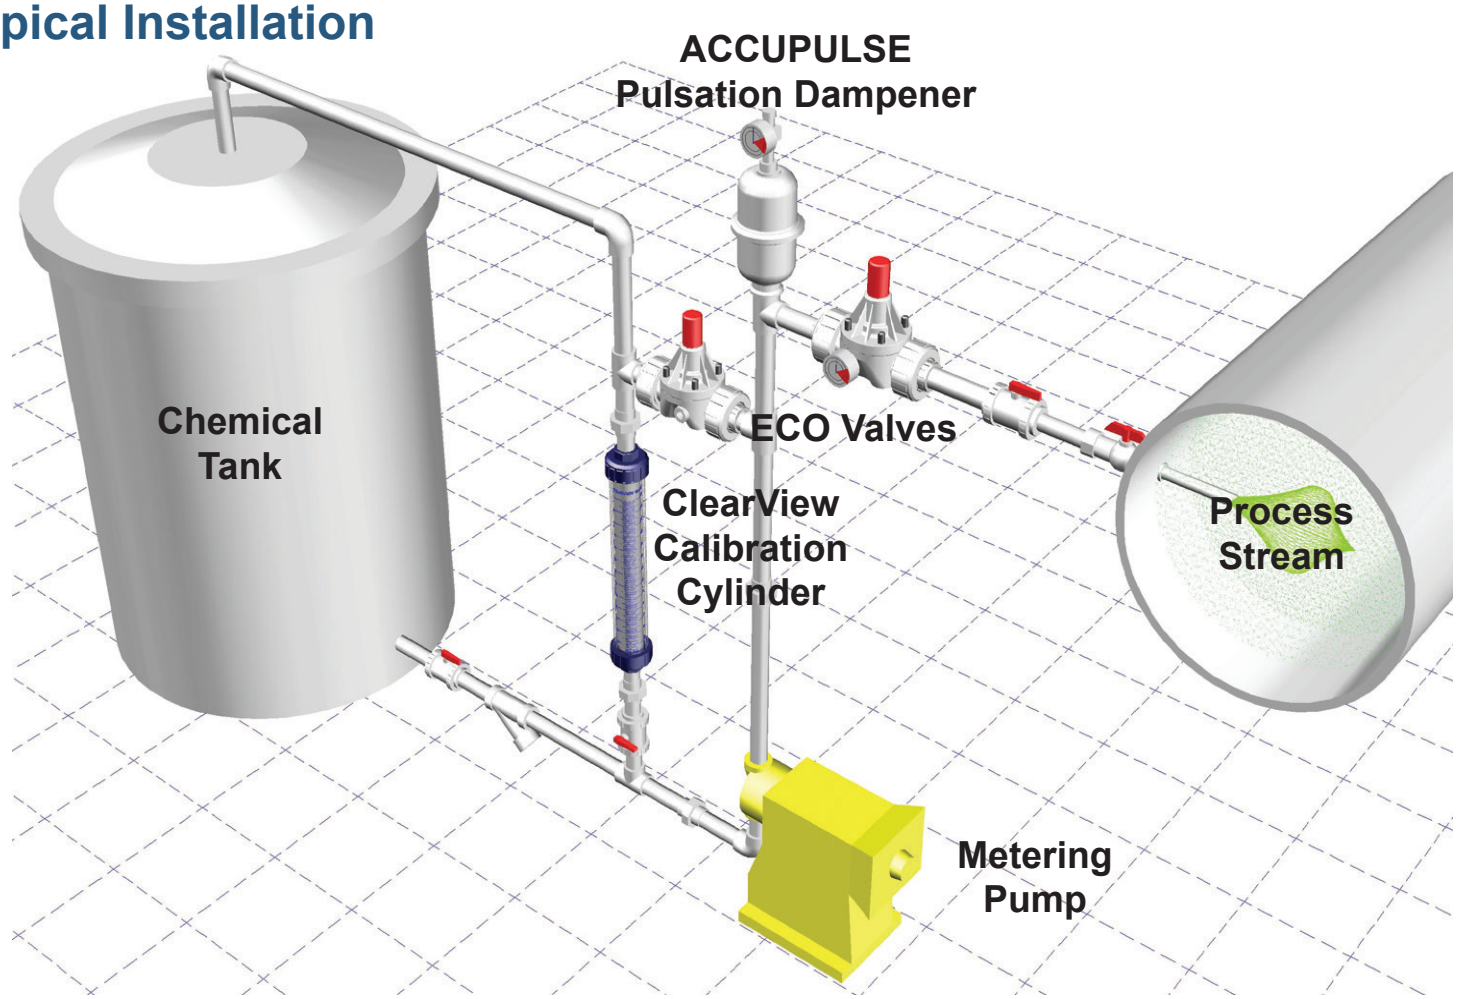

Other available products at www.ecovalve.ca

ECO Valve Back Pressure / Pressure Relief Valves

- available in PVC, CPVC, PVDF, polypropylene and 316 S/S
- long life single sealing diaphragm (laminated PTFE, Viton, EPDM or PVC)
- field adjustable pressure setting 7 - 150 PSIG (48 - 1034 kPa)
- CPVC bonnet for higher temperature and chemical resistance

CS Corporation Stops

- sizes available 1/2" (DN 15) to 2" (DN50)
- available in brass, PVC, CPVC, PVDF, 316 S/S, Alloy 20 and Hastelloy
- threaded, socket or flanged connections
- hose assemblies with isolation and external check valves
- extensive variety of designs, materials and sizes
- custom sizes and designs available

Distributed by:

Rometec srl
Via Alessandro Minuziano, 87 - 89
00128 - Roma
Tel 06-5061635 Fax 065061542
P.Iva 0412062100
www.rometec.it

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it