



Series
AT2
2000


ATEX Approved Series 2000 Magnehelic® Differential Pressure Gage

Magnehelic® Gage in Flame-Proof ATEX Enclosure



PRESSURE

Hazardous Area

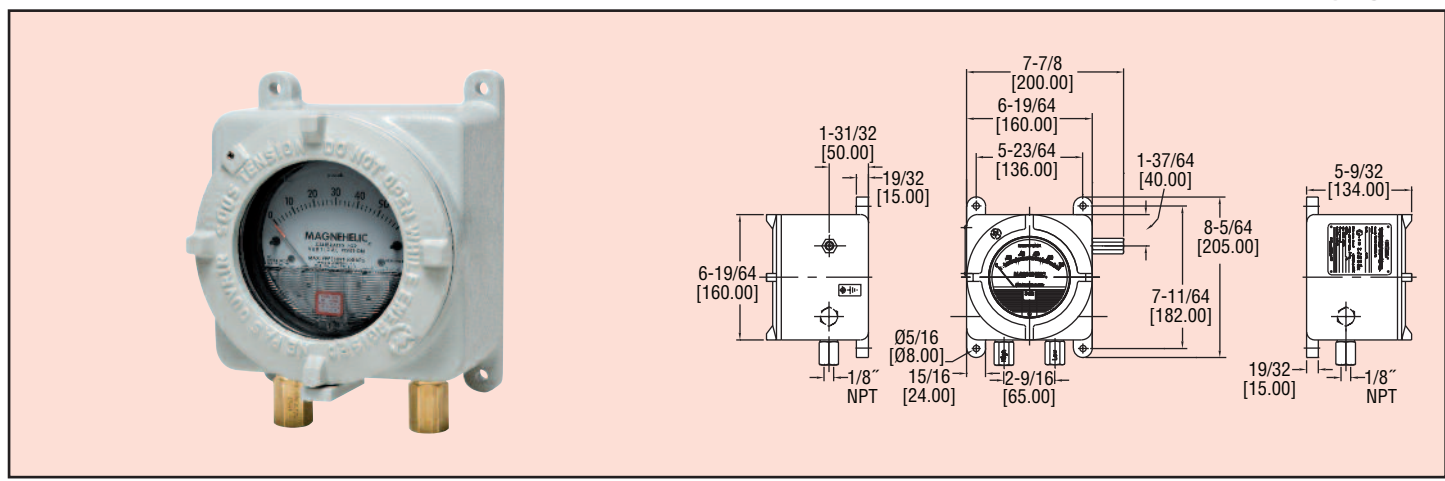

The popular **Magnehelic® Differential Pressure Gage** is now available in a flame-proof ATEX enclosure with the new ATEX approved **AT22000 Series**. This gage can indicate positive, negative or differential pressures and is accurate within 2%. The Magnehelic® gage is the industry standard to measure fan and blower pressures, filter resistance, air velocity, furnace draft, pressure drop across orifice plates, liquid levels with bubbler systems and pressures in fluid amplifier or fluidic systems. Optional gage construction is available for use to either 35 psig (2.42 bar) or 80 psig (5.51 bar). Flame-proof ATEX enclosures are available in aluminum and include a glass window for viewing process pressures status on gage face.

Important notes for installation:

- Cables must be fitted through 1/2" NPT cable gland or ATEX conduit (not supplied with instrument).
- Make sure after cabling to close tight cover and cable gland, in order to keep IP66 rating (IP65 with option OPV, overpressure relief valve).
- Open cover only after de-energizing instrument.
- **Attention:** Check local safety rules and warnings on unit and manual for a correct use of the instrument in hazardous area.

SPECIFICATIONS

- Service:** Air and non-combustible, compatible gases.
- Wetted Materials:** Consult factory.
- Magnehelic® Housing:** Die cast aluminum case & bezel with acrylic cover; Exterior finish is coated gray to withstand 168 hour salt spray corrosion test.
- Accuracy:** ±2% of FS (±3% on -0, -100 Pa, -125 Pa, -10 mm and ±4% on -00, -60 Pa, -6 mm ranges), throughout range at 70°F (21.1°C).
- Pressure Limits:** -20 in Hg to 15 psig (-0.677 bar to 1.034 bar); MP option; 35 psig (2.41 bar), HP option; 80 psig (5.52 bar).
- Overpressure:** Relief plug opens at approximately 25 psig (1.72 bar), standard gages only. See overpressure protection note on Magnehelic® Gage catalog page.
- Temperature Limits:** 20 to 140°F (-6.67 to 60°C); Low temperature option: -20°F (-28.8°C); Case: -58 to 140°F (-50 to 60°C) (**Note:** Product temperature limits are less than case limits).
- Mounting Orientation:** Diaphragm in vertical position.
- Enclosure Rating:** IP66. IP65 with option OPV, overpressure relief valve.
- Housing material:** Aluminum.
- Finishing:** Texture epoxy coat RAL7038.
- Pressure Connections:** 1/8" NPT female brass (SS optional). In presence of acetylene it is necessary to use SS.
- Weight:** 8.6 lb (3.9 kg).
- ATEX Approved Product from Comhas with ECN:** NEMKO 10ATEX1096.
- Agency Approvals:** CE 0470 II2 GD Ex d IIC Gb T6; -50°C ≤ Ta ≤ +60°C Ex tb IIIC Db T 85°C.

Range Chart

Model	Range in w.c.
2000-00N	.05 to 0 to .2
2000-00	0 to .25
2000-0	0 to .50
2001	0 to 1.0
2002	0 to 2.0
2003	0 to 3.0
2004	0 to 4.0
2005	0 to 5.0
2006	0 to 6.0
2008	0 to 8.0
2010	0 to 10
2012	0 to 12
2015	0 to 15
2020	0 to 20
2025	0 to 25
2030	0 to 30
2040	0 to 40
2050	0 to 50
2060	0 to 60
2080	0 to 80
2100	0 to 100
2120	0 to 120
2150	0 to 150
2160	0 to 160

Series	AT22xxx-xx								
Options									
		-X							Standard from -20 in Hg to 15 psig static pressure
		-MP							Medium pressure-max. static 35 psig
		-HP							High pressure-max. static 80 psig
			X						Standard temperature limits -6.67 to 60°C
			LT						Low temperature limit to -28.8°C
Housing Material				-A					Aluminum
Housing Options					O				Glass cover
					1				1/8" NPT female brass ports
					2				1/8" NPT female SS ports
						X			Standard without overpressure relief valve
						OPV			Overpressure relief valve
									Material same as ports
							T2		SS information label