

PRESSURE


Differential Pressure Switches



Series 1800

Low Differential Pressure Switches for General Industrial Service

Set Points from 0.07 in to 85 in w.c. Repetitive Accuracy within 2%

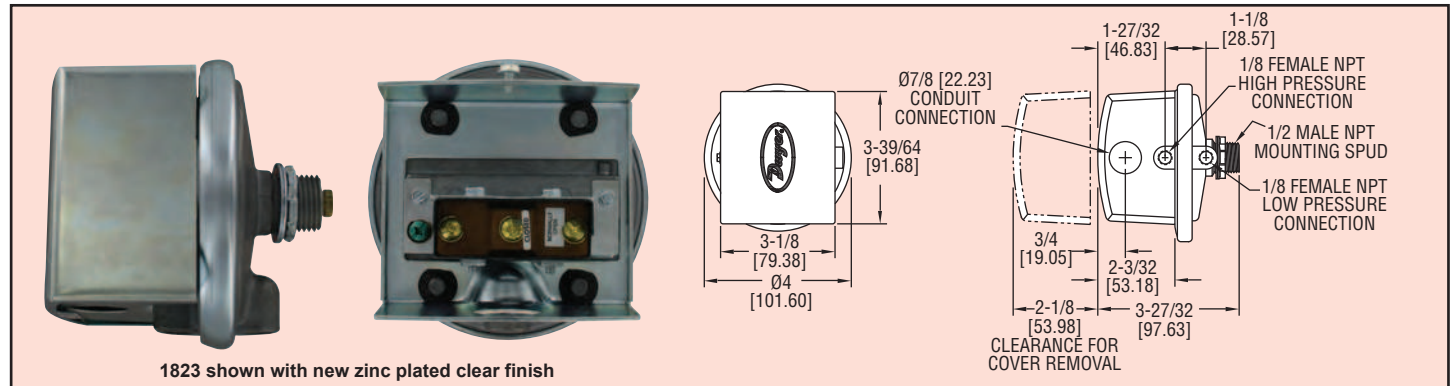

Essential for industrial environments, the Series 1800 combines small size and low price with 2% repeatability for enough accuracy for all but the most demanding applications. Set point adjustment inside the mounting stud permits mounting switch on one side of a wall or panel with adjustment easily accessible on the opposite side. UL and CSA listed, FM approved.

CAUTION: For use only with air or compatible gases.

Series 1823 Switches
Operating Ranges & Deadbands

Model	Operating Range, in w.c.	Approximate Deadband	
		At Min. Set Point	At Max. Set Point
1823-00	0.07 to 0.22	0.05	0.05
1823-0	0.15 to 0.5	0.06	0.06
1823-1	0.3 to 1.0	0.08	0.08
1823-2	0.5 to 2.0	0.10	0.12
1823-5	1.5 to 5.0	0.14	0.28
1823-10	2.0 to 10	0.18	0.45
1823-20	3 to 22	0.35	0.70
1823-40	5 to 44	0.56	1.10
1823-80	9 to 85	1.30	3.0

OPTION

MIL Environmental Construction — Unlisted Model 1820 can be furnished with a special sealed snap switch for protection against high humidity, fungus and/or military applications. Similar to Model 1823 except deadband is slightly greater and some lower setpoints may not be possible. To order, add suffix -MIL. Example: 1820-2-MIL.

ACCESSORIES


- A-389 Mounting Bracket** is 16 ga. steel, zinc plated and dichromate dipped for corrosion resistance. Provides rugged, permanent mounting and speeds installation
- A-489**, 4" Straight Static Pressure Tip with Flange
- A-491**, 6" Straight Static Pressure Tip with Flange
- A-493**, 8" Straight Static Pressure Tip with Flange
- A-302F-A**, 303 SS Static Pressure Tip with mounting flange. For 3/16" ID rubber or plastic tubing. 4" insertion depth. Includes mounting screws
- A-302F-B**, 303 SS Static Pressure Tip with mounting flange. For 3/16" rubber or plastic tubing. 6" insertion depth. Includes mounting screws
- A-302F-C**, 303 SS Static Pressure Tip with mounting flange. For 3/16" rubber or plastic tubing. 8" insertion depth. Includes mounting screws

See page 587 for process tubing options.

SPECIFICATIONS


- Service:** Air and non-combustible, compatible gases.
- Wetted Materials:** Consult factory.
- Temperature Limits:** -30 to 180°F (-34 to 82.2°C). 1823-00, -20 to 180°F (-28.9 to 82.2°C).
- Pressure Limits:** 10 psig (68.95 kPa) continuous, 25 psig (172.4 kPa) surge.
- Switch Type:** Single-pole double-throw (SPDT).
- Repeatability:** ±2%.
- Electrical Rating:** 15 A @ 120-480 VAC, 60 Hz. Resistive 1/8 HP @ 125 VAC, 1/4 HP @ 250 VAC, 60 Hz. Derate to 10 A for operation at high cycle rates.

- Electrical Connections:** 3 screw type, common, normally open and normally closed.
- Process Connections:** 1/8" female NPT.
- Mounting Orientation:** Diaphragm in vertical position. Consult factory for other position orientations.
- Set Point Adjustment:** Screw type inside mounting spud.
- Weight:** 1 lb, 5 oz (595 g).
- Agency Approvals:** CE, CSA, FM, UL. Optional-EXPL explosion-proof enclosure does not possess any agency approvals.

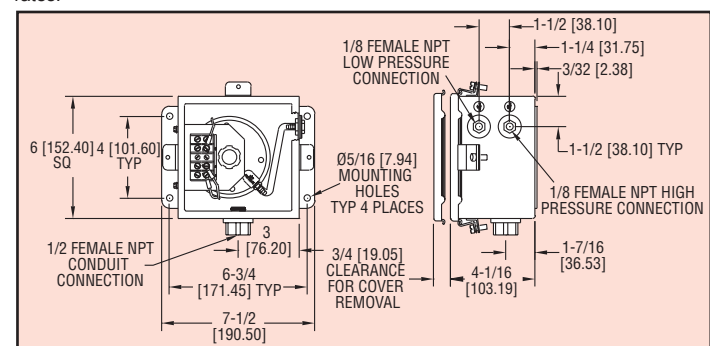

Weatherproof Housing:

16 ga. steel enclosure with gasketed cover (NEMA 4, IP66) for wet or oily conditions. Withstands 200 hour salt spray test. Wt. 5-1/2 lbs. (2.5 kg). Switch must be factory installed. Change 1823 base number to 1824 and add -WP suffix. Example: 1824-1-WP

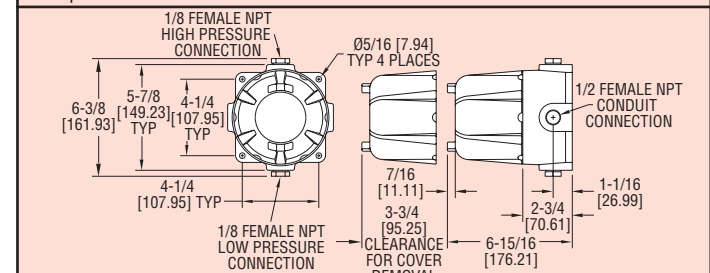

Explosion-Proof Housing:

Cast iron base with aluminum cover. Rated Class I, Div. 1 & 2, Group D; Class II, Div. 1 & 2, Groups E, F, G; Class III and NEMA 7 CD, 9 EFG. Wt. 7-1/2 lbs (3.4kg). Switch must be factory installed. Change base number to 1824 and add -EXPL suffix. Example: 1824-1-EXPL



ULTERIORI OPZIONI

- AT targhetta in alluminio
- B guarnizioni in BUNA-N
- BGAP microswitch B-GAP
- EXPL custodia explosion-proof
- GOLD switch con contatti dorati
- LC senza il conduit
- MIL switch MIL
- MR reset manuale
- PRESET tarato in fabbrica
- SF senza silicone
- ST targhetta in acciaio inox
- WP custodia weatherproof