




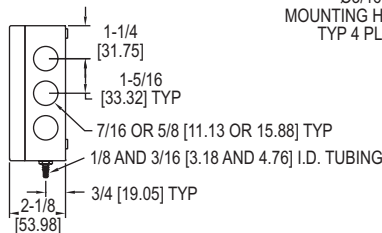

SERIES 616W

DIFFERENTIAL PRESSURE TRANSMITTER

NEMA 4X Enclosure, 0.25% FS Accuracy



Positive, negative and differential pressures can be measured within a full span accuracy of ± 0.25 with the **SERIES 616W** Differential Pressure Transmitter. Units are enclosed in a polycarbonate case, rated NEMA 4X (IP66) and operate by sensing the pressure of air and compatible gases then sending a standard 4-20 mA output signal. Design enables operation in 2-wire current loops. A wide range of models are available factory calibrated to specific ranges. The span and zero controls are for use when checking calibration. They are not intended for re-ranging to a significantly different span. The LCD display allows local indication of pressure.

FEATURES/BENEFITS

- NEMA 4X rated enclosure provides protection in harsh environments permitting outdoor monitoring or in areas where dust and particulate matter exists
- Easy to read LCD display provides immediate local alerts allowing corrective action to be taken quicker to eliminate the problem from becoming widespread
- Zero and span controls provides easy calibration checks and shorter installation time to get device running and monitoring

APPLICATIONS

- Dust collection
- Outdoor HVAC
- Roof-top equipment

MODEL CHART		
Model	Range	Max. Pressure
616W-2-LCD	0 to 6 in w.c.	10 psig
616W-3-LCD	0 to 10 in w.c.	10 psig
616W-4-LCD	0 to 20 in w.c.	20 psig
616W-5-LCD	0 to 40 in w.c.	20 psig
616W-6-LCD	0 to 100 in w.c.	15 psig
616W-7-LCD	0 to 200 in w.c.	45 psig
616W-20B-LCD	0 to ± 10 in w.c.	10 psig
616W-3M-LCD	0 to 2.5 kPa	68.9 kPa

Note: Units with "M" in the model number are metric units.

Altre scale

- 6B -/+3" w.c.
- 10B -/+5" w.c.
- 2M 0-15kPa
- 4M 0-5kPa
- 5M 0-10kPa

SPECIFICATIONS

Service: Air and non-combustible, compatible gases.
Wetted Materials: Consult factory.
Accuracy: $\pm 0.25\%$ FS @ 77°F (25°C), display accuracy $\pm 0.5\%$.
Stability: $\pm 1\%$ FS/yr.
Temperature Limits: 14 to 185°F (-10 to 85°C).
Pressure Limits: See chart.
Power Requirements: 10 to 35 VDC (2-wire), 17 to 36 VDC, or isolated 21.6 to 33 VAC (3-wire).
Output Signal: 4 to 20 mA (2-wire), 0 to 5 VDC, or 0 to 10 VDC (3-wire).
Zero and Span Adjustments: Push buttons.

Loop Resistance: Current output: 0 to 1250 Ω max; Voltage output: Load resistance 1 k Ω (min).
Current Consumption: 40 mA (max).
Electrical Connections: 3-wire removable European style terminal block for 16 to 26 AWG.
Process Connections: Barbed, dual size to fit 1/8" and 3/16" (3.12 and 4.76 mm) ID rubber or vinyl tubing.
Enclosure Rating: NEMA 4X (IP66).
Mounting Orientation: Any orientation.
Weight: Without LCD 8.8 oz. (249 g); with LCD 9.6 oz (272 g).
Agency Approvals: CE.

OPTIONS

To order add suffix:	Description
-NIST	NIST traceable calibration certificate
Example: 616W-3-LCD-NIST	

- AT Targhetta in alluminio 2 righe x 9 caratteri
- COC Certificato di calibrazione
- FC Certificato di calibrazione Dwyer

Process Tubing Options: See page 499 (Gage Tubing Accessories)