


DUAL-ACTION EXPLOSION-PROOF PRESSURE SWITCH

Explosion-proof and Weatherproof Enclosure

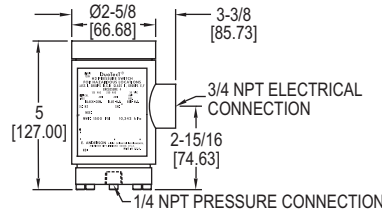

Explosion-Proof, UL & CSA Listed for Class I, Groups B, C & D and Class II, Groups E, F & G. The **Series H2 Dual-Action Explosion-Proof Pressure Switch** is designed for sequencing two different actions as pressure of a liquid or gas increases or decreases. The design consists of two concentric pistons operated by a single diaphragm with one pressure chamber. Each piston actuates a separate switch independent of the other. The switches may be adjusted to operate together, at opposite ends of the range or at two intermediate set points. The threaded top is removed to field adjust or service switches without disturbing electrical or pressure connections. The Duotect® switch is explosion-proof and weatherproof. It can be mounted in any position and is not affected by vibration.

FEATURES/BENEFITS

- Explosion-proof and weather-proof housing provides device protection for outdoor use or harsh environment operation
- UL listed, CSA approved to support rigorous process applications and regulations
- Independent piston action design for either gas or liquid allows switches to active together or independently based on settings
- Mounting in any position and not affected by vibration provides reliable switching for equipment

APPLICATIONS

- Mechanical HVAC or process equipment
- Chemical, petroleum, food and drug processing industries
- Process and Industrial applications

SPECIFICATIONS

Wetted Materials: 316 SS chamber with FEP diaphragm and Buna-N O-ring standard. Fluoroelastomer or EPDM O-ring optional.	Switch Type: Two SPDT snap switches.
Temperature Limit: 275°F (135°C). CSA approved: -20 to 90°C (-4 to 184°F).	Electrical Rating: 5 A @ 125/250 VAC. 5 A res., 3 A ind. @ 30 VDC. Gold contacts optional.
Pressure Limit: 1500 psig (103 bar).	Electrical Connections: 18 AWG, 18" (460 mm) long.
Enclosure Rating: UL listed explosion-proof, Class I, Groups B, C, and D. Class II Groups E, F, and G. Meets NEMA 4X (IP66). CSA optional. Class I, Groups B, C & D. Class II, Groups E, F, & G -20°C ≤ Tamb ≤ 75°C T6 [optional -20°C ≤ Tamb ≤ 40°C T5] Type 4.	Conduit Connection: 3/4" female NPT.
	Process Connection: 1/4" female NPT.
	Mounting Orientation: Any position.
	Set Point Adjustment: Internal nut.
	Weight: 2 lb (.9 kg).
	Deadband: Approximately 10% of range.
	Agency Approvals: CSA, UL.

MODEL CHART

Model	Low Range psig (bar)	High Range psig (bar)
H2S-1	3 to 40 (0.21 to 2.76)	5 to 75 (0.35 to 5.17)
H2S-2	25 to 250 (1.72 to 17.2)	30 to 400 (2.07 to 27.6)
H2S-3	100 to 1000 (6.89 to 68.9)	150 to 1500 (10.3 to 103)

Ulteriori Campi

- 1S singolo 3-75psi (0.2-5.17 bar)
- 2S singolo 25-400psi (1.72-27.6 bar)
- 3S singolo 100-1500psi (6.89-103 bar)

Ulteriori opzioni

- CSA cert. CSA
- MV switch contatti dorati
- PRESET tarato in fabbrica
- EPDM guarnizioni in EPDM