




Series
SCT

Current Transformer

Optional Auxillary, Relay Output, Split Core

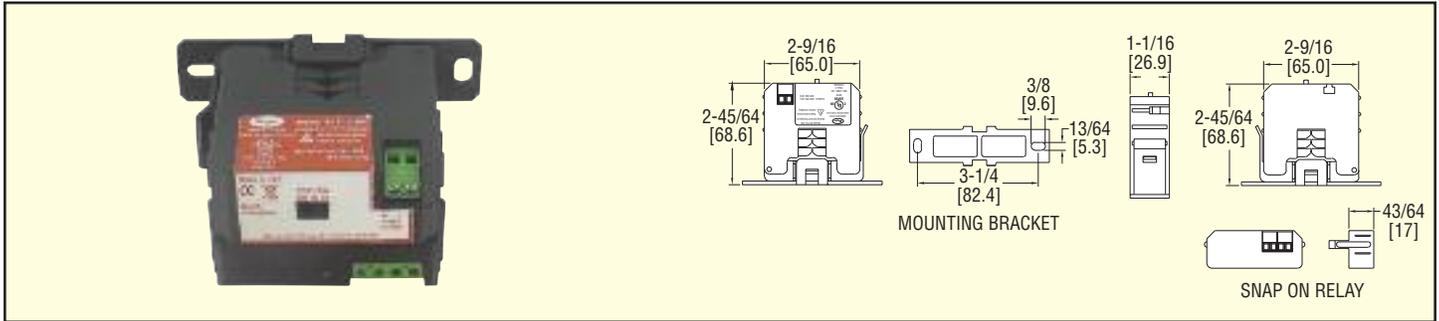

The Series SCT Current Transformers continuously measure the current consumption of pumps, fans, boilers, solar panels and chillers for use in energy monitoring. Current or voltage outputs can be scaled using a slider switch to select between three factory set ranges. Split core configuration allows the current transformer to be installed on new and existing installations. Snap-on mounting bracket allows for quick installation of replacement transformers. An optional 10 A command relay can snap onto the current switch, which eliminates the need to mount an additional relay.

SPECIFICATIONS

- Amperage Range:** 30/60/120 A or 20/100/150 A (depending on model).
- Continuous Operating Current:** 120 A or 150 A (depending on model).
- Output:** 4 to 20 mA, 0 to 5 VDC, 0 to 10 VDC (depending on model).
Optional relay NO SPST; 10 A @ 260 VAC, 5 A @ 30 VDC.
- Power Requirements:** Self-powered or 24 VDC (depending on model).
- Accuracy:** ±2% from 10 to 100% of selected range.
- Temperature Limits:** 5 to 140°F (-15 to 60°C).
- Humidity Limits:** 0 to 95% non-condensing.
- Response Time:** 2 seconds.
- Isolation Voltage:** 600 VAC RMS.
- Frequency:** 50/60 Hz.
- Enclosure Rating:** UL, V-O flammability rated, type 66 nylon.
- Agency Approvals:** CE, RoHS, UL.

Model	Range	Output	Power Requirements	Max. Continuous Operating Current
SCT10-100	30/60/120 A	4 to 20 mA	24 VDC	120 A
SCT10-102	30/60/120 A	0 to 5 VDC	Self-powered	120 A
SCT20-103	20/100/150 A	0 to 10 VDC	Self-powered	150 A

ACCESSORIES

- SCT-RLY-12, 12 VAC Trigger Voltage Relay Module
- SCT-RLY-24, 24 VAC Trigger Voltage Relay Module