


# SENTRY COBRA HTHV SAMPLER

## Low Emission Samplers



### MANUAL SAMPLING

The Sentry® Cobra HTHV closed loop sampler is specifically designed to provide a safe sampling method for high-temperature high-viscosity applications such as hot oil and slurries. Enclosing the system and allowing the operator to view the process through a viewing window provides extra safety. Designed to the highest quality standards and to the most precise specifications, the Cobra HTHV sampler is ideally suited to use in the petrochemical, refinery, chemical and specialty gas industries.

#### MODELS

Cobra HTHV

#### BENEFITS

The Cobra HTHV sampler is designed to address the problems that temperature can create when trying to secure accurate representative samples. By steam jacketing the sample loop, the problems of plugging and cold spots are effectively prevented, while the inclusion of a multi-turn valve with a hardened seat means the operator can throttle the sample flow adequately to secure the sample safely.


#### FEATURES

- Safe sampling for high temperature high viscosity applications
- Flow-through HTHV valve allows constant representative process flow for immediate sampling, and prevents process from stagnating and clogging
- Available steam jacketing of entire sample to prevent plugging or cold spots
- Multi-turn valve with hardened seat allows throttling of sample flow
- Step-by-step instruction tag and valve labels for simple operation
- Replaceable steam-jacketed stinger
- Enclosure with viewing window protects operator during sampling operation
- Big bore HTHV valve available with 1/4-inch orifice to handle larger particles and higher viscosity flows
- Double-block valve available when secondary isolation is necessary
- Designed for the following applications:
  - Hot oil
  - Residual oil
  - Vacuum tower bottoms
  - Slurries
  - Asphaltenes



Sample. Monitor. Measure.



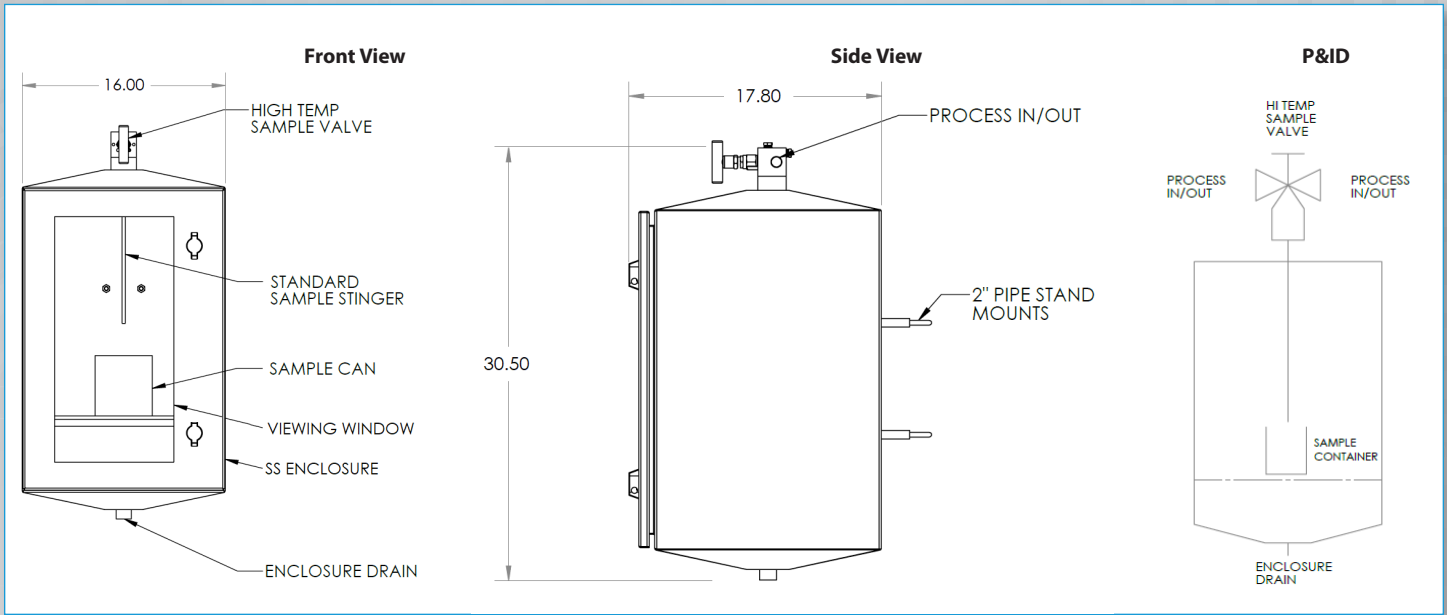

## SPECIFICATIONS

<b>wetted materials</b>	body: 316/316L stainless steel (other materials available upon request) stem tip: ceramic (other materials available upon request)
<b>pressure rating</b>	3000 psig max at 100°F (final rating dependent upon connection selection)
<b>process temperature</b>	750°F max
<b>sampler interface</b>	1/2 in threaded connection 3/4 in spool piece with 150# flange ["wide range of connections available, depending on valve selection"]
<b>enclosure</b>	stainless steel enclosure with viewing window and expanded metal
<b>container size</b>	1 gallon (standard)
<b>options</b>	pipe stand (2 in) process isolation valves (inlet and/or return) steam-jacketed stinger secondary isolation N <sub>2</sub> or steam purge

[sentry-equip.com](http://sentry-equip.com)

966 Blue Ribbon Circle North, Oconomowoc, WI 53066 U.S.A. | +1-262-567-7256 | [sales@sentry-equip.com](mailto:sales@sentry-equip.com)

© 2018 Sentry Equipment Corp. All rights reserved. All product and company names are property of their respective owners. It is solely the responsibility of end users, through their own testing and analysis, to select products and materials suitable for their specific application requirements, ensure they are properly installed, safely applied and properly maintained, and to limit their use to their intended purpose. Improper selection, installation or use may result in personal injury or property damage.



COMPANY WITH  
QUALITY SYSTEM