



SENTRY J-TUBE FLOATING OIL SKIMMER

Sentry SmartSkim

OIL SEPARATORS

Extend the life of your industrial fluids and equipment efficiently and effectively with a floating oil skimmer.

Sentry's easy-to-maintain SmartSkim J-Tube Floating oil skimmer comes in various sizes and has a simple mounting bracket, allowing your team to select the best location for the device. The operator-friendly device produces the same trusted SmartSkim performance with no additional hoses, belts, disks, or drums causing excess repairs or clogging.


Our floating tube skimmer works best with air-operated diaphragm (AOD) or progressive cavity pumps. But regardless of the transfer pump, SmartSkim's floating oil skimmer is designed for continuous operation with minimal downtime, regardless of coolant or cleaner. An included stopper also ensures that there is minimal leakage during the performance.

BENEFITS

- Designed for easy installation and minimal maintenance
- The system allows for continuous operation
- Available in 3.5", 7", and 17" sizes to accommodate various applications
- It can be used with virtually any coolant or cleaner

FEATURES


- No belts, disks, drums, or hoses – minimizing the chance of clogging or breakdown
- Stainless steel design maximizes equipment longevity
- Easy set-up and maintenance design with no ballasts

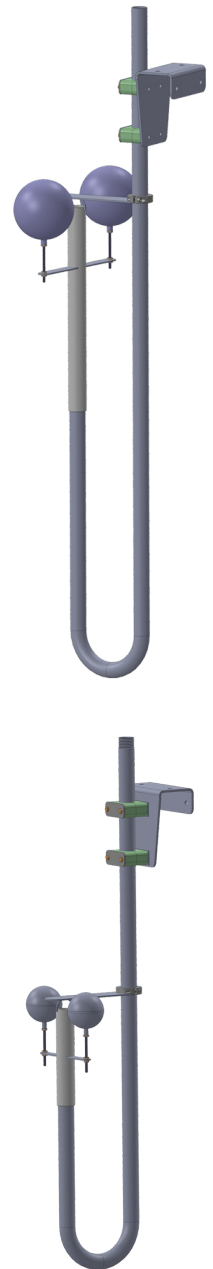


Sample. Monitor. Measure.




3.5" J-Tube Skimmer

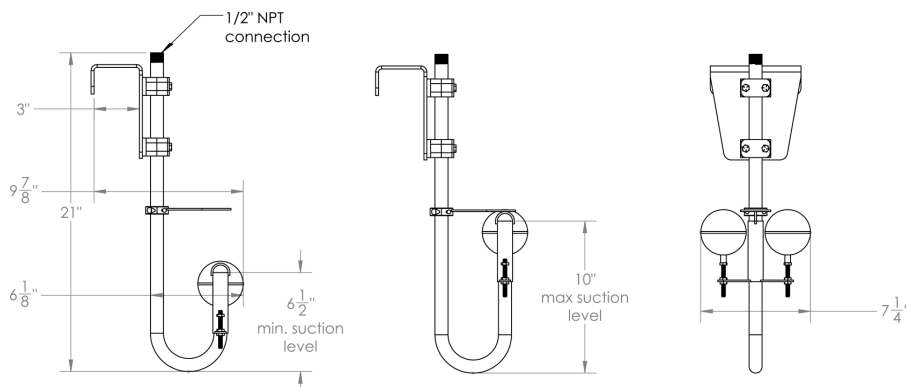

7" J-Tube Skimmer

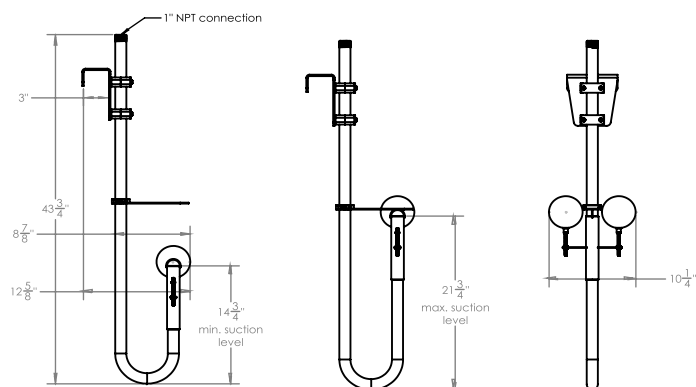

17" J-Tube Skimmer

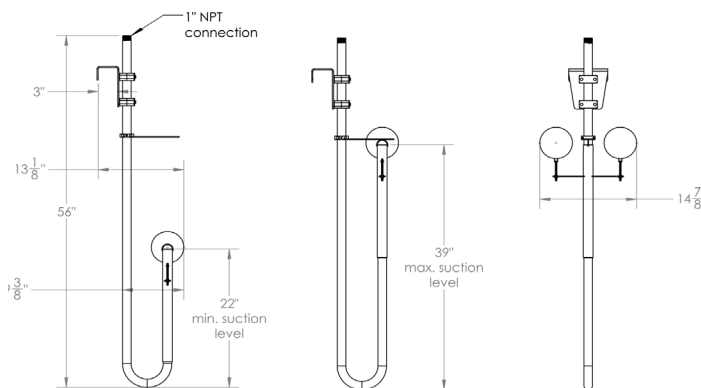

SPECIFICATIONS

Wetted Materials	304 SS
Materials of Construction	304 SS
Process Temperature	Up to 2300°F

sentry-equip.com

966 Blue Ribbon Circle North, Oconomowoc, WI 53066 U.S.A. | +1-262-567-7256 | sales@sentry-equip.com

© 2015 Sentry Equipment Corp. All rights reserved. All product and company names are property of their respective owners. It is solely the responsibility of end users, through their own testing and analysis, to select products and materials suitable for their specific application requirements, ensure they are properly installed, safely applied and properly maintained, and to limit their use to their intended purpose. Improper selection, installation or use may result in personal injury or property damage.



COMPANY WITH
QUALITY SYSTEM