

Chemically Inert Moulded Body Solenoid Valve

PKV Series

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

TAKASAGO ELECTRIC, INC.



2-way hose barb type

3-way threaded type

(New line-up)

Moulded 3-way PKV series valve now available

Features

φ 4-6mm is its orifice diameter, which enables it to be used in a wide-range of fluid control applications for various kinds of analysis, IVD diagnostics, medical, and other life science instruments, etc., which necessitate such large orifice. An elastomer is employed for the seal material, reducing damage to the valve seat by foreign matters in the fluid and the associated leak trouble.

Specifications

Model Number	PKV-2(21) x -B x x x	PKV-02(021) x -D x x x	PKV-3(31) x -B x x x	PKV-3(31) x -D x x x
Type	2-way N.C.	2-way N.O.	3-way	
Orifice Diameter	4 mm equiv.	6 mm equiv.	4 mm equiv.	6 mm equiv.
Port Connection	Rc1/8, Rc1/4, 1/8-27NPT, 1/4-18NPT, (※) hose barb <※ only available for 2-way>			
Operating Pressure	IN: -90 ~ 200 kPa	IN: -50 ~ 200 kPa	COM: -90 ~ 100 kPa	COM: -50 ~ 100 kPa
Range	OUT: 0 ~ 50 kPa	OUT: 0 ~ 50 kPa	N.C., N.O.: 0 ~ 50 kPa	N.C., N.O.: 0 ~ 50 kPa
Fluid Temp. Range	0 ~ 60 °C (5 ~ 60 °C in the case the seal material is perfluoroelastomer)			
Ambient Temp. Range	0 ~ 60 °C		0 ~ 40 °C	
Rated Voltage	12VDC, 24VDC, 90VDC, 100VAC (50/60Hz, with a rectifier)			
Power Consumption	6 W		10 W	
Duty Cycle	Continuous			
Insulation Class	Class B			
Dielectric Strength	1500 VAC for 60 s			
Diaphragm Material	PTFE			
Seal Material	EPDM, FPM, Perfluoroelastomer			
Body Material	PPS, PEEK			

Note: Specifications etc. may be changed at any time without notice.

TAKASAGO ELECTRIC, INC.

66 KAKITSUBATA, NARUMI-CHO, MIDORI-KU, NAGOYA, 458-8522, JAPAN
Tel +81-52-891-2301 Fax+81-52-891-7386

E-mail: info@takasago-elec.co.jp

URL: <http://www.takasago-fluidics.com>

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

Model Number

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

PKV - X X - X X X X

Type	
02	2-way N.O.
021	2-way N.O. (*)
2	2-way N.C.
21	2-way N.C. (*)
3	3-way
31	3-way (*)

Orifice

B	φ4mm
D	φ6mm

Body Material

R	PPS
K	PEEK

Port Connection

1/8	Rc1/8
1/4	Rc1/4
1/8N	1/8-27NPT
1/4N	1/4-18NPT
N2	Hose barb (only available for 2-way)

Installation Method

3-way	-	Frame and Underside M4 screws
	B	with mounting base
2-way	-	Frame M4 screws
	A	Underside M4 screws
	B	with mounting base

Seal Material




E	EPDM
F	FPM
G	Perfluoroelastomer

*Available only when seal material is "G".

Dimensions

PKV-2K-B1/8GB

(2-way N.C., Rc1/8, with mounting base) (2-way N.C., Hose barb, Underside M4 screws) (3-way, Rc1/8, Frame and, Underside M4 screws)

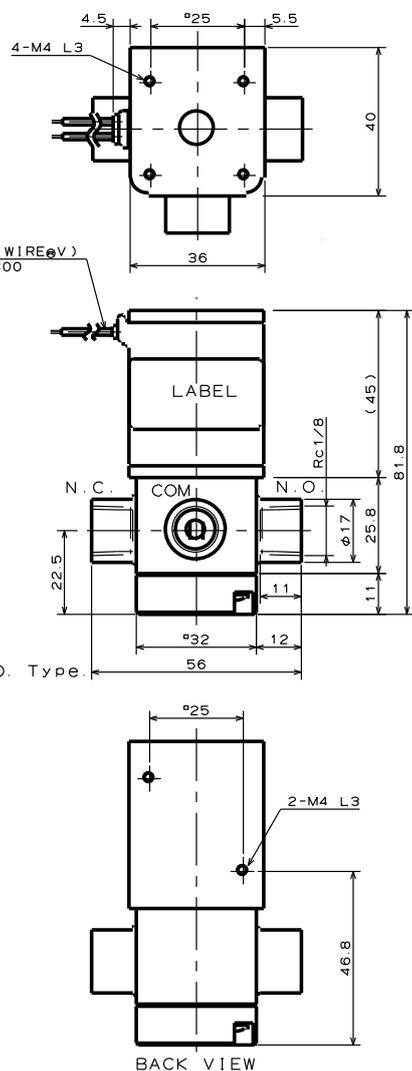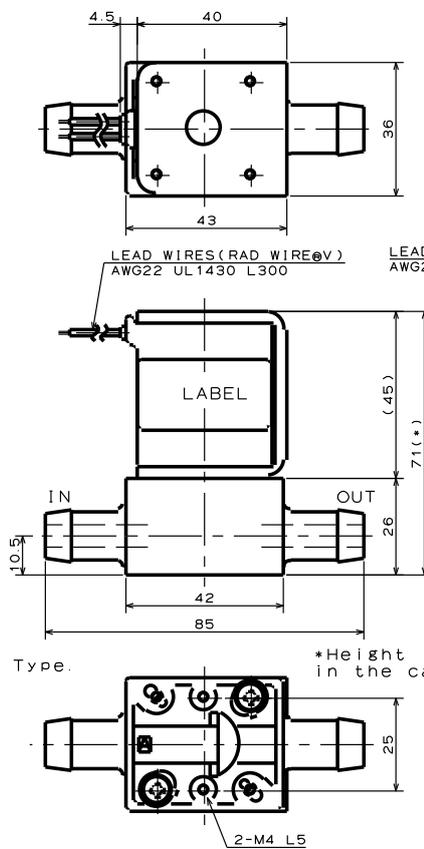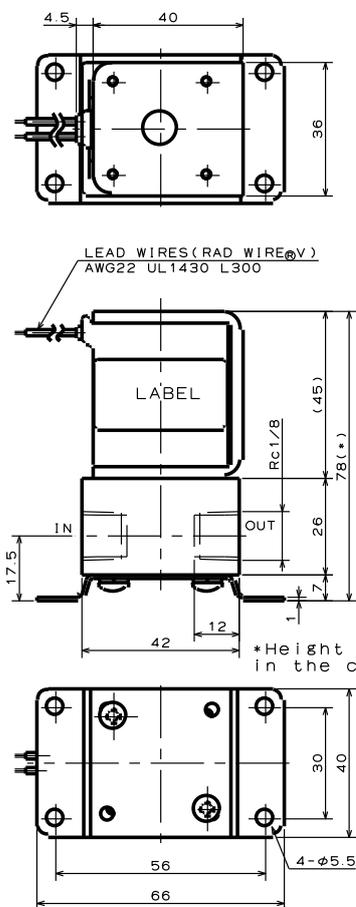

*Underside M4 screws are the same as the ones of the PKV-2K-DN2GA.