




Series
V7

FLOTECT®
Magnetic Linkage

Vane Operated Flow Switch

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it

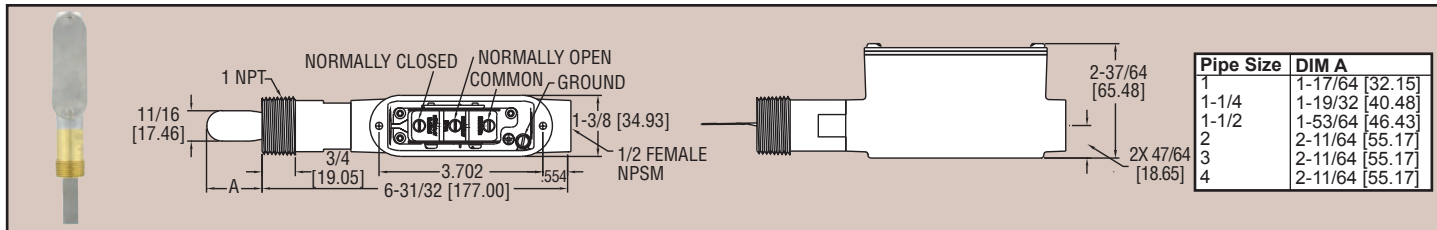

The Series V7 Flotect® Flow Switch is an inexpensive switch for use with compatible liquids to start or stop electronic operated equipment when flow or no-flow conditions occur. Magnetic operation is simple and dependable with no mechanical linkages or seals to wear or leak. Lower body is machined solid metal bar stock assuring no leak points, no matter how long the unit is in service. Design is standard weatherproof, meeting NEMA 4X (IP66), for application versatility. Robust vane design is rigid and field trimmable for set point adjustment.

Approximate Actuation-Deactuation Flow Rates for Cold Water GPM (LPM)

Pipe Size	Actuate	Deactuate
1"	7.5 (28.4)	6.8 (25.7)
1-1/4"	8.1 (30.8)	7.6 (28.9)
1-1/2"	11.7 (44.1)	10.9 (41.3)

2"	19.0 (72.2)	18.1 (68.0)
3"	31.6 (120)	29.6 (112)
4"	58.0 (218)	52.0 (197)

Ulteriori opzioni:

- RV paletta rinforzata
- ST targhetta inox (max 3 linee)

SPECIFICATIONS

Service: Liquids compatible with wetted materials that are non-coating and non-crystallizing.

Wetted Materials: Vane: 301 SS; Process connection: Brass or 316 SS; Magnet: Ceramic; Other: 301, 302 SS.

Upper Body Material: Die cast aluminum.

Temperature Limits: -40 to 250°F (-40 to 121°C).

Pressure Limits: 250 psi (17.2 bar).

Enclosure Rating: Weatherproof, meets NEMA 4X (IP66)

Electrical Rating: 10A @ 125, 250, 480 VAC; 1/8 hp @ 125 VAC, 1/4 hp @ 250 VAC.

Electrical Connections: 3 screw type, common, normally open and normally closed.

Conduit Connection: 1/2" NPSM.

Process Connection: 1" male NPT. Contact factory for optional tees.

Pipe Size: 1" to 4".

Mounting Orientation: Horizontal or vertical (actuation flow rates are based on horizontal pipe runs in the vertical position). Will not work in vertical pipe.

Set Point Adjustment: Vane is trimmable, see set point chart.

Weight: 1 lb 2 oz (500 g).

Agency Approvals: CE, UL.

Model	Body Material
V7-WBS-30N	Brass
V7-WSS-30N	316 SS

Contact the factory for different actuation-deactuation rates.

Rometec srl - www.rometec.it - Rometec srl - www.rometec.it - Rometec srl - www.rometec.it