

# Rapidrop® Flexible Sprinkler Connection

Description

Rapidrop

The unique Rapidrop® system easily positions the sprinkler in the centre of the ceiling tile at the correct height and can be installed in 10 to 15 minutes. The concept is very simple and breathtakingly efficient.

Rapidrop® is a complete unit, a corrugated stainless steel flexible with nipple, reducer, bar and brackets, which are fitted to the ceiling tile support rails to locate and secure the sprinkler in the correct position. As well as considerably reduced installation time, the risk of mess (from the cutting and threading activity associated with the traditional armover method) in the clean area below the suspended ceiling is eliminated, allowing other activities to proceed more efficiently.

### **Pressure Rating**

Max. Service Pressure: LPCB 16 Bar UL 12 Bar

Inlet R1 or R1.1/4 or 1"NPT Outlet A = Rc1/2 or 1/2"NPTB = Rc3/4 or 3/4"NPTC = R1 (External Thread)

**Equivalent Pipe Length** 


### Standard Lengths

UL **LPCB Product** Schedule 40 BS EN 10255 Length Rapidrop®SP-1AS 0.70m 5.5m 5.1m Rapidrop® SP-1A 0.78m 8.2m 6.0m Rapidrop® SP-2AS 1.00m 13.4m 8.5m Rapidrop® SP-2A 1.22m 16.2m 11.0m Rapidrop® SP-3A 1.54m 20.7m 14.2m 1.88m Rapidrop® SP-4A 22.3m 18.2m Rapidrop® SP-5A 2.54m 25.2m Rapidrop® SP-6A 3.22m 32.5m

# (For Wet Pipe Sprinkler Systems)

**UL Listed / LPCB Approved** 



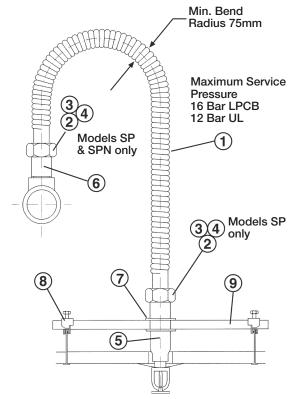

## **Material Specification**

Ref		MODEL SP		MODEL SPN		MODEL SPW		
	No.	Description	Qty	Material	Qty	Material	Qty	Material
	1	Flexible	1	AISI 304	1	AISI 304	1	AISI 304
	2	Nut	2	SS400 Zinc Plated	1	SS400 Zinc Plated	Nil	Not Applicable
	3	Isolation Ring	2	Nylon 66	1	Nylon 66	Nil	Not Applicable
	4	Packing (Seal)	2	NBR	1	NBR	Nil	Not Applicable
	5	Reducer	1	Carbon Steel Zinc Plated	1	ASIM IP304	1	ASIM IP304
	6	Nipple	1	Carbon Steel Zinc Plated	1	Carbon Steel Zinc Plated	1 1	ASIM IP304
	7	Bracket A	1	Mild Steel Zinc Plated	1	Mild Steel Zinc Plated	1	Mild Steel Zinc Plated
	8	Bracket B	2	Mild Steel Zinc Plated	2	Mild Steel Zinc Plated	2	Mild Steel Zinc Plated
	9	Square Bar	1	Mild Steel Zinc Plated	1	Mild Steel Zinc Plated	1	Mild Steel Zinc Plated

#### **Benefits**

Save Time No Cutting

No Welding

 Save Labour No Threading

No Mess - Clean

- Save Money
- No Oil
- Ideal for Retrofit Applications
- No Measuring
- No Grease
- Easy to move for layout changes

Rapidrop Global

Bridge W. rometec fidtlan Rojnspeter New Irk Royd, Rotwin prough, eterwijt Unit Rongdont e Rapidrop Global Limited Registered in England No. 5503278

Tel: +44 (0) 1733 847 510 Fax: +44 (0) 1733 553 958

e-mail: rapidrop@rapidrop.com web: www.rapidrop.com

Ref No. 566a/01 - Rapidrop Model SP Ref No. 566a/03 - Rapidrop Model SPW