

Rometec s.r.l.

Via Alessandro Minuziano, 87-80 00178 Roma

[Rometec srl - www.rometec.it](http://www.rometec.it) - info@rometec.it - [Rometec srl - www.rometec.it](http://www.rometec.it) - info@rometec.it

Sito web: www.rometec.it - email: info@rometec.it

P. IVA 04120621000 - CCIAA RM 736916

Reg. Soc. Tribunale RM 9229/91 - Cap. soc. 46'482,00 €



CARATTERISTICHE

Utilizzo: Fluidi liquidi e gassosi

Precisione: $\pm 5\%$ del f.s.

Pressione max di esercizio: 10 bar


Temperatura max di esercizio: 70 °C

Raccordi in PVC, AISI 304 o AISI 316




ACCESSORI


Proxy induttivo PNP FP/1 o FP/3 per allarme di minima/massima portata oppure entrambe

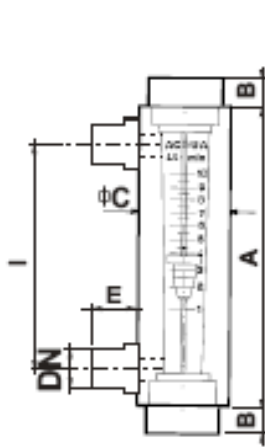

square connections threaded

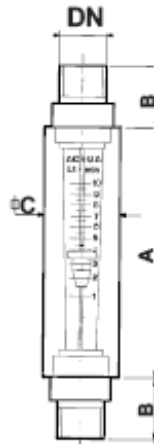

axial connections threaded

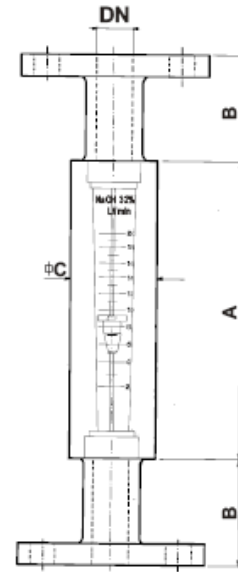

axial connections flanged

Portate standard per acqua 20 °C
Per aria a pressione atmosferica

TIPO	portate standard		attacchi filettati				attacchi flangiati			
	WATER	AIR	threaded connection				flanged connection			
	Lt/h	Nmc/h	DN	A	B	C	DN	A	B	C
PL/1	200	6	1/2"	180	35	40	15	180	60	35
	400	8								
	600	10								
PL/2	800	15	1/2"	220	40	45	15	220	80	40
	1200	25	3/4"				20			
	2000		1"				25			
PL/3	4000	40	1"	260	40	50	25	260	80	45
PL/4	6000	60	1 1/2"	260	40	60	40	260	80	60
PL/5	12000	100	1 1/2"	260	40	75	40	260	80	75
	15000		2"				50			
	20000		2 1/2"				65			
	30000		2 1/2"				65			



TIPO	SQUARE CONNECTION					
	DN	A	B	C	E	I
PL/1	3/8" - 1/2"	180	15	40	35	145
PL/2	1/2" - 3/4" - 1"	220	15	45	35	175
PL/3	3/4" - 1"	260	15	50	40	195
PL/4	1" - 1 1/4" - 1 1/2"	260	15	60	40	195
PL/5	1 1/2" - 2" - 2 1/2"	260	82,5	75	45	350

I valori riportati sono indicativi, è possibile fornire portate di fondo scala diverse da quelle indicate a seconda delle richieste del cliente

[Rometec srl - www.rometec.it](http://www.rometec.it) - info@rometec.it - [Rometec srl - www.rometec.it](http://www.rometec.it) - info@rometec.it