




Model
CSG

Current/ Voltage Calibrator

Ramp Function, Large Numeric LCD Display

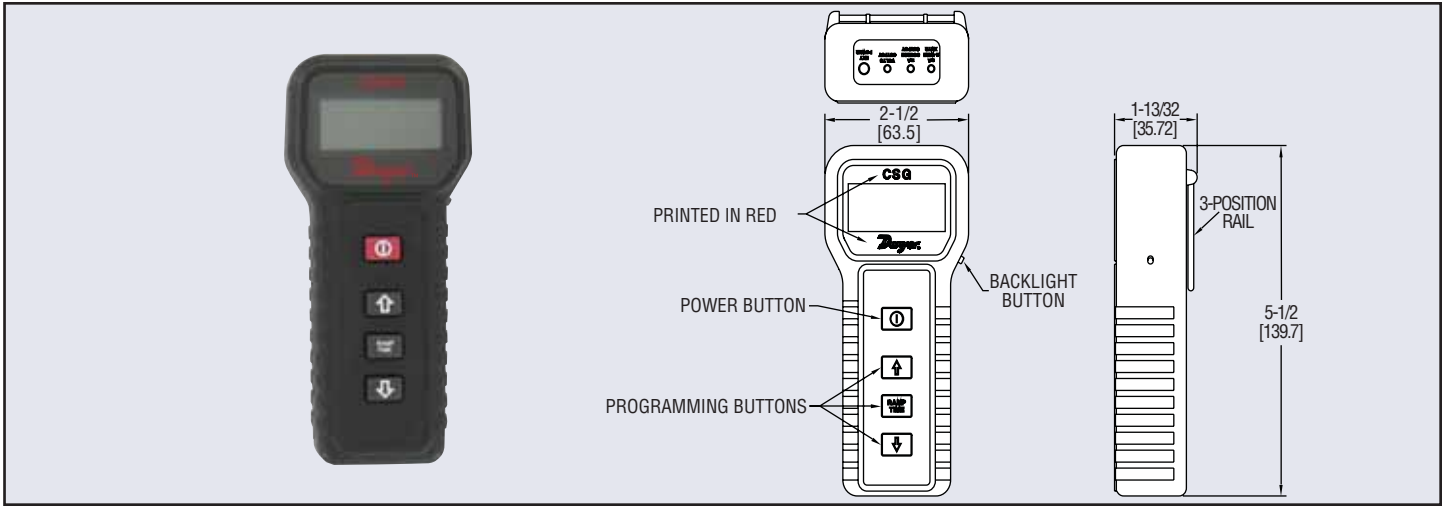

The pocket size CSG Current and Voltage Calibrator is an ideal tool for troubleshooting transmitters, transducers, motors, and actuators. The unit generates a 0 to 10 VDC signal in increments of 1 volt or a 0 to 20 mA signal in increments of 1 mA. The Model CSG features a large LCD display with a blue backlight for use in dimly lit areas. The Model CSG continuously ramps the output using user selected minimum, maximum, and ramp interval timing parameters. Units are furnished with a 9V battery, 120 VAC plug-in power supply, test leads with alligator clips, carrying case, and instruction manual.

FEATURES

- Calibration on Labs
- Process Display Configuration
- Transmitter Calibration

SPECIFICATIONS

Impedance: Voltage: 1000 min. **Current:** 300Ω max.
Output: 0 to 20 mA (1 mA increments).
0-10 VDC (1 VDC increments).
Resolution: 1 mA (current); 1 VDC (voltage).
Ramping Time Intervals: 1 to 20 sec (1 sec increments).
Ambient Operating Temperature: 32 to 122°F (0 to 50°C).
Power Requirements: 9-Volt battery or 120 VAC (provided).
Auto Power Off: 1 to 20 min.
Electrical Connections: 6 ft (1.8 m) with alligator clips.
Weight: 6 oz (170 g).

OPTIONS

Model CSG, Current Voltage Calibrator

Test
Equipment