




Series
SLD

Single Channel Leak Detection Relay

Shaft Seal Leak Protection

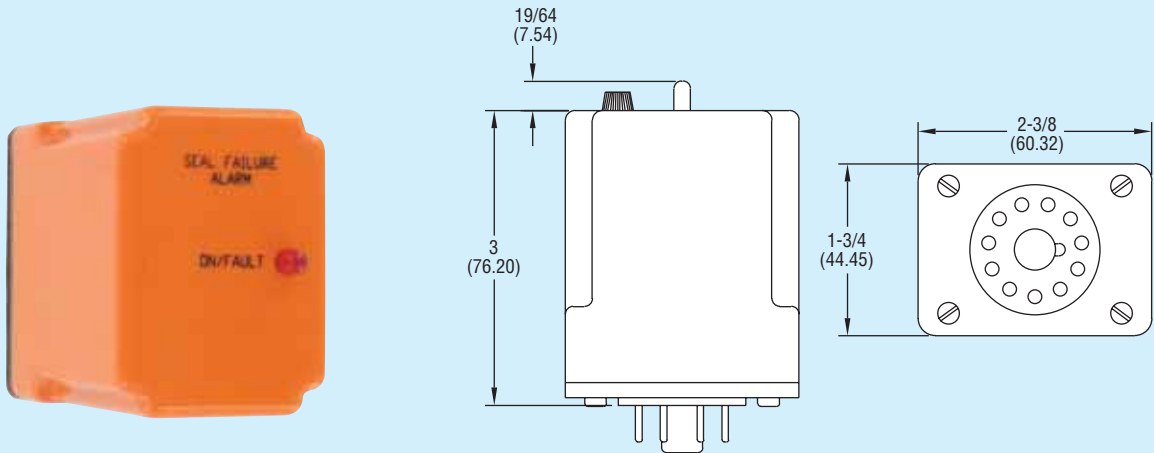

Level

Series SLD Single Channel Leak Detection Relay is used to monitor the shaft seal of a submersible pump to detect a leak before pump failure. A leak is detected by sensing the status of a float or conductivity switch installed in the seal cavity. When this resistance drops below the set sensitivity, the output relay energizes and the LED indicator illuminates. The SLD offers normally open and normally closed relay contacts to energize an alarm and de-energize the pump in the event of a leak. When the seal failure condition clears, the relay automatically resets. The SLD is available in three different sensitivities, two of which, are adjustable. All models utilize a 120 VAC control voltage. Installation is made simple with the standard 11-pin socket mount.

Model	Sensitivity
SLD-ACX	470 ohm fixed
SLD-ACY	470 to 10 k ohm adjustable
SLD-ACZ	4.7 k to 100 k ohm adjustable

SPECIFICATIONS

Power Requirement: 120 VAC, 50/60 Hz.

Power Consumption: 2 VA (approximate).

Isolation Voltage: 2500 V.

Temperature Limits:

Operating: -4 to 131°F (-20 to 55°C);

Storage: -40 to 185°F (-40 to 85°C).

Switch Type: DPDT.

Switch Voltage: 9 VDC.

Electrical Rating: 10 A @ 250 VAC resistive, 360 VA inductive.

Response Time:

Energize: 15 ms (approximate);

Release: 8 ms (approximate).

Indicators: Red LED illuminates when leak is detected.

Enclosure: Polycarbonate dust cover.

Mounting: 11-pin socket.

Weight: 8 oz (227 g).

Agency Approval: UL 508.