



*The
Sampling
Connection*

ISOLOK[®] SERIES MSE AUTOMATIC SAMPLER

Automatic Sampler for High Viscosity or Thixotropic Products

Features

- Samples high viscosity materials using a contracting annulus that ejects each collected sample into the attached container
- Collects a fixed volume up to 10 cc of sample per cycle in process pressures from atmospheric to 150 psig
- Ideal for liquids or slurries up to 150,000 centipoise
- Unique co-axial power cylinders

Options

- Port closures
- Line adapters
- Several types of containers
- Sampler enclosures (with or without heater)
- Sample heating or refrigeration
- Optional materials of construction and seal choices




Description

The ISOLOK[®] MSE series of samplers enable the collection of accurate samples of high viscosity materials such as toothpaste, peanut butter, tomato paste, juice concentrates—even rocket propellant. The MSE delivers a fixed volume of sample with each cycle. All metal parts are type 316 stainless steel with a polished finish. The sampler mounts onto the process line using a 2" Tri-Clamp ferrule mount held with a clamp and gasket. All product-contact seals are FDA-recognized elastomer compounds selected to meet application conditions. Dynamic cylinder seals are Buna-N.


The MSE's dual air cylinders extend the plunger into the process, the annulus opens and draws in product. The plunger retracts, holding the sample in the annulus. Once fully retracted, the annulus collapses, ejecting the sample into the container. Once inside the stainless steel body of the sampler, the 10 cc of sample is force-ejected into an attached sample container. The operator is isolated from the process at all times by the sampler's seal design, and the sample captured in the container is "locked out" from external influences.

ISOLOK[®] SERIES MSE SAMPLER

SAMPLING PROCESS

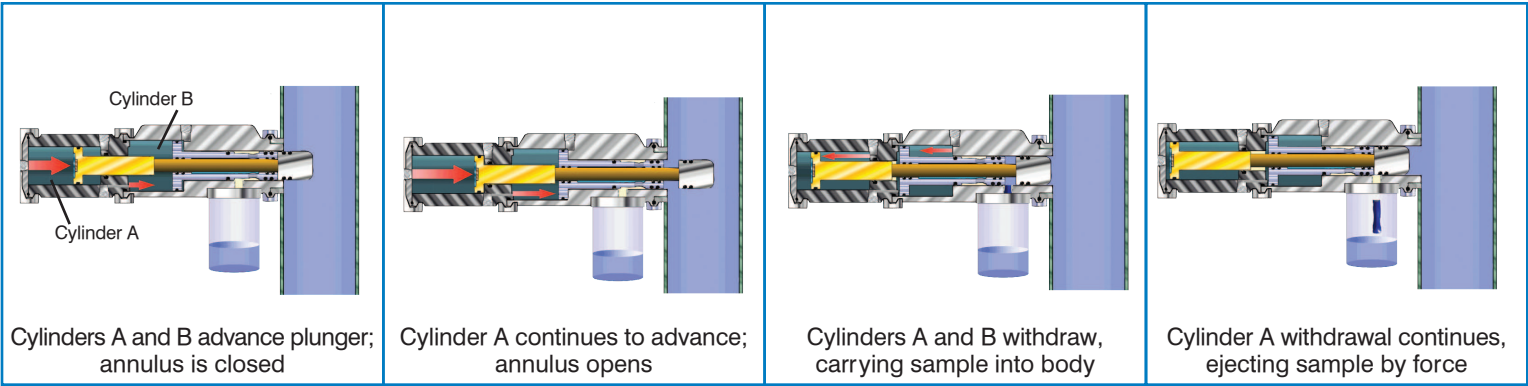

ISOLOK® MSE TECHNICAL DATA

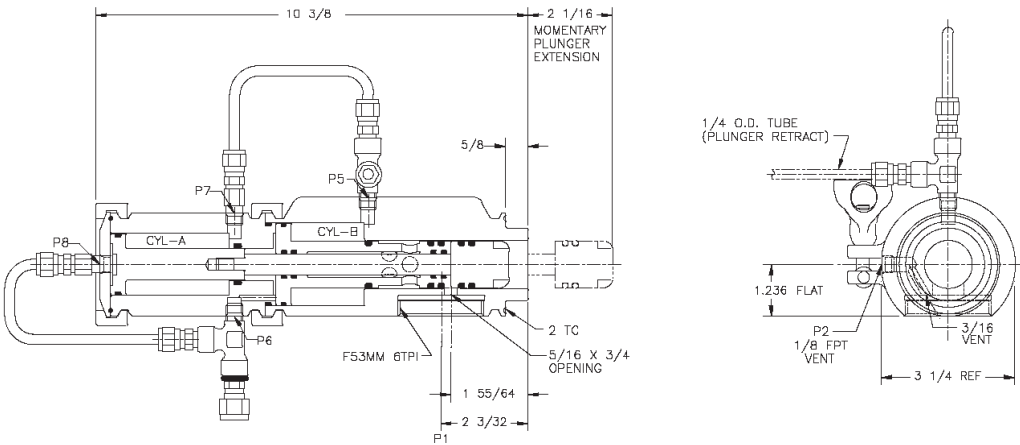

SPECIFICATIONS

Sample Volume per Cycle	max. 14 cc / 0.85 cu. in.
Basic Electrical Requirements	115 VAC, single phase, 50/60 Hz
Line Mounting Options	Tri-clamp or custom
Compressed Air Requirements	60 psig minimum
Materials of Construction	316 stainless steel
Actuator and Static Seals	TFE or Viton®
Plunger Seals	Buna-N, Viton® or custom
Overall Dimensions, length x diameter	10.3" / 26 cm x 4" / 10 cm
Net weight, not including controller or accessories	16.6 lbs. / 7.5 kg

WARNING

It is solely the responsibility of the end-user, through its own analysis and testing, to select products and materials suitable for their specific application requirements, ensure they are properly installed, safely applied, properly maintained, and limit their use to their intended purpose. Improper selection, installation, or use may result in personal injury or property damage.



SENTRY EQUIPMENT CORP

PO Box 127
Oconomowoc, WI 53066 USA
Phone: 262-567-7256
Fax: 262-567-4523

E-mail:
sales@sentry-equip.com

Website:
www.sentry-equip.com

For further information, contact:

The Sampling Connection