



# Parker Tube Fabricating Equipment

Catalog 4190 - TFE

aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



ENGINEERING YOUR SUCCESS.

# Tube Fabricating Equipment

## Contents

### Tube Fabricating Equipment

**Page 3** Small Bore Expert Training

**Page 4** Benders

**Page 6** Cutting & Deburring Tools

**Page 8** Sealants

**Page 10** Gaugeability Tools

## Introduction:

At Parker, we feel that the correct tube selection and installation are key ingredients to building leak-free, reliable systems. Within this catalog is a full compliment of tube cutters, deburring, bending, and assembly equipment for use in installing tubing systems in all types of materials.

Dedication to quality at Parker is second to none. Our resources and vast product line, supported by an ISO 9001 Certified Quality Management System, is available through our worldwide distribution network. For more information regarding our tube fabrication equipment and other products and services, please contact your nearest Parker Sales Office, details found on back page.



### **WARNING**

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries or its authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

### **Offer of Sale**

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

Join the Parker IPDE Facebook and YouTube communities



## Tube Fabricating Equipment



### Small Bore Expert Training



Small Bore Expert training is Parker Instrumentation's training programme for small bore tubing systems.

The course has been developed as an upgrade and replacement to our industry leading Safety at Work Programme, provide material that is relevant to your sales professionals and enable them to conduct their own training sessions with their customer base.

#### Some of the advantages over our existing programme are:

- Greater knowledge of small bore tubing systems
- Increased product familiarity
- Improved selling and presentation ability
- Increased skills and confidence in dealing with small bore systems
- Ability to deliver chargeable training

#### The benefits that your nominated trainer can pass on to your customer base are:

- Increased understanding of their own systems and installation practices
- Improvements in the safety and integrity of their small bore tubing systems
- Overall asset integrity improvement

#### What does the Trainer get?

- 5 days of training, including:
  - 2 days of presentation training

#### A comprehensive kit including:

- Spanners
- Tube benders
- Tube cutter
- De-burrer
- Vice grips
- Fittings samples
- Promotional clothing
- License fee

The per delegate cost for the course is £1500 and includes all of the aforementioned items.

All ING distributors will need to have at least one certified trainer in their organisation. This will be the only licensed and certified training course that we will allow to be run with our support.

#### What else do you get?


- Access to the only certified IPDE training course
- A training program we can proudly market to our customers

If you would like further information relating to this training, please contact Parker Instrumentation: +44 (0) 1271 313131

# Tube Benders

**Parker PTB heavy duty 180° tube bender with a unique indexing handle for 1/4" to 1/2" and 6mm to 12mm low pressure tube**


Tube O.D.	Bend Radius	Weight (Kg)	Part Number
Imperial			
1/4	9/16	0.54	PTB-4T
3/8	15/16	1.68	PTB-6T
1/2	1 1/2	3.45	PTB-8T
Metric			
6	14.3	0.54	PTB-6M
8	23.8	1.00	PTB-8M
10	23.8	1.68	PTB-10M
12	38.1	3.45	PTB-12M

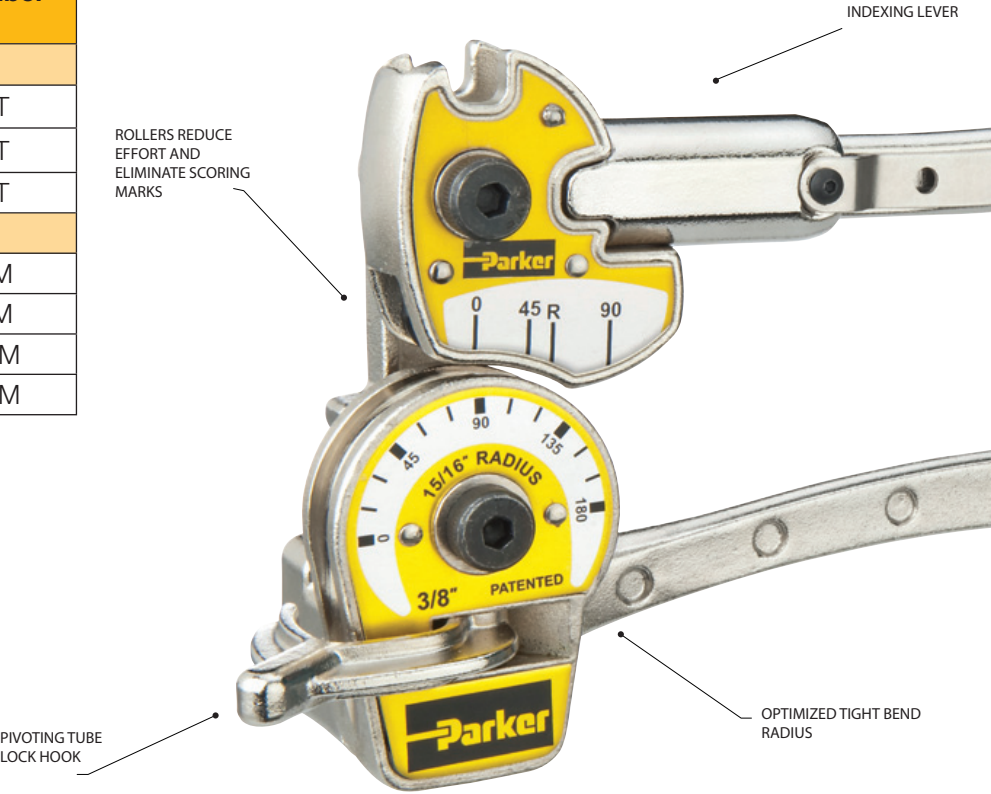


For bending soft copper, aluminum, brass, steel stainless st

## Features

- New design for accurate and tight bends up to 180° in stainless steel and other metals
- Rollers in bending handle reduce friction and bending effort; eliminate scoring of tubing
- Comfortable and durable ergonomically molded cushion grips
- Vice lug for mounting in vice
- Clamshell packaging available for 1/4", 3/8", 6mm, 8mm and 10mm models
- Patented, quick action trigger release repositions two-stage handle midway through a bend when both handles meet



The correct part number is easily derived from the following number sequence. The two product characteristics required are coded as shown below.

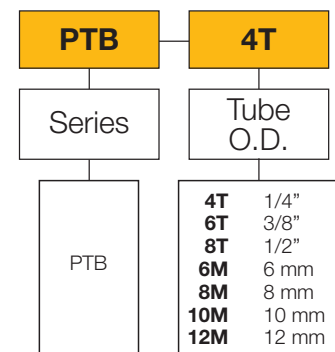

## Cutting & Deburring Tool

### Parker PTC tube cutter for 1/8" to 1-1/8" and 4mm to 28mm O.D. tubing



4-1/4" LOW PROFILE  
CONSISTENT SWING  
RADIUS

SELF-CLEANING  
BURR REMOVAL  
GROOVE

LIGHTWEIGHT ALUMINIUM BODY

ENCLOSED STEEL THRUST BEARING  
FOR SMOOTH CUTTING

All tube cutters are 100% factory tested to ensure accurate spiral-free cutting.

The Parker tube cutter cuts stainless steel, soft copper, and aluminium tubing from 1/8 to 1-1/8 in. and 4 to 28 mm O.D.


## Features

- Lower profile swing radius - 4-1/4"
- Rollers feature flare cut-off groove to reduce tube loss when damaged flare is removed
- Lightweight die-cast solid aluminium body
- Enclosed hardend steel, thrust bearing feed mechanism for smoothest cutting action and trouble free operation
- Cutter wheels are made of the highest quality wear and abrasion-resistant steel and precision machined to exacting specifications for accurate cutting and long life
- Unique design eliminates spiraling for clean right angle cuts
- Durable low gloss black wrinkle finish for improved wear resistance

## Parker PTD Inner-Outer Reaming and Deburring Tools, for 3/16" to 1-1/2" O.D. tubing

A quick twist of the wrist will deburr either the O.D. or the I.D. of the tube end. Parker's deburrer can be used on annealed steel, stainless steel, copper or aluminium, for tube sizes 3/16" to 1-1/2" O.D.

Insert the tube into the convexed end of the deburrer for inside deburring and the opposite end for outside deburring. Rotate in either direction.

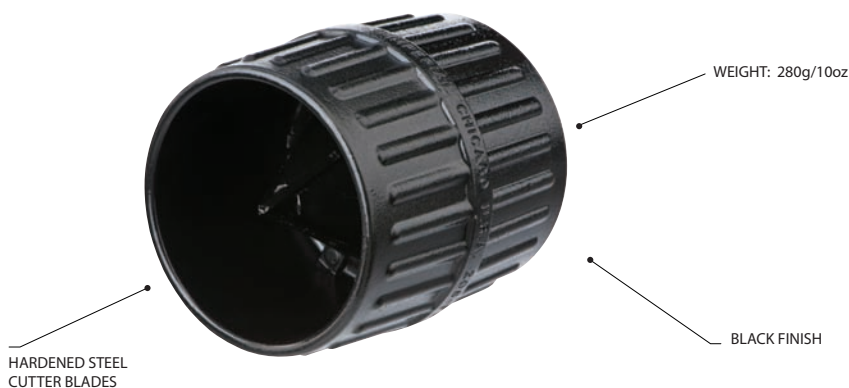


### Features

- Reams both inside and outside edges of tube with 3 hollow ground cutters
- Tough die cast body
- Replacement blades can be ordered
- Deburrs both clockwise and anti-clockwise
- Fluted body is shaped to fit comfortably in palm

## Parker PTV Tru-Kut Sawing Vice


Hacksaw guide will accommodate tube, pipe and hose from sizes 3 (3/16" O.D.) to 32 (2" O.D.). Assures square cut-offs within  $\pm 1^\circ$ . Use a fine tooth hacksaw blade for smoother cuts.

**How To Use:** Mount in vice or bolt to bench. Clamp tubing, pipe or hose into the Tru-Kut vice and cut off; guide ensures accurate square cuts.

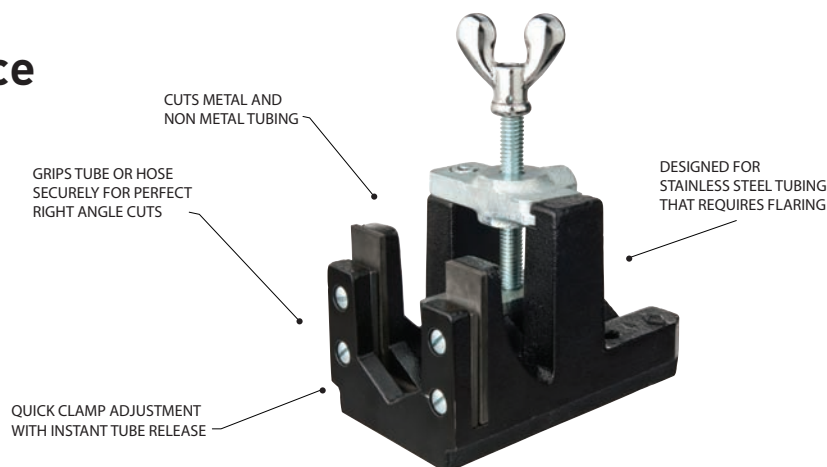

## How to Order - Cutters, Deburrers and Vices

The correct part number is easily derived from the following number sequence. The two product characteristics required are coded as shown below.

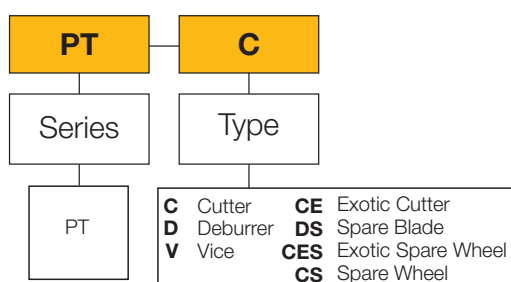

## Sealants

### Parker PSL LOCTITE® 567™

A high performance sealant that locks and seals metal, tapered pipe threads and fittings. Ideal for stainless steel, aluminum, galvanized metal and other inert metals, 567™ has excellent solvent resistance and withstands temperatures to 204°C (400°F).



DESIGNED FOR THE LOCKING AND SEALING OF METAL TAPERED THREADS AND FITTINGS

## Features

- High lubricating properties of this compound prevent galling on stainless steel, aluminum and all other metal pipe threads and fittings
- Recommended for industrial applications in the chemical processing, petroleum refining, pulp/paper, waste treatment, textile, utilities/power generation, marine, automotive, industrial equipment, gas compression and distribution industries.

### Parker PSP Sealant

Sealing with Parker's solvent-free, liquid gasking compounds represents a technological advanced solution. Curing in the absence of air, which occurs after contact with metal, is the outstanding feature of anaerobic gasking compounds. As with any sealant and lubrication, safety precautions are always advised.

These sealants are available in 50ml and 200ml sizes.

## Features

- Quick-curing
- Solvent free
- One component sealant
- Serves to seal threaded connections, flanges, housings and covers
- Wide temperature range
- Resistant to chemicals and solvents

EASY AND CLEAN APPLICATION



UNIQUE PARKER BRANDED SEALANT

TEMPERATURE RESISTANCE FROM -60°C TO +150°C

# PTFE Tape

Polytetrafluoroethylene, or PTFE, film is cut to specified widths for use in sealing pipe threads. The tape is wrapped around the exposed threads of a pipe before it is screwed into place.

The tape is commonly used commercially in pressurised water systems as well as in air compression equipment and thread joints with coarse threads.


One of the defining characteristics of PTFE is how good it is at defeating friction. The use of PTFE tape in tapered pipe threads performs a lubricating function, which more easily allows the threads to be screwed together, to the point of deformation, which is what creates the seal.



Part Number: PS - PTFE

## How to Order - Sealants

The correct part number is easily derived from the following number sequence. The three product characteristics required are coded as shown below.

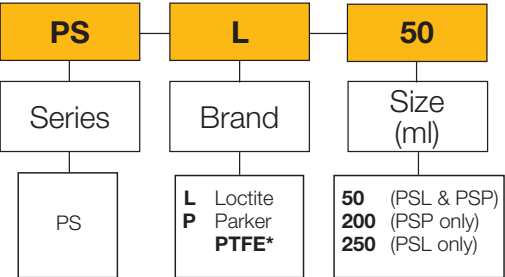

\* No size required

## Gaugeability Tools

### Parker PTM Tube Marker

Put burnish marks on the tubing quickly and accurately with this easy-to-use tube marker. Also used to check the burnish mark position. (Good for the life of the fitting).

Ensures correct tube depth insertion into the fitting body.

### How to Order - Tube Marker

The correct part number is easily derived from the following number sequence. The two product characteristics required are coded as shown below.

PTM	4T																												
Series	Size																												
PTM	<table><tr><td>2T</td><td>1/8"</td><td>6M</td><td>6 mm</td></tr><tr><td>4T</td><td>1/4"</td><td>8M</td><td>8 mm</td></tr><tr><td>6T</td><td>3/8"</td><td>10M</td><td>10 mm</td></tr><tr><td>8T</td><td>1/2"</td><td>12M</td><td>12 mm</td></tr><tr><td>10T</td><td>5/8"</td><td>16M</td><td>16mm</td></tr><tr><td>12T</td><td>3/4"</td><td>20M</td><td>20mm</td></tr><tr><td>16T</td><td>1"</td><td>25M</td><td>25mm</td></tr></table>	2T	1/8"	6M	6 mm	4T	1/4"	8M	8 mm	6T	3/8"	10M	10 mm	8T	1/2"	12M	12 mm	10T	5/8"	16M	16mm	12T	3/4"	20M	20mm	16T	1"	25M	25mm
2T	1/8"	6M	6 mm																										
4T	1/4"	8M	8 mm																										
6T	3/8"	10M	10 mm																										
8T	1/2"	12M	12 mm																										
10T	5/8"	16M	16mm																										
12T	3/4"	20M	20mm																										
16T	1"	25M	25mm																										



### Parker PPT Preassembly Tool

**How To Use:** Slide nut and ferrule(s) onto tube. Set tube into presetting tool, and bottom tube against shoulder tool. Finger tighten the nut and then tighten the nut 1 turn with a wrench. Remove tube from tool. Advance the nut so it is finger-tight.

Advance the nut 1/2 turn. If torque rise is not felt in 1/4 turn, turn the nut to torque rise, loosen the nut to finger-tight, and makeup nut 1/2 turn.

### How to Order - Preassembly Tool


The correct part number is easily derived from the following number sequence. The two product characteristics required are coded as shown below.

PPT		4T																																																	
Series		Size																																																	
PPT	<table><tr><td>2T</td><td>1/8"</td><td>3M</td><td>3mm</td></tr><tr><td>3T</td><td>3/16"</td><td>4M</td><td>4mm</td></tr><tr><td>4T</td><td>1/4"</td><td>6M</td><td>6 mm</td></tr><tr><td>5T</td><td>5/16"</td><td>8M</td><td>8 mm</td></tr><tr><td>6T</td><td>3/8"</td><td>10M</td><td>10 mm</td></tr><tr><td>8T</td><td>1/2"</td><td>12M</td><td>12 mm</td></tr><tr><td>10T</td><td>5/8"</td><td>14M</td><td>14mm</td></tr><tr><td>12T</td><td>3/4"</td><td>16M</td><td>16mm</td></tr><tr><td>14T</td><td>7/8"</td><td>18M</td><td>18mm</td></tr><tr><td>16T</td><td>1"</td><td>20M</td><td>20mm</td></tr><tr><td></td><td></td><td>22M</td><td>22mm</td></tr><tr><td></td><td></td><td>25M</td><td>25mm</td></tr></table>			2T	1/8"	3M	3mm	3T	3/16"	4M	4mm	4T	1/4"	6M	6 mm	5T	5/16"	8M	8 mm	6T	3/8"	10M	10 mm	8T	1/2"	12M	12 mm	10T	5/8"	14M	14mm	12T	3/4"	16M	16mm	14T	7/8"	18M	18mm	16T	1"	20M	20mm			22M	22mm			25M	25mm
2T	1/8"	3M	3mm																																																
3T	3/16"	4M	4mm																																																
4T	1/4"	6M	6 mm																																																
5T	5/16"	8M	8 mm																																																
6T	3/8"	10M	10 mm																																																
8T	1/2"	12M	12 mm																																																
10T	5/8"	14M	14mm																																																
12T	3/4"	16M	16mm																																																
14T	7/8"	18M	18mm																																																
16T	1"	20M	20mm																																																
		22M	22mm																																																
		25M	25mm																																																



## Parker PT Inspection Gauges

This unique to Parker combination gauge has dual purpose. Use the Go/No Go portion (on one end) to check the tube insertion depth. Use the other end to check the space between the nut and body hex. (Correct initial make-up prevents the gauge from being inserted).

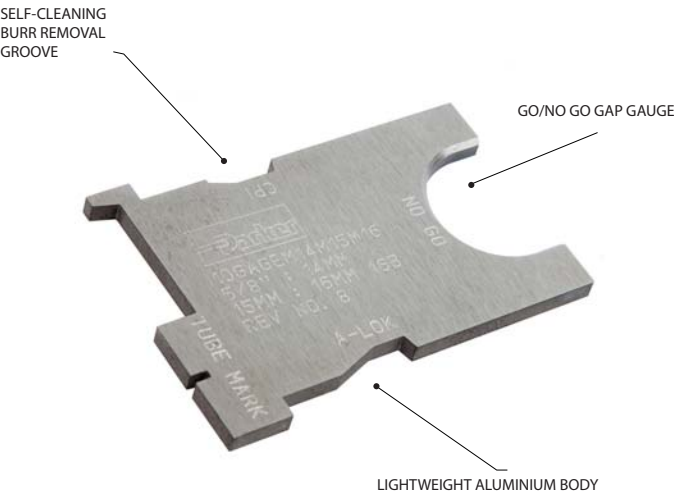

### How to Order - PT Combination Gauge

The correct part number is easily derived from the following number sequence. The three product characteristics required are coded as shown below.

PT	CG	4T																												
Series	Type	Size																												
PT	Combination Gauge	<table><tr><td>4T</td><td>1/4"</td><td>6M</td><td>6 mm</td></tr><tr><td>6T</td><td>3/8"</td><td>8M</td><td>8 mm</td></tr><tr><td>8T</td><td>1/2"</td><td>10M</td><td>10 mm</td></tr><tr><td>10T</td><td>5/8"</td><td>12M</td><td>12 mm</td></tr><tr><td>12T</td><td>3/4"</td><td>16M</td><td>16mm</td></tr><tr><td>16T</td><td>1"</td><td>20M</td><td>20mm</td></tr><tr><td></td><td></td><td>25M</td><td>25mm</td></tr></table>	4T	1/4"	6M	6 mm	6T	3/8"	8M	8 mm	8T	1/2"	10M	10 mm	10T	5/8"	12M	12 mm	12T	3/4"	16M	16mm	16T	1"	20M	20mm			25M	25mm
4T	1/4"	6M	6 mm																											
6T	3/8"	8M	8 mm																											
8T	1/2"	10M	10 mm																											
10T	5/8"	12M	12 mm																											
12T	3/4"	16M	16mm																											
16T	1"	20M	20mm																											
		25M	25mm																											

This compact C-Ring gap gauge is for imperial and metric sizes. It effectively checks the gap dimensions for correct initial make-up. All sizes can be combined on a key ring for easy handling.



### How to Order - PT Gap Gauge

The correct part number is easily derived from the following number sequence. The three product characteristics required are coded as shown below.

PT	GG	4										
Series	Type	Size										
PT	Gap Gauge	<table><tr><td>4</td><td>1/4" &amp; 6MM</td></tr><tr><td>6</td><td>3/8" &amp; 10MM</td></tr><tr><td>8</td><td>1/2" &amp; 12MM</td></tr><tr><td>12</td><td>3/4" &amp; 18MM</td></tr><tr><td>16</td><td>1" &amp; 25MM</td></tr></table>	4	1/4" & 6MM	6	3/8" & 10MM	8	1/2" & 12MM	12	3/4" & 18MM	16	1" & 25MM
4	1/4" & 6MM											
6	3/8" & 10MM											
8	1/2" & 12MM											
12	3/4" & 18MM											
16	1" & 25MM											

## Parker Worldwide

AE – UAE, Dubai  
Tel: +971 4 8875600  
[parker.me@parker.com](mailto:parker.me@parker.com)

AR – Argentina, Buenos Aires  
Tel: +54 3327 44 4129

AT – Austria, Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
[parker.austria@parker.com](mailto:parker.austria@parker.com)

AT – Eastern Europe, Wiener Neustadt  
Tel: +43 (0)2622 23501 970  
[parker.easteurope@parker.com](mailto:parker.easteurope@parker.com)

AU – Australia, Castle Hill  
Tel: +61 (0)2-9634 7777

AZ – Azerbaijan, Baku  
Tel: +994 50 2233 458  
[parker.azerbaijan@parker.com](mailto:parker.azerbaijan@parker.com)

BE/LX – Belgium, Nivelles  
Tel: +32 (0)67 280 900  
[parker.belgium@parker.com](mailto:parker.belgium@parker.com)

BR-Brazil, São José dos Campos  
Tel: 0800 7275374  
[falecom@parker.com](mailto:falecom@parker.com)

BY – Belarus, Minsk  
Tel: +375 17 209 9399  
[parker.belarus@parker.com](mailto:parker.belarus@parker.com)

CA – Canada, Grimsby, Ontario  
Tel: +1 905-945-2274  
[ipd\\_canada@parker.com](mailto:ipd_canada@parker.com)

CH – Switzerland, Etoy  
Tel: +41 (0) 21 821 02 30  
[parker.switzerland@parker.com](mailto:parker.switzerland@parker.com)

CN – China, Shanghai  
Tel: +86 21 5031 2525

CZ – Czech Republic, Klecany  
Tel: +420 284 083 111  
[parker.czechrepublic@parker.com](mailto:parker.czechrepublic@parker.com)

DE – Germany, Kaarst  
Tel: +49 (0)2131 4016 0  
[parker.germany@parker.com](mailto:parker.germany@parker.com)

DK – Denmark, Ballerup  
Tel: +45 43 56 04 00  
[parker.denmark@parker.com](mailto:parker.denmark@parker.com)

ES – Spain, Madrid  
Tel: +34 902 33 00 01  
[parker.spain@parker.com](mailto:parker.spain@parker.com)

FI – Finland, Vantaa  
Tel: +358 (0)20 753 2500  
[parker.finland@parker.com](mailto:parker.finland@parker.com)

FR – France, Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
[parker.france@parker.com](mailto:parker.france@parker.com)

GR – Greece, Athens  
Tel: +30 210 933 6450  
[parker.greece@parker.com](mailto:parker.greece@parker.com)

HK – Hong Kong  
Tel: +852 2428 8008

HU – Hungary, Budapest  
Tel: +36 1 220 4155  
[parker.hungary@parker.com](mailto:parker.hungary@parker.com)

IE – Ireland, Dublin  
Tel: +353 (0)1 466 6370  
[parker.ireland@parker.com](mailto:parker.ireland@parker.com)

IN – India, Mumbai  
Tel: +91 22 6513 7081-85

IT – Italy, Corsico (MI)  
Tel: +39 02 45 19 21  
[parker.italy@parker.com](mailto:parker.italy@parker.com)

JP – Japan, Fujisawa  
Tel: +(81) 4 6635 3050

KR – South Korea, Seoul  
Tel: +82 2 559 0400

KZ – Kazakhstan, Almaty  
Tel: +7 7272 505 800  
[parker.easteurope@parker.com](mailto:parker.easteurope@parker.com)

LV – Latvia, Riga  
Tel: +371 6 745 2601  
[parker.latvia@parker.com](mailto:parker.latvia@parker.com)

MX – Mexico, Apodaca  
Tel: +52 81 8156 6000

MY – Malaysia, Shah Alam  
Tel: +603-78490800

NL – The Netherlands, Oldenzaal  
Tel: +31 (0)541 585 000  
[parker.nl@parker.com](mailto:parker.nl@parker.com)

NO – Norway, Stavanger  
Tel: +47 (0)51 826 300  
[parker.norway@parker.com](mailto:parker.norway@parker.com)

NZ – New Zealand, Mt Wellington  
Tel: +64 9 574 1744

PL – Poland, Warsaw  
Tel: +48 (0)22 573 24 00  
[parker.poland@parker.com](mailto:parker.poland@parker.com)

PT – Portugal, Leca da Palmeira  
Tel: +351 22 999 7360  
[parker.portugal@parker.com](mailto:parker.portugal@parker.com)

RO – Romania, Bucharest  
Tel: +40 21 252 1382  
[parker.romania@parker.com](mailto:parker.romania@parker.com)

RU – Russia, Moscow  
Tel: +7 495 645-2156  
[parker.russia@parker.com](mailto:parker.russia@parker.com)

SE – Sweden, Spånga  
Tel: +46 (0)8 59 79 50 00  
[parker.sweden@parker.com](mailto:parker.sweden@parker.com)

SG – Singapore,  
Tel: +65 6887 6300

SK – Slovakia, Banská Bystrica  
Tel: +421 484 162 252  
[parker.slovakia@parker.com](mailto:parker.slovakia@parker.com)

SL – Slovenia, Novo Mesto  
Tel: +386 7 337 6650  
[parker.slovenia@parker.com](mailto:parker.slovenia@parker.com)

TH – Thailand, Bangkok  
Tel: +662 717 8140

TR – Turkey, Istanbul  
Tel: +90 216 4997081  
[parker.turkey@parker.com](mailto:parker.turkey@parker.com)

TW – Taiwan, Taipei  
Tel: +886 2 2298 8987

UA – Ukraine, Kiev  
Tel: +380 44 494 2731  
[parker.ukraine@parker.com](mailto:parker.ukraine@parker.com)

UK – United Kingdom, Barnstaple  
Tel: +44 (0)1271 313131  
[parker.uk@parker.com](mailto:parker.uk@parker.com)

US – USA, Cleveland  
Tel: +1 216 896 3000

ZA – South Africa, Kempton Park  
Tel: +27 (0)11 961 0700  
[parker.southafrica@parker.com](mailto:parker.southafrica@parker.com)

European Product Information Centre  
Free phone: 00 800 27 27 5374  
(from AT, BE, CH, CZ, DE, DK, EE, EI, ES, FI, FR, IT, NL, NO, PL, RU, SE, SK, UK, ZA)

© 2010 Parker Hannifin Corporation. All rights reserved



Parker Hannifin Ltd  
Instrumentation Products  
Division Europe  
Riverside Road  
Pottington Business Park  
Barnstaple, Devon, EX31 1NP  
United Kingdom  
Tel.: +44 (0) 1271 313131  
Fax: +44 (0) 1271 373636  
[www.parker.com/ipd](http://www.parker.com/ipd)

Parker Hannifin Corporation  
Instrumentation Products Division  
1005 A Cleaner Way  
Huntsville  
Alabama  
AL 35805  
USA  
Tel: + 1 (256) 881-2040  
Fax: + 1 (256) 881-5072  
[www.parker.com/ipdus](http://www.parker.com/ipdus)

Catalog 4190-TFE 01.11