




Series
LFM

Polycarbonate Flow meter

In-Line or Panel Mount

Flow

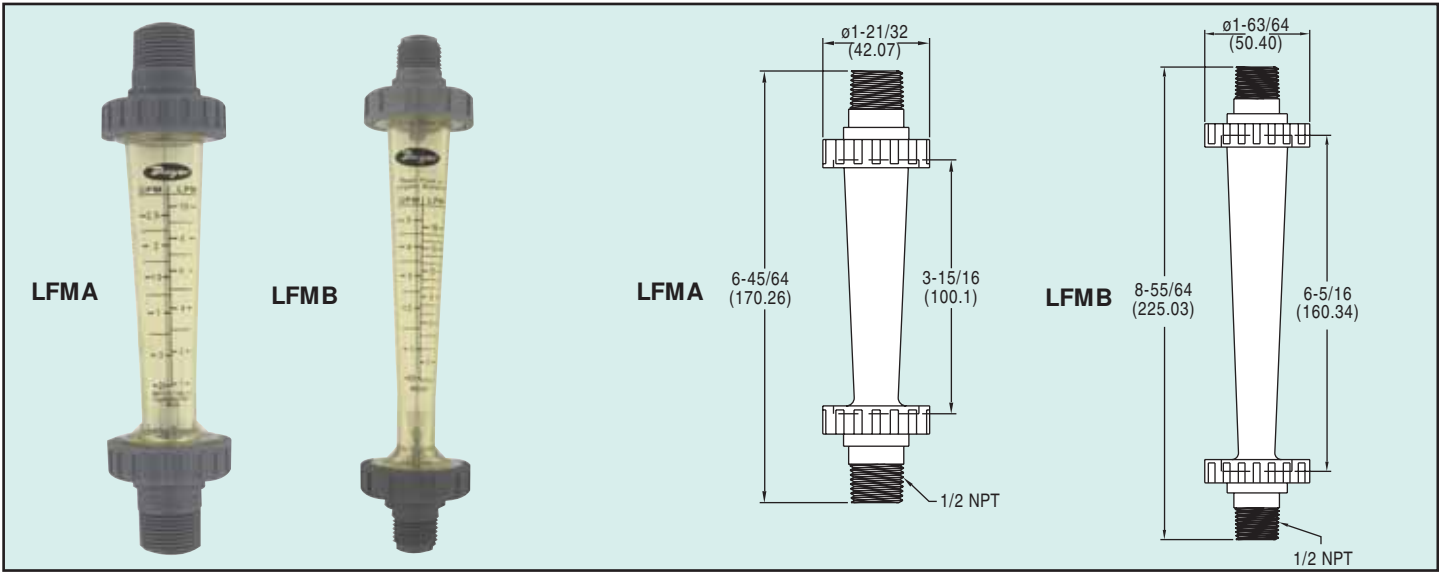

The **New LFM Series Flowmeters** are made of injection molded, heat and chemically resistant polycarbonate bodies and fittings. Series LFM flow meters have dual scales measuring in both GPM and LPM with 5% accuracy. A textured background on the body enhances scale readability. Standard in-line models come with 1/2" male NPT process connections while panel mount installation is available with 90° elbow fittings that include panel lock nuts. Various other fittings are available.

SPECIFICATIONS

Service: Water.

Wetted Materials:

Body: Polycarbonate.

Flange Nut: ABS.

Float Stop: ABS.

O rings: Fluoroelastomer.

Rod & Float: 316 SS.

Connections: Metric Union and male NPT fittings-ABS;
90° male NPT elbow fittings-PVC

Pressure Limit: 120 PSI (8.2 bar) at 68°F (20°C); 90° elbow fittings 116 PSI (8 bar) at 68°F (20°C).

Accuracy: ±5%.

Process Connection: **LFMA:** 1/2" male NPT. Optional 20 mm Metric Union.

LFMB: 1/2" male NPT. Optional 20mm Metric Union or 1/2" male NPT with 90° elbow.

Weight: LFMA: 2 oz (56.7 g), LFMB: 3 oz (85.0 g).

Accessories

LFMA

A-560 20mm Metric Union Fittings

A-566 1/2" male NPT Fittings

LFMB

A-561 20mm Metric Union Fittings

A-567 1/2" male NPT Fittings

A-575 1/2" male NPT with 90° Elbow Fittings

MODELS

Model No.	Range (GPM water)	Process Connection	Float
LFMA-01-A2	0.1-1 (.5-4 LPM)	1/2" male NPT	316 SS
LFMA-02-A2	0.2-2 (1-7 LPM)	1/2" male NPT	316 SS
LFMA-03-A2	0.5-5 (1.8-18 LPM)	1/2" male NPT	316 SS
LFMB-04-A2	0.1-1 (.5-4 LPM)	1/2" male NPT	316 SS
LFMB-05-A2	0.2-2 (1-7 LPM)	1/2" male NPT	316 SS
LFMB-06-A2	0.5-5 (1.8-18 LPM)	1/2" male NPT	316 SS

CAUTION: Series LFM Flowmeters are for indoor use only or areas without direct sunlight. Polycarbonate is adversely affected by ultraviolet light.




Series
LFM

Polycarbonate Flow meter

In-Line or Panel Mount Meters

Flow

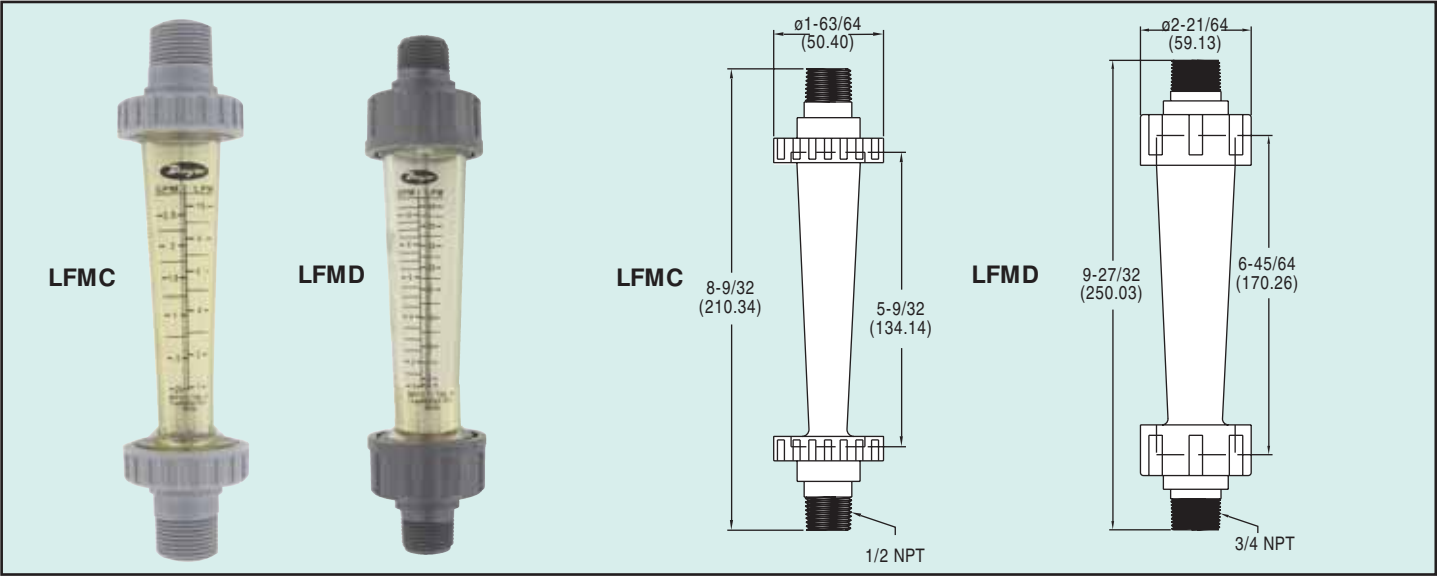

The **New LFM Series Flowmeters** are made of injection molded, heat and chemically resistant polycarbonate bodies and fittings. Series LFM flow meters have dual scales measuring in both GPM and LPM with 5% accuracy. A textured background on the body enhances scale readability. Standard in-line models come with 1/2" male NPT connections for LFMC and 3/4" male NPT connections for LFMD. Panel mount installation is available with 90° elbow fittings that includes panel lock nuts. Various other fittings are available.

Accessories

LFMC

- A-562** 20mm Metric Union Fittings
- A-567** 1/2" male NPT Fittings
- A-568** 3/4" male NPT Fittings
- A-576** 1/2" male NPT with 90° Elbow Fittings

LFMD

- A-563** 32mm Metric Union Fittings
- A-569** 3/4" male NPT Fittings
- A-572** 3/4" female NPT Fittings
- A-577** 3/4" male NPT with 90° Elbow Fittings

MODELS

Model No.	Range (GPM water)	Process Connection	Float
LFMC-07-A2	0.25-2.5 (1-10 LPM)	1/2" male NPT	316 SS
LFMC-08-A2	0.5-5 (1.8-18 LPM)	1/2" male NPT	316 SS
LFMC-09-A2	0.8-8 (3-30 LPM)	1/2" male NPT	316 SS
LFMD-10-C2	0.8-8 (3-30 LPM)	3/4" male NPT	316 SS
LFMD-11-C2	1-10 (4-40 LPM)	3/4" male NPT	316 SS

SPECIFICATIONS

Service: Water.

Wetted Materials:

Body: Polycarbonate.

Flange Nut: ABS.

Float Stop: LFMC-ABS; LFMD-Polypropylene.

O rings: Fluoroelastomer.

Rod & Float: 316 SS.

Connections: 90° male NPT elbow fittings-PVC.
20 mm metric union fittings-ABS.
32 mm metric union fittings-PVC.
1/2" & 3/4" male NPT fittings for LFMC-ABS.
3/4" male & female NPT fittings for LFMD-PA66 nylon.

Pressure Limit: 120 PSI (8.2 bar) at 68°F (20°C); 90° elbow fitting 116 PSI (8 bar) at 68°F (20°C).

Accuracy: ±5%.

Process Connection: **LFMC:** 1/2" male NPT. Optional 20 mm Metric Union, 3/4" male NPT, or 1/2" male NPT with 90° elbow.

LFMD: 3/4" male NPT. Optional 32 mm Metric Union, 3/4" female NPT, or 3/4" male NPT with 90° elbow.

Weight: LFMC: 4 oz (113.4 g), LFMD: 10 oz (283.5 g).

CAUTION: Series LFM Flowmeters are for indoor use only or areas without direct sunlight. Polycarbonate is adversely affected by ultraviolet light.




Series
LFM

Polycarbonate Flow meter

In-Line or Panel Mount Meters

Flow

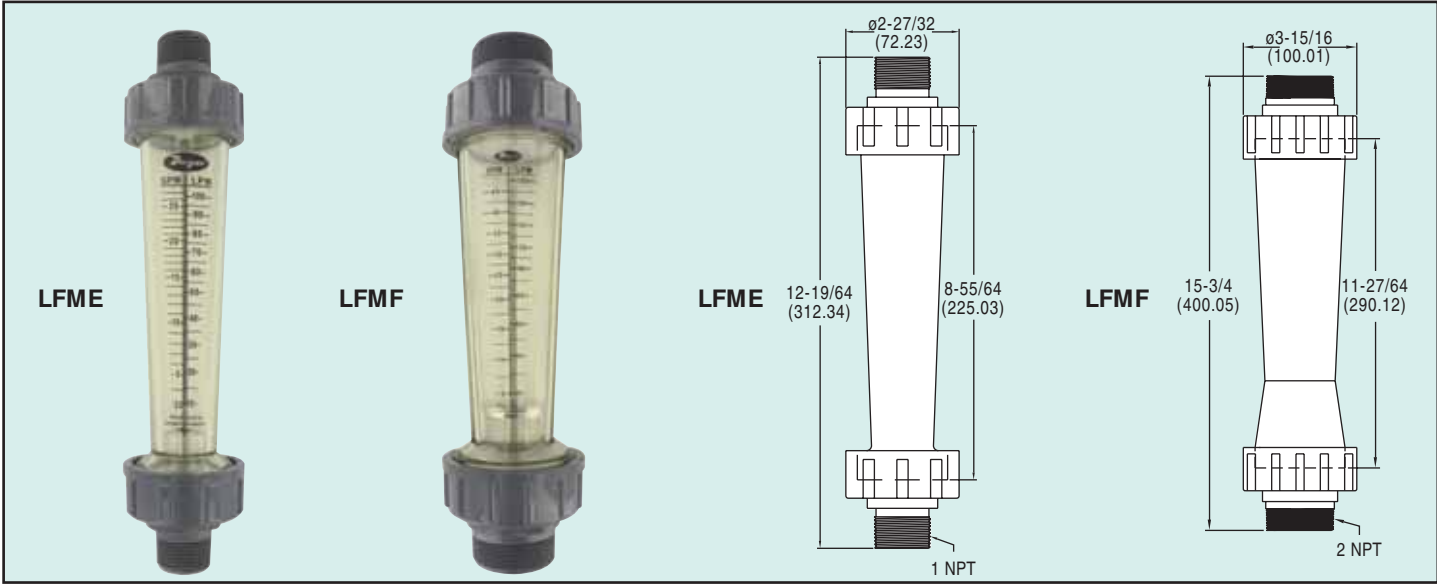

The **New LFM Series Flowmeters** are made of injection molded, heat and chemically resistant polycarbonate bodies and fittings. Series LFM flow meters have dual scales measuring in both GPM and LPM with 5% accuracy. A textured background on the body enhances scale readability. Standard in-line models come with 1/2" male NPT connections for LFME and 2" male NPT connections for LFMF. Panel mount installation is available with 90° elbow fittings that includes panel lock nuts. Various other fittings are available.

Accessories

LFME

- A-564 40mm Metric Union Fittings
- A-570 1" male NPT Fittings
- A-573 1" female NPT Fittings
- A-578 1" male NPT with 90° Elbow Fittings

LFMF

- A-565 63mm Metric Union Fittings
- A-571 2" male NPT Fittings
- A-574 2" female NPT Fittings

MODELS

Model No.	Range (GPM water)	Process Connection	Float
LFME-12-F2	1.2-12 (5-50 LPM)	1" male NPT	316 SS
LFME-13-F2	2-20 (8-80 LPM)	1" male NPT	316 SS
LFME-14-F2	2.5-25 (10-100 LPM)	1" male NPT	316 SS
LFMF-15-I2	2.5-25 (10-100 LPM)	2" male NPT	316 SS
LFMF-16-I2	5-45 (20-180 LPM)	2" male NPT	316 SS
LFMF-17-I2	7-70 (25-250 LPM)	2" male NPT	316 SS

SPECIFICATIONS

Service: Water.

Wetted Materials:

Body: Polycarbonate.

Flange Nut: ABS.

Float Stop: Polypropylene.

O rings: Fluoroelastomer.

Rod & Float: 316 SS.

Connections: Male & female NPT fittings-PA66 nylon.
1" male NPT 90° elbow fittings-PVC.
40 mm metric union fittings-PVC.
63 mm metric union fittings-ABS.

Pressure Limit: 120 PSI (8.2 bar) at 68°F (20°C); 90° elbow fittings 116 PSI (8 bar) at 68°F (20°C).

Accuracy: ±5%.

Process Connection:

LFME: 1" male NPT. Optional 40 mm Metric Union, 1" female NPT, or 1" male NPT with 90° elbow.

LFMF: 2" male NPT. Optional 63 mm Metric Union or 2" female NPT.

Weight: LFME: 15 oz (425.2 g), LFMF: 40 oz (1.1 kg).

CAUTION: Series LFM Flowmeters are for indoor use only or areas without direct sunlight. Polycarbonate is adversely affected by ultraviolet light.