


Series AVFS

## Air Flow Switch

Monitor's Flow in Ducts with Contact Output and Local LED Indication

CE

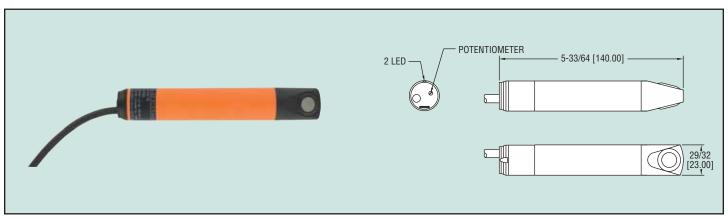

The new Series AVFS Adjustable Air Flow Switch complements the Dwyer Instruments line of thermo-anemometer transmitters and handheld instruments. The AVFS is specifically designed to monitor air flow in ducts and provides a 3A contact output to indicate a change or loss of flow. Simply turn on the fan or air handling unit and adjust the set-point via the potentiometer to show normal status. Then alter a damper or decrease fan speed to activate the AVFS. The AVFS will signal a loss of flow and the N.O. SPST output will indicate the detected decrease. For ease of installation and system trouble-shooting, the Series AVFS possesses a red/green LED indication to provide local status if the air flow is above (green) or below (red) the set-point. The AVFS provides a +/-5% set-point repeatability across a full scale range of 1-10 m/s (197-1969 fpm) and includes a mounting bracket for quick duct mounting. The AVFS Series Adjustable Air Flow Switches come in a compact, rugged PBT enclosure that is rated NEMA 4X (IP65), making them ideal for any ventilation system installation or similar BAS application.

## **APPLICATIONS**

- · Fan monitoring
- · Filter monitoring
- Damper feedback
- Air handlers

XX

Model AVFS-01, 80-250 AC/DC Power Thermo Air Fow Switch Model AVFS-02, 24 VDC Power Thermo Air Fow Switch

## **SPECIFICATIONS**

Air Velocity Range: 197-1969 FPM (1-10 m/s). Temperature Limits: 5 to 122°F (-10 to 50°C).

Humidity Limits: 0-90% RH.

Wetted Materials: PBT body, titanium sensor. Maximum Pressure: 14.7 psig (1 bar).

Housing: PBT. Repeatability: 5%.

Contact Rating: 3 A (30 VDC/250 VAC).

Response Time: 3-60 seconds. Varies with flow and set point.

**Power Requirement:** 

AVFS-01: 80...250 AC/DC (47...63 Hz AC).

AVFS-02: 24 VDC ±25%. Power Consumption: 3 VA.

Electrical Connection: 6.5 ft (2 m) cable. Enclosure Rating: NEMA 4X (IP65). Display: 1 Red LED/1 Green LED.

Weight: 7.2 oz (203 g). Agency Approvals: CE.