




Series  
PV

# Solenoid Pilot Valve

Low Cost, Compact Design, For Use with SAV Angle Seat Valves

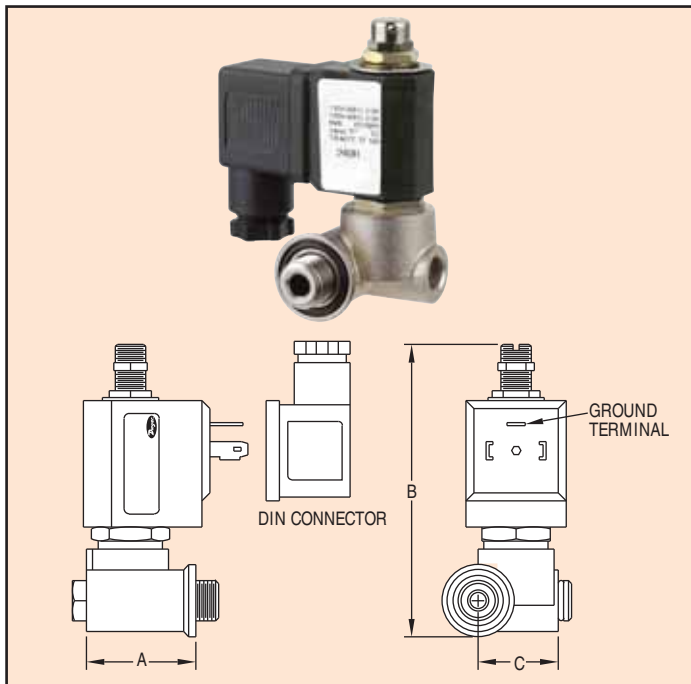

The Series PV three-way normally closed electro-pneumatic solenoid pilot valve can be direct mounted to operate the Series SAV Angle Seat Valve actuators. When the solenoid valve receives the electric input signal, it switches the pneumatic supply pressure to the actuator, which moves the valve from the closed to open position, or reversely for normally open valves. When the input to the solenoid valve stops, the pneumatic supply pressure is again blocked, and the valve returns to the normal position. Suitable for use with air or other inert gases, the valve is supplied with a DIN connector, and is fitted with a manual override. Water can also be used as a pilot media provided that a suitable drain line is attached to the exhaust outlet. Select the proper model according to the SAV valve actuator diameter and power requirements.

## SPECIFICATIONS

**Pilot Media:** Air, water, or inert gases.

**Power Requirements:** See Model Chart.

### Wetted Materials:

Body: Niploy coated brass.

Seal: FKM.

**Maximum Supply Temperature:** 150 psig (10.3 bar).

**Temperature Limits:** 14 to 140°F (-10 to 60°C).

**Actuator Connection:** PV1\_: 1/8" BSP; PV2\_, PV3\_: 1/4" BSP.

**Pilot Media Connection:** 1/8" NPT.

### Coil Consumption:

PV1\_, PV2\_: AC: 9A (res.), 14A (ind.); DC: 6A.

PV3\_: AC: 15A (res.), 30A (ind.); DC: 10A.

**Mounting:** Banjo connection.

**Enclosure Rating:** IP65 (with DIN connector).

**Standard Features:** Manual override, DIN connector.

Model	Voltage	SAV Actuator Diameter	DIMENSIONS		
			A in. (mm)	B in. (mm)	C in. (mm)
PV11	240VAC	1-3/4"	1-1/4 (31.8)	3-1/32 (77.0)	1-1/16 (27.0)
PV12	120VAC				
PV13	24VAC				
PV14	24VDC	2-1/2"	1-3/8 (35.0)	3-1/16 (77.8)	1-1/16 (27.0)
PV21	240VAC				
PV22	120VAC				
PV23	24VAC				
PV24	24VDC	3-9/16"	1-3/8 (35.0)	3-3/4 (95.3)	1-1/16 (27.0)
PV31	240VAC				
PV32	120VAC				
PV33	24VAC				
PV34	24VDC				