




Series
BBV-0

2-Valve Block Manifold

Stainless Steel Body, NPT Connections

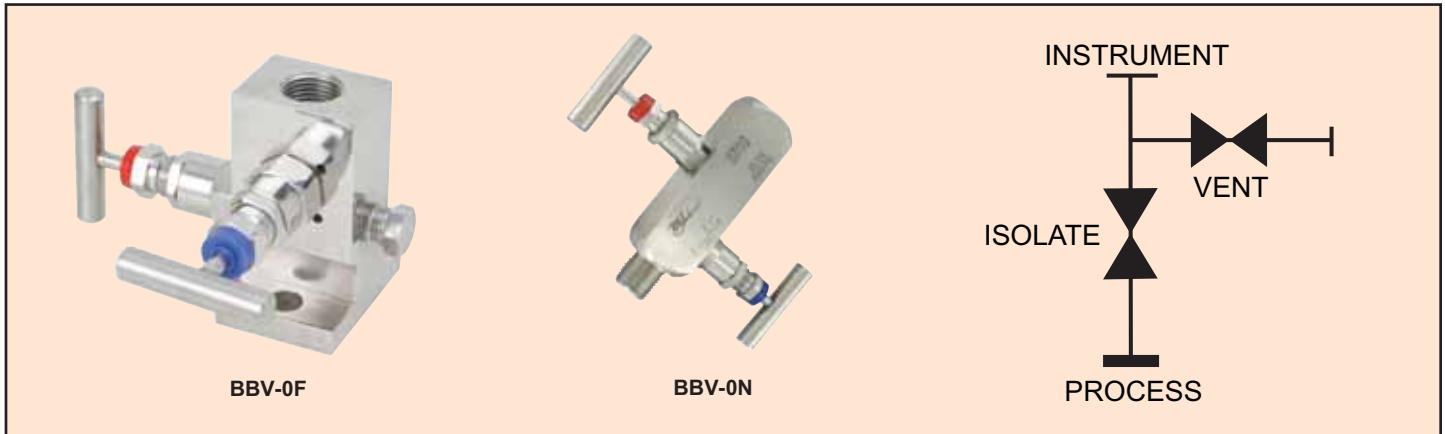

The Series BBV-0 2-Valve Block Manifold is perfect for use over a broad range of industrial applications including oil refineries, nuclear power stations, petrochemical processing, and more. The Series BBV-0 is forged from 316 stainless steel bar stock and designed to withstand repeated open and close operations. Suited to control oil, water, toxic fluids, chemicals, air, and steam; the 2-valve block manifold has (1) isolate and (1) vent valves. Each valve stem is precision machined with hard seats to reduce operating torque.

The BBV-0F and BBV-0N are designed to mount directly to industrial pressure transmitters. The BBV-0F comes with two 7/16-20 UNF mounting bolts and one PTFE gasket.

Model	Description
BBV-0F	Flanged 2-valve block manifold
BBV-0N	2-valve block manifold

SPECIFICATIONS

Service: Compatible liquids, gases, or steam.

End Connections:

Process connection: 1/2" female NPT;

Instrument connection:

No flange: 1/2" male NPT;

Flange: 1/2" DIN 19213 flange;

Vent/test: 1/4" female NPT.

Wetted Materials:

Body, stem, valve assembly: 316 SS;

Stem packing: PTFE.

Pressure Limit: 6000 psi (400 bar).

Temperature Limit: 464°F (240°C).

Other Materials: Handle: 304 SS.