



Rail Car Rupture Disks

...Ideal for RAILROAD Tank Cars

Features

- Allows extended use for a full year without change-out regardless of number of trips logged
- Unaffected by virtually all corrosives except elemental Fluorine
- Provides maximum full bore venting capacity
- Supplied in two styles to fit either metal seated or fully rubber covered 2" AAR safety vents
- Both Model AC and RC carried in stock for immediate delivery
- Steel armored for added strength
- Flexible liner used on pressure side to automatically provide a degree of temporary reclosure after venting an overpressure incident
- TFE lined on pressure side
- TFE coated on vent side to prevent chemical attack from either side
- High Visibility Green TFE Coating: Visual indication of disk integrity and easy inspection


Model AC

Designed for fully rubber covered 2" safety vents without precise seats. This disk features a larger outside diameter.

Gasketing

Non asbestos on vent side VITON on pressure side

AAR 2" rubber covered safety vent accepts ZOOK Model AC Disk

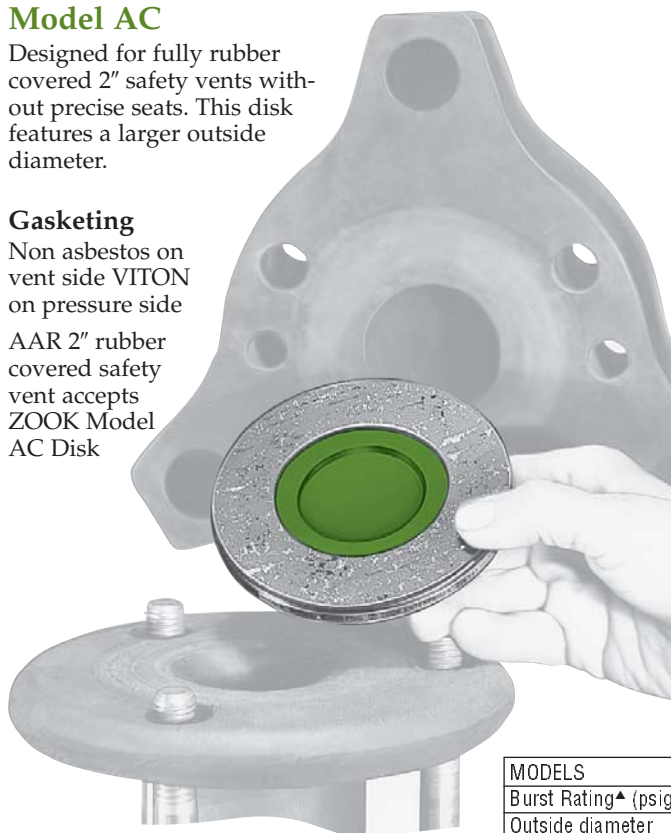

VITON - TM DuPont




United States Operations
ZOOK Enterprises, LLC
 16809 Park Circle Drive
 Chagrin Falls, OH 44022
 Toll Free **800.543.1043**
 Phone **440.543.1010**
 Fax **440.543.4930**
 E-mail **sales@zook.cc**

Canadian Operations
ZOOK Canada, Inc.
 4400 South Service Road
 Burlington, ON Can. L7L 5R8
 Toll Free **800.370.6057**
 Phone **905.681.2885**
 Fax **905.681.8838**
 E-mail **sales.canada@zook.cc**

European Operations
ZOOK Europe, LTD.
 Unit 1.14, Great House Waterside Business Park
 Redwall Close, Rotherham Road
 Dinnington, Sheffield UK. S25 3QA
 Phone **0044 (0) 1909 560999**
 Fax **0044 (0) 1909 560860**
 E-mail **zookeurope@zook.cc**

visit us on the web at www.zook.cc

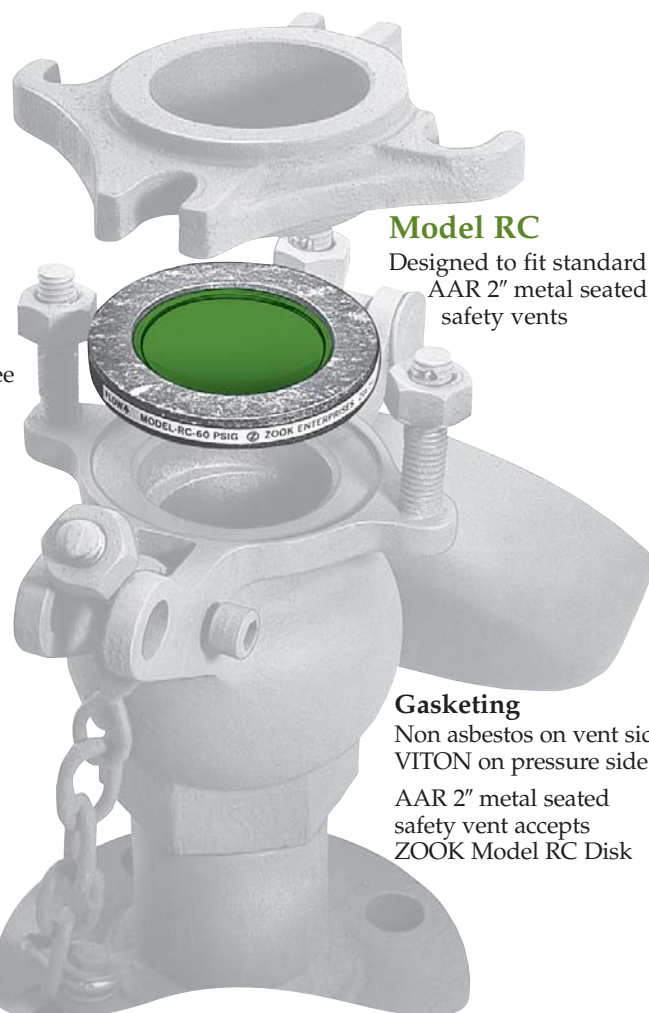

Model RC

Designed to fit standard AAR 2" metal seated safety vents

Gasketing

Non asbestos on vent side VITON on pressure side

AAR 2" metal seated safety vent accepts ZOOK Model RC Disk

MODELS	RC60	RC100	RC165
Burst Rating [▲] (psig)	60	100	165
Outside diameter	3-1/8"		

▲ Special burst ratings available

Note:

From each lot of ZOOK Rupture Disks, at least two disks are burst in the appropriate AAR safety vent to qualify burst rating as specified in AAR A5.03. Additionally, these disks have been qualified for -15% +0% tolerance per AAR A5.04.

MODELS	AC60	AC100	AC165
Burst Rating [▲] (psig)	60	100	165
Outside diameter	4-3/4"		

▲ Special burst ratings available

Bulletin no. 36782 Rev. 2
 © 2002, 2007 ZOOK Enterprises, LLC, all rights reserved
 Printed in U.S.A. 2-07-2500-5M-CGG

