




TD Transportation Rupture Disks

...designed specifically for use in OVER-THE-ROAD Tank Trailer applications

Superior fatigue resistance allows extended use for a full year without change-out regardless of number of trips logged.

Fail Safe Design: TD Disks will rupture prematurely when installed upside down.

High Visibility Green TFE Coating: Visual indication of disk integrity and easy inspection.

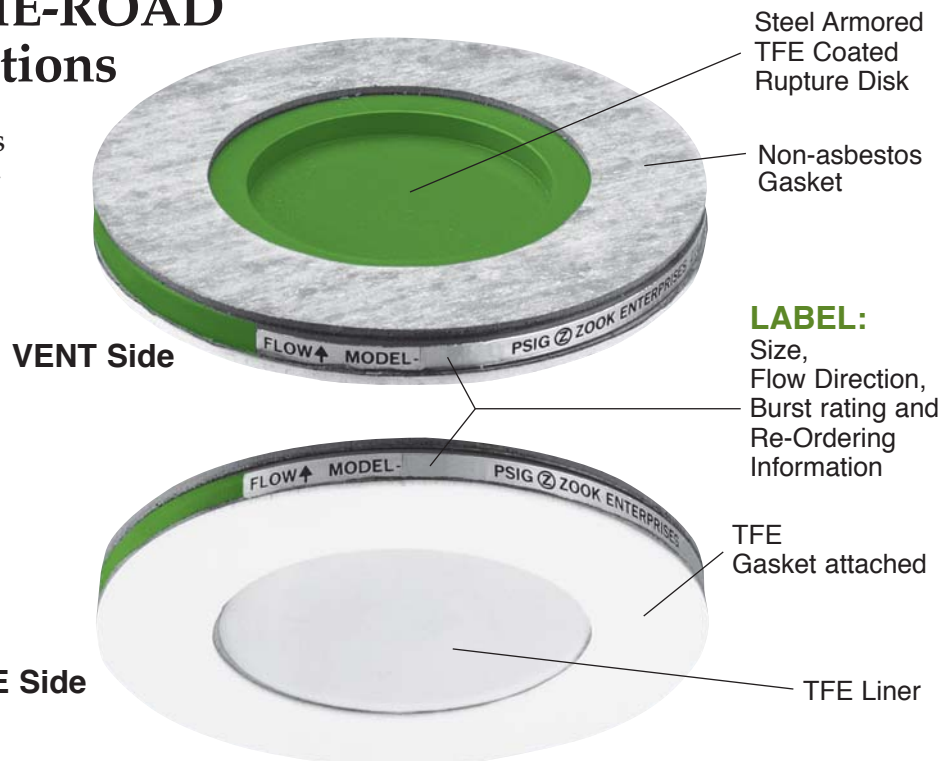

Features

- Provides reliable high performance at low cost
- Unaffected by virtually all corrosives except elemental Fluorine
- Replaces lesser performing metal and graphite type disks
- Operating pressures to 90% of the disk's marked burst pressure
- No disk holder required
- Fits ANSI Class 150 flanges
- Sizes 2", 3", 4"
- Stocked ratings 30, 35, 40, 45, 50 psi
- Temperature ratings to 72°F (22°C) (Contact ZOOK for other sizes, burst and temperature ratings)
- Burst performance: $\pm 5\%$ of the marked burst rating
- 0% manufacturing range
- ASME UD marking available

Dimensions

Rupture Disk Nominal Size	Thickness Includes gaskets	Outside Diameter
2"	.375"	4"
3"	.375"	5 1/4"
4"	.375"	6 3/4"

Bulletin no. 36852 Rev. 2
© 2001, 2002, 2007 ZOOK Enterprises, LLC, all rights reserved
Printed in U.S.A. 2-07-2500-5M-CGG
TD, TM ZOOK Enterprises, LLC



United States Operations
ZOOK Enterprises, LLC
16809 Park Circle Drive
Chagrin Falls, OH 44022
Toll Free **800.543.1043**
Phone **440.543.1010**
Fax **440.543.4930**
E-mail **sales@zook.cc**

Canadian Operations
ZOOK Canada, Inc.
4400 South Service Road
Burlington, ON Can. L7L 5R8
Toll Free **800.370.6057**
Phone **905.681.2885**
Fax **905.681.8838**
E-mail **sales.canada@zook.cc**

European Operations
ZOOK Europe, LTD.
Unit 1.14, Great House Waterside Business Park
Redwall Close, Rotherham Road
Dinnington, Sheffield UK. S25 3QA
Phone **0044 (0) 1909 560999**
Fax **0044 (0) 1909 560860**
E-mail **zookeurope@zook.cc**



visit us on the web at www.zook.cc