




Model
PM-2

Digital Pen Meter with Phase Rotation

Measures DC/ AC Voltage, Resistance, Continuity, Frequency and Phase Rotation

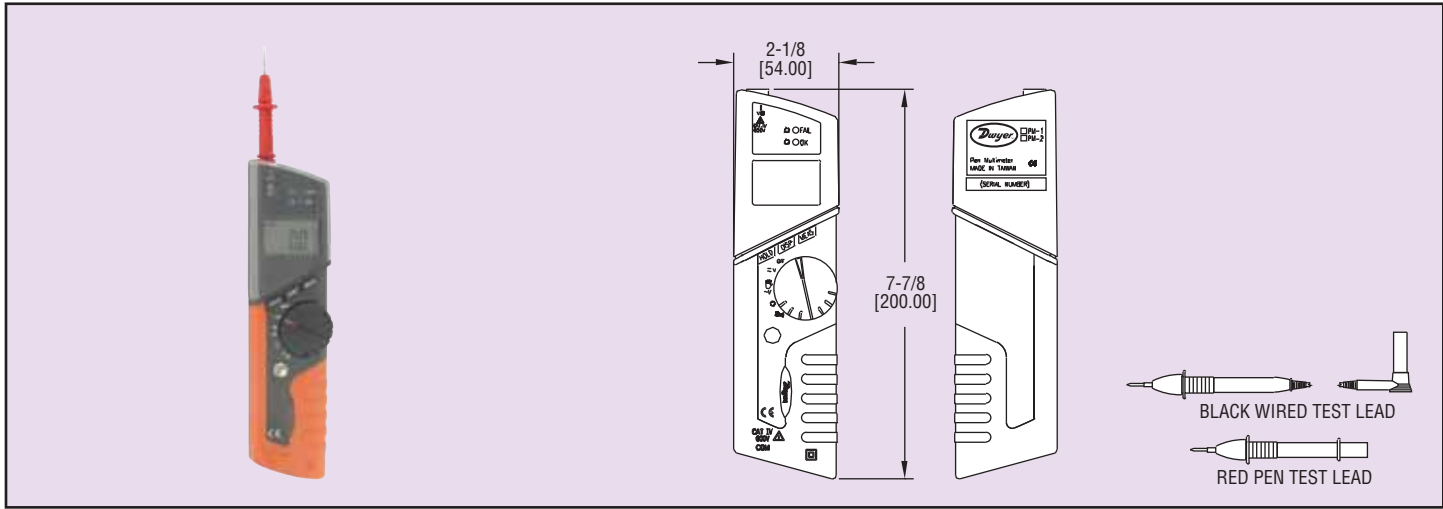

Our compact, low cost **Model PM-2 Digital Pen Meter** is ideal for general electrical testing and troubleshooting. A few applications include HVAC, automotive, electrical/power, and environmental monitoring uses. This meter measures DC and AC voltage to 600 V and resistance to 1499 Ω . In addition to volts and ohms, this meter includes continuity, diode, and frequency tests to 69.9 Hz. Along with the mentioned functions, the PM-2 has the ability to perform a phase test from 100 to 600 V. This meter features data hold, display (to show voltage and frequency during AC tests), and clear screen buttons. The 4 digit LCD features value, mode, and low battery indication. The Model PM-2 is furnished with red and black test leads, 2 AA batteries and carrying case with belt clip.

Model PM-2, Digital Pen Meter with Phase Rotation

SPECIFICATIONS

- Over Voltage Category:** CAT IV 600 V.
- AC Voltage:** 1.5 V to 600 V \pm (1.5%rdg+5dgt).
- DC Voltage:** 1.5 V to 600 V \pm (0.8%rdg+dgt).
- Resistance:** 1 to 1499 ohm \pm (1.0%+5dgt).
- Continuity:** Audible buzzer.
- Phase Test:** 100 to 600 V.
- Frequency:** 0.1 Hz to 69.9 Hz \pm (1.0%+2).
- Display:** 6000 counts plus decimal point.
- Power Requirements:** 2 AA batteries.
- Weight:** 5.3 oz (150 g).