


# HS703 Pneumatic Pressure Comparison Pump

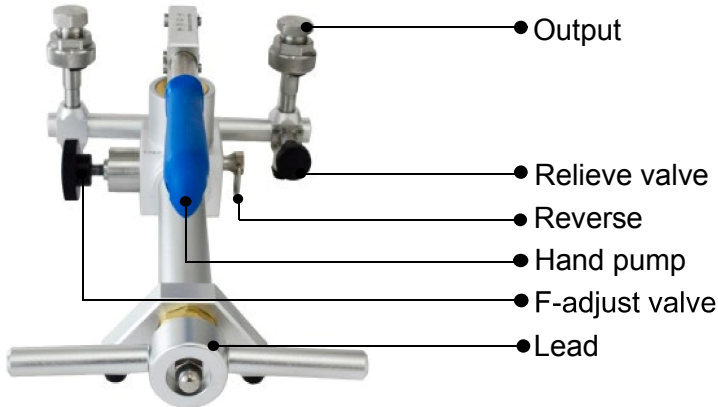

- 1. Great stability
- 2. Portable, only 2.7kg
- 3. High resolution 0.1mbar

## Description

HS703 Pneumatic Pressure Comparison Pump is portable structure and designed to generate pressure from vacuum to 60bar. Built-in filter protects the pump from dirty and make maintenance easy and convenient. The F-adjust valve could accomplish 0.1mbar pressure resolution. Especially the lever lead screw design makes user operate in economize labor. the design of reverse valve makes the switch of vacuum and positive pressure more smooth. Two standard pressure outputs are easy to connect gauges under test without using the wrenches. It widely calibrates pressure instruments in field and laboratory.

## Specifications

- **Generated pressure range:**  
(-0.95-16/25)bar The model HS702  
(-0.95-40/60)bar The model HS703
- **Working media:**Air
- **Adjust resolution:**0.1 mbar
- **Material:**  
Body:Stainless steel /Aluminium  
Seals:Buna-N
- **Output interface connection:**  
M20×1.5Female
- **Weight:**2.7kg
- **Dimensions:**286L×198W×140H (mm)



## Ordering Code

### Model

HS702	Model
HS703	

M -M20×1.5 F	M-Connection
N4-1/4"NPT F	
N4Type,MOQ 5pcs	

### Standard delivery

Seals ring:10pcs  
Test report:1copy  
Manual:1copy

## Optional Accessories

Model	Description
HS703-HSPA01	Fitting adaptor 10pcs
HS703-HSPA02	Fitting adaptor 10pcs
HS703-HSPA18	Fitting adaptor 18pcs
HS703-HSPA64	Fitting adaptor,hose,wrenches and so on (64pcs)
HS703-8	Digital pressure gauge HS108 or HX601 uses as master gauge
HS703-2	Pressure calibrator HS602 for calibration pressure transmitter