
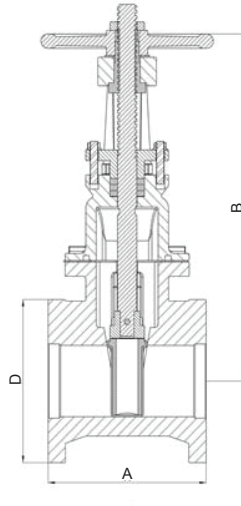


# OS&Y Resilient Wedge Gate Valve

## Model 103 FF

UL Listed / FM Approved

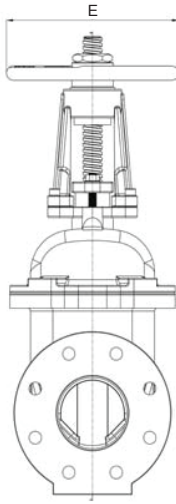

### Valve Standard

Conforms to AWWA C509

### Pressure & Rating

Non-Shock Cold Working Pressure, 300 PSI/20.7 Bar (Sizes 2 1/2"-10") 250PSI/17.2 Bar (Size 12")  
(160° F/71° C max. operating temperature)

Outside Screw and Yoke · Resilient Wedge ·  
Epoxy Coated Interior/Exterior  
Pre-Grooved Stem for Supervisory Switch

Electrostatically applied fusion - bonded epoxy 0.2-0.5 mm. inside and outside as per AWWA C-550.

Drilled, Tapped and Plugged at Boss Location A: 1/2" - valve sizes 2 1/2" - 4"  
3/4" - valve sizes 6" - 8"  
1" - valve sizes 10" - 12"

Size	65 mm	80 mm	100 mm	150 mm	200 mm	250 mm	300 mm
A	190	203	229	267	292	330	356
B (Open)	453	500	534	744	939	1139	1326
B (Closed)	378	405	422	581	724	877	1014
D	178	191	229	279	343	406	483
E	200	200	260	315	375	416	445
Turns to Open	8.8	10.5	13	15.7	17.2	21.4	25.5
Weight (Kg)	20	24	43	70	112	159	220

Freezing weather precaution - subsequent to testing a piping system, valves should be in an open position to allow complete drainage.  
Option of PN-16, ANSI-125 and ANSI150 available

Continued overleaf  
Page 1 of 2

Rapidrop Global

Rutland Business Park, Newark Road, Peterborough, PE1 5WA, United Kingdom

© 2014 Rapidrop  
Rapidrop® is a registered trade mark.  
Rapidrop Global Limited  
Registered in England No. 5503278

Tel: +44 (0) 1733 847 510 Fax: +44 (0) 1733 553 958  
e-mail: rapidrop@rapidrop.com web: www.rapidrop.com





# OS&Y Resilient Wedge Gate Valve

## Model 103 FF

UL Listed / FM Approved

### Material Specifications

Valve Body	Ductile Iron ASTM A 536
Resilient Wedge	Ductile Iron ASTM A 536/EPDM ASTM D 2000
Wedge Nut	Bronze ASTM B 584 UNS C83600
Dowel Pin	Stainless Steel ASTM A 276 UNS S42000
Stem Back Seat O-Ring	EPDM ASTM D 2000
Bonnet Gasket	EPDM ASTM D 2000
Bonnet	Ductile Iron ASTM A 536
Stem Packing	EPDM ASTM D 2000
Threaded Rod	Carbon Steel Zinc Plated
Gland Bushing	Bronze ASTM B 584
Gland	Cast Iron ASTM A 126-B
Gland Nut	Brass ASTM A 536
Yoke Screw	Alloy Steel ASTM A 574M Zinc Plated
Yoke	Ductile Iron ASTM A 536
Yoke Bushing	Bronze ASTM B 584 Alloy Steel ASTM F 912M Black Oxide
Yoke Bushing Retainer	Cast Iron ASTM A 126-B
Handwheel	Ductile Iron ASTM A 536
Handwheel Nut	Carbon Steel ASTM A 574
Flat Head Screw	Carbon Steel Zinc Plated
Stem	Bronze ASTM B 150 UNS C61400
Bonnet Screw	Alloy Steel ASTM A 574M Zinc Plated
NPT Pipe Plug	Brass HPb 63-0.1

